


# 70 SERIES




**SIGNS  
MAINTAINED BY  
OTHERS**



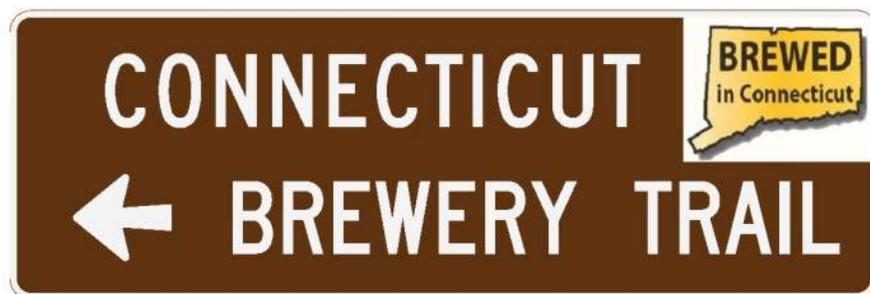

# SIGN DETAIL

## LOGO PANEL FOR FREEWAY

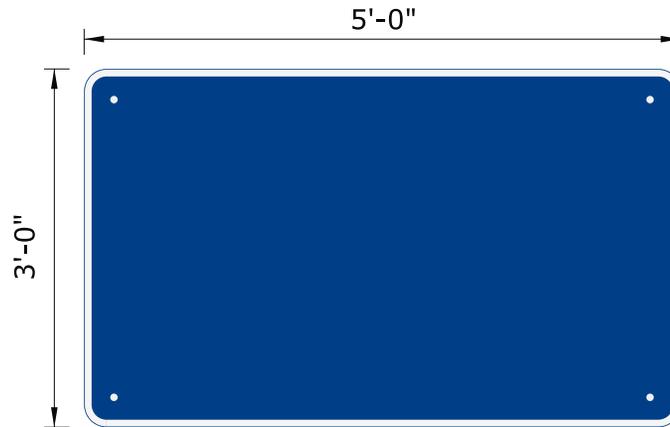


SIGN NUMBER	71-1022
SIGN PANEL	5'-0" x 3'-0"
EXIT CROWN	—
TOTAL AREA	15.0 Sq.Ft.
BDR INSET/WIDTH	0" / 0.75"
CORNER RADIUS	2.25"
BACKGROUND	TYPE: IX
	COLOR: Blue
LEGEND/BORDER	TYPE: IX
	COLOR: /White

March 18, 2019

### NOTES:

1. ALL HOLES SHALL BE  $\frac{3}{8}$ " IN DIAMETER.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
4. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
5. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE, WHEN NO SYMBOL OR TRADEMARK IS USED.
6. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE, WHEN NO SYMBOL OR TRADEMARK IS USED.
7. SYMBOL OR TRADEMARK AND A  $\frac{3}{4}$ " WHITE BORDER SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
8. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{3}{4}$ " WHITE BORDER.

Dimensions are in Inches.  
 Material : .040 Thick Sheet\_Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

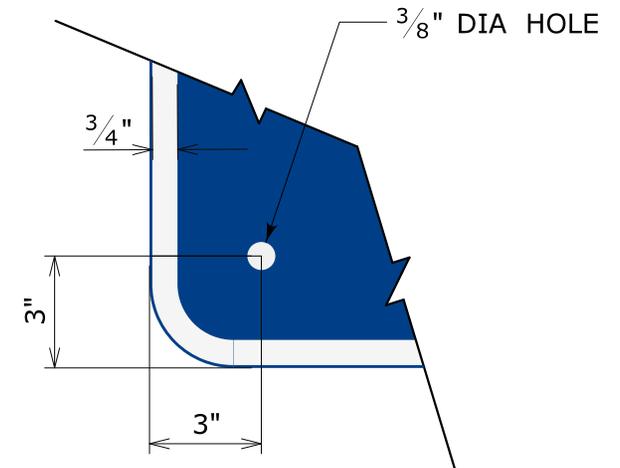


TYP. PUNCHING STANDARD

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	8
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	5

# SIGN DETAIL

## LOGO PANEL FOR FREEWAY

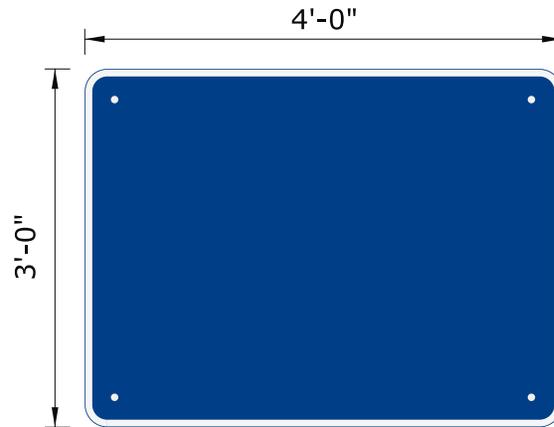


SIGN NUMBER	71-1023
SIGN PANEL	4'-0" x 3'-0"
EXIT CROWN	---
TOTAL AREA	12.0 Sq.Ft.
BDR INSET/WIDTH	0" / 0.75"
CORNER RADIUS	2.25"
BACKGROUND	TYPE: IX
	COLOR: Blue
LEGEND/BORDER	TYPE: IX
	COLOR: /White

March 18, 2019

### NOTES:

1. ALL HOLES SHALL BE  $\frac{3}{8}$ " IN DIAMETER.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
4. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
5. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE, WHEN NO SYMBOL OR TRADEMARK IS USED.
6. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE, WHEN NO SYMBOL OR TRADEMARK IS USED.
7. SYMBOL OR TRADEMARK AND A  $\frac{3}{4}$ " WHITE BORDER SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
8. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{3}{4}$ " WHITE BORDER.

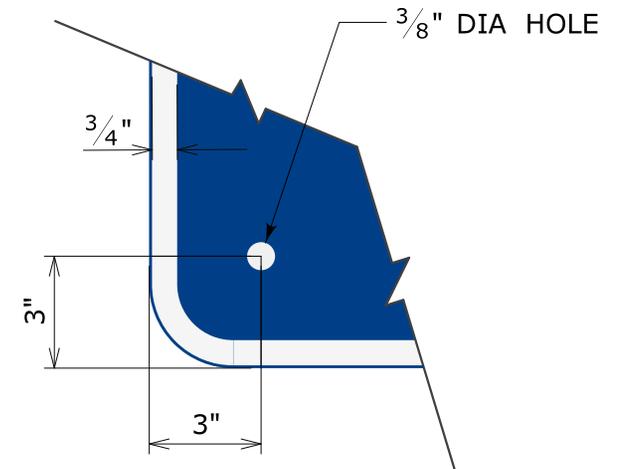

TYP. PUNCHING STANDARD

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	8
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	5

Dimensions are in Inches.

Material : .040 Thick Sheet\_Aluminum

Mounted : Ground

Division of Traffic Engineering










# SIGN DETAIL

1:25

## TRAILBLAZER FOR CONVENTIONAL ROADS

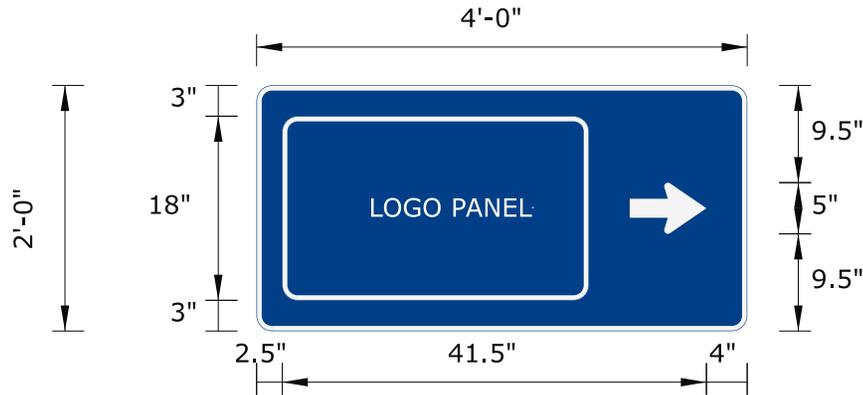

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

SIGN NUMBER	71-1029
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX
	COLOR: Blue
ARROW/BORDER	TYPE: IX
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	270	36.5	9.5	5	7.5
Logo Panel	0	2.5	3	30	18

FILE : 72-1029

6/25/2020

## LOGO DETAIL NOTES :

1. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
4. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
5. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
6. SYMBOL OR TRADEMARK AND A  $\frac{59}{64}$ " WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
7. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{1}{2}$ " WHITE BORDER WITH 1.5" CORNER RADIUS.

Dimensions are in Inches

Material : .100 Thick Sheet Aluminum


Ground Mounted

Division of Traffic Engineering

# SIGN DETAIL

1:25

## TRAILBLAZER FOR CONVENTIONAL ROADS

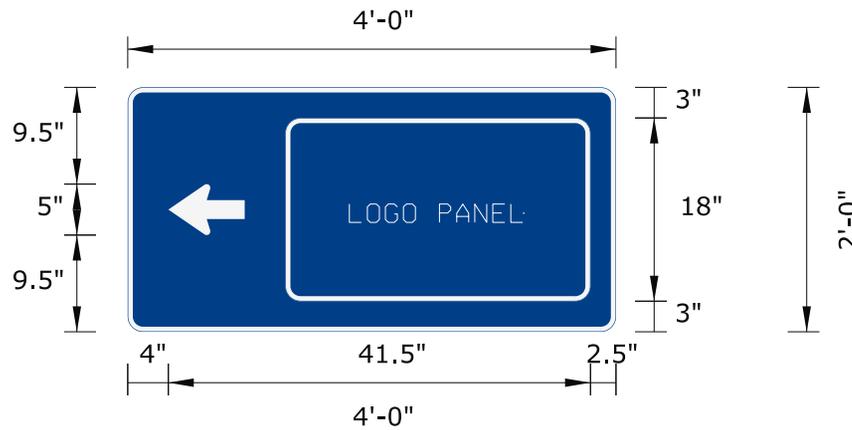

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

SIGN NUMBER	71-1030
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX COLOR: Blue
ARROW/BORDER	TYPE: IX COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	90	4	9.5	5	7.5
Logo Panel	0	2.5	3	30	18

FILE : 71-1030

6/25/2020

### LOGO DETAIL NOTES :

1. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
4. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
5. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
6. SYMBOL OR TRADEMARK AND A <sup>59</sup>/<sub>64</sub>" WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
7. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS.

Dimensions are in Inches


Material : .100 Thick Sheet Aluminum

Ground Mounted

Division of Traffic Engineering

**SIGN DETAIL**  
1:25

**TRAILBLAZER FOR  
CONVENTIONAL ROADS**

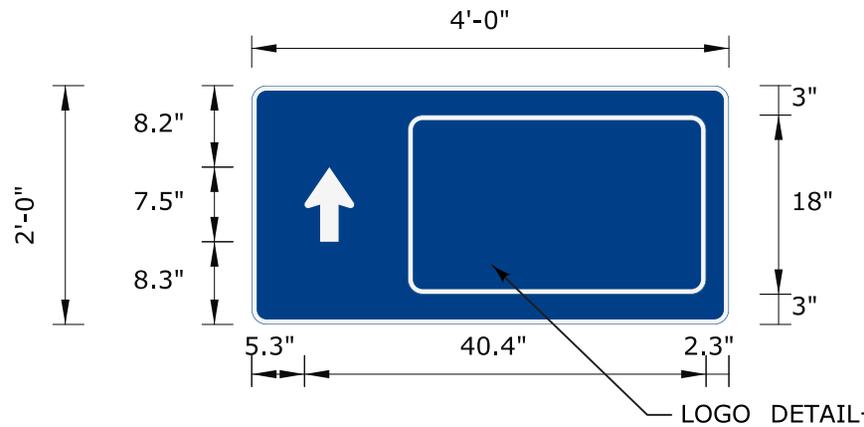

SIGN NUMBER	71-1031
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX COLOR: Blue
ARROW/BORDER	TYPE: IX COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	180	5.3	8.3	5	7.5
Logo Panel	0	15.7	3	30	18

FILE : 71-1031

Mar 18, 2019

**LOGO DETAIL NOTES :**

1. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
4. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
5. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
6. SYMBOL OR TRADEMARK AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
7. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS.

Dimensions are in Inches  
Material : .100 Thick Sheet Aluminum  
Ground Mounted  
Division of Traffic Engineering


**MINIMUM LETTER AND NUMERAL  
SIZES FOR LOGO PANEL**

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

# SIGN DETAIL

1:25

# TRAILBLAZER FOR RAMPS

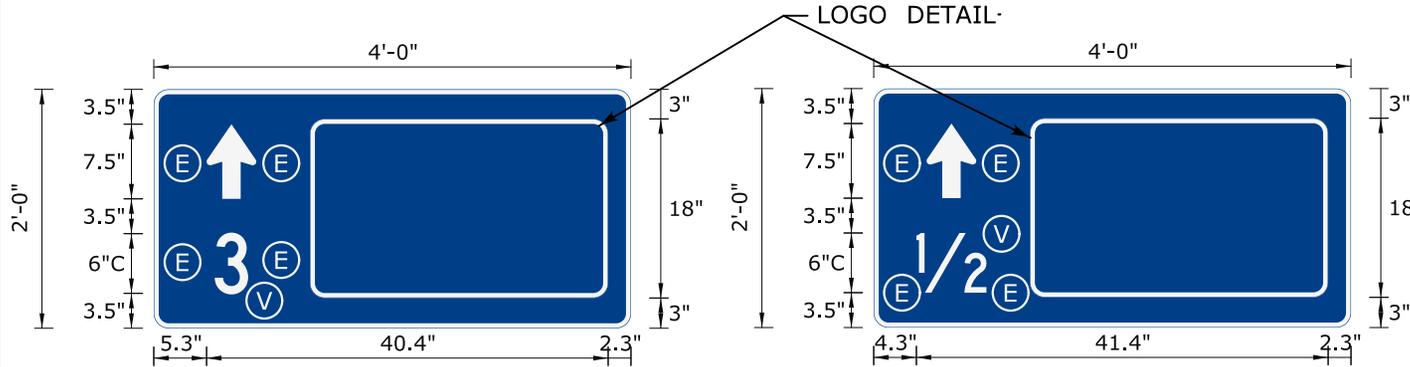

LETTER POSITIONS (X) LENGTH SERIES/SIZE				
	3			C 2000
6.1	0		3.4	6

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	180	5.3	13	5	7.5
M153CT	0	15.7	3	30	18

LETTER POSITIONS (X) LENGTH SERIES/SIZE				
	1/2			C 2000
4.3	7.1		7.1	6

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	180	5.3	13	5	7.5
M153CT	0	15.7	3	30	18

SIGN NUMBER	71-1032
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX COLOR: Blue
ARROW/BORDER	TYPE: IX COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT

FILE : 71-1032

Mar 18, 2019

## LOGO DETAIL NOTES :

- SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
- ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
- SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
- LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
- VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
- SYMBOL OR TRADEMARK AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
- ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS.

(E) EQUAL SPACING FOR ARROWS AND NUMBERS (DISTANCE).

(V) VARIABLE NUMBER (DISTANCE).

## MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL



APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

Dimensions are in Inches  
 Material : .100 Thick Sheet Aluminum  
 Ground Mounted  
 Division of Traffic Engineering

# SIGN DETAIL

1:25

# TRAILBLAZER FOR RAMPS

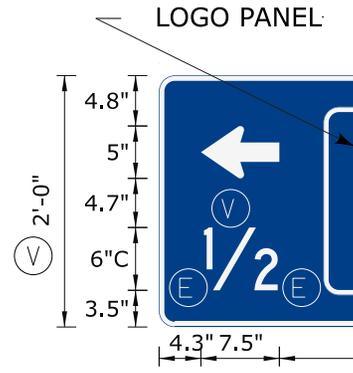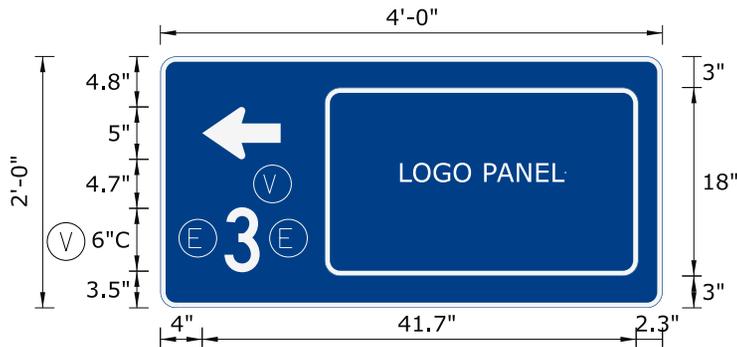

SIGN NUMBER	71-1033
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX
	COLOR: Blue
ARROW/BORDER	TYPE: IX
	COLOR: White/White

FILE :71-1033

Mar 19, 2019

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	90	5.1	13.5	5.96	5.96
Logo Panel	0	15.7	3	30	18

## LOGO DETAIL NOTES :

- SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
- ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
- SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
- LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
- VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
- SYMBOL OR TRADEMARK AND A  $\frac{59}{64}$ " WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
- ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{1}{2}$ " WHITE BORDER WITH 1.5" CORNER RADIUS.

## MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

(E) EQUAL SPACING FOR NUMBERS (DISTANCE).

(V) VARIABLE NUMBER (DISTANCE).

Dimensions are in Inches

Material : .100 Thick Sheet Aluminum


Ground Mounted

Division of Traffic Engineering

# SIGN DETAIL

1:25

# TRAILBLAZER FOR RAMPS

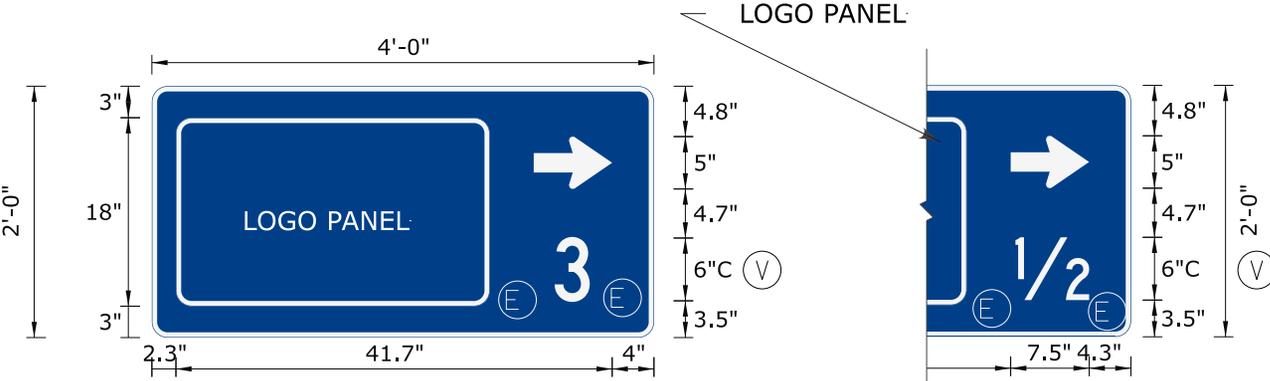

LETTER POSITIONS (X)		LENGTH	SERIES/SIZE
	3		C 2000
38.5	3.4	3.4	6
	1/2		
36.2	36.2	36.2	6

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	90	36.9	13.4	5.96	5.96
Logo Panel	0	15.7	3	30	18

SIGN NUMBER	71-1034
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX
	COLOR: Blue
ARROW/BORDER	TYPE: IX
	COLOR: White/White

FILE :71-1034

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

## LOGO DETAIL NOTES :

- SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
- ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
- SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
- LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
- VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
- SYMBOL OR TRADEMARK AND A <sup>59</sup>/<sub>64</sub>" WHITE BORDER WITH 1.5" CORNER RADIUSSES SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
- ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUSSES.

(E) EQUAL SPACING FOR NUMBERS (DISTANCE).

(V) VARIABLE NUMBER (DISTANCE).

Dimensions are in Inches


Material : .100 Thick Sheet Aluminum

Ground Mounted

Division of Traffic Engineering


SIGN DETAIL

**LOGO PANEL FOR RAMPS AND CONVENTIONAL ROADS**

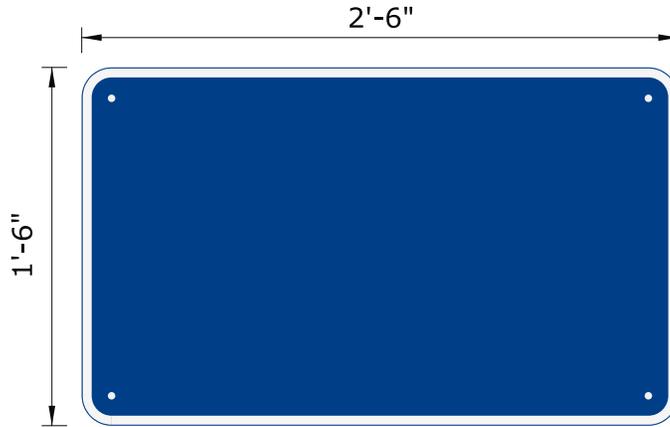

SIGN NUMBER	71-1035
SIGN PANEL	2'-6" x 1'-6"
EXIT CROWN	---
TOTAL AREA	3.75 Sq.Ft.
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX
	COLOR: Blue
LEGEND/BORDER	TYPE: IX
	COLOR: /White

March 19, 2019

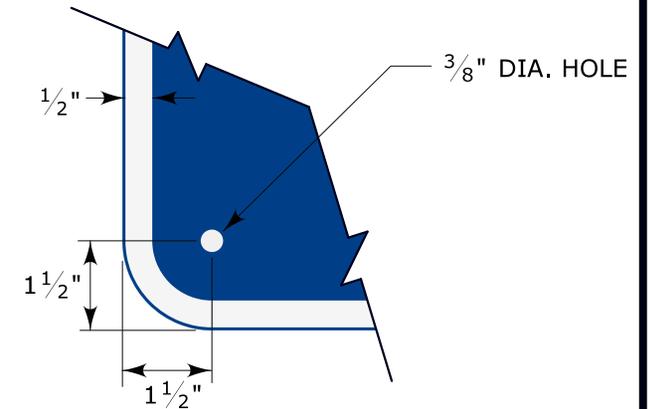

TYP. PUNCHING STANDARD

NOTES:

1. ALL HOLES SHALL BE  $\frac{3}{8}$ " IN DIAMETER.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
4. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
5. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
6. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
7. SYMBOL OR TRADEMARK AND A  $\frac{1}{2}$ " WHITE BORDER SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
8. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{1}{2}$ " WHITE BORDER.


Dimensions are in Inches.  
 Material : .040 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

**MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL**


APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

## SIGN DETAIL

1:25

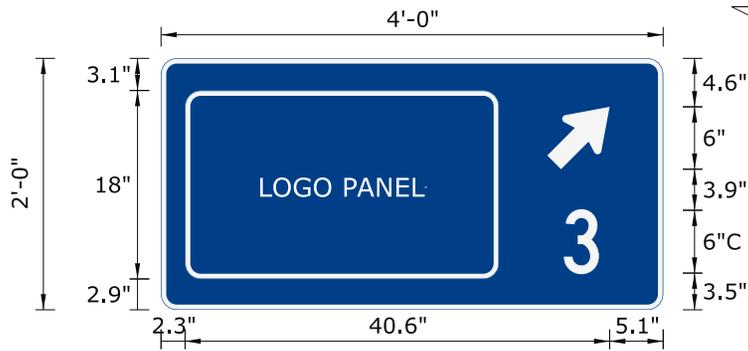

## TRAILBLAZER FOR RAMPS

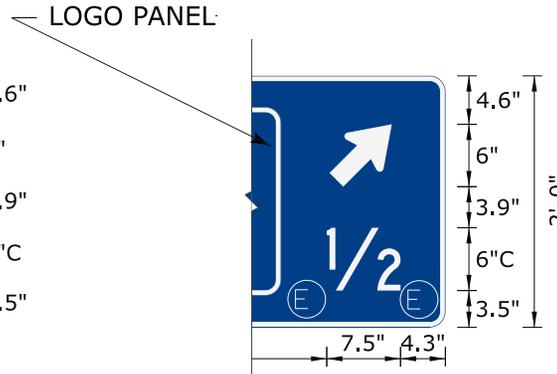

LETTER POSITIONS (X)		LENGTH	SERIES/SIZE
	3		C 2000
38.5	3.4	3.4	6
	1/2		
36.2	36.2	36.2	6

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	45	4	14.2	54	7.5
Logo Panel	0	15.7	3	30	18

SIGN NUMBER	71-1036
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX COLOR: Blue
ARROW/BORDER	TYPE: IX COLOR: White/White

FILE : 71-1036

6/24/2020

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

## LOGO DETAIL NOTES :

- SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
- ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
- SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
- LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
- VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
- SYMBOL OR TRADEMARK AND A  $59/64$ " WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
- ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $1/2$ " WHITE BORDER WITH 1.5" CORNER RADIUS.

(E) EQUAL SPACING FOR NUMBERS (DISTANCE).

(V) VARIABLE NUMBER (DISTANCE).

Dimensions are in Inches


Material : .100 Thick Sheet Aluminum

Ground Mounted

Division of Traffic Engineering

**SIGN DETAIL**  
1:35

**TRAILBLAZER FOR RAMPS**

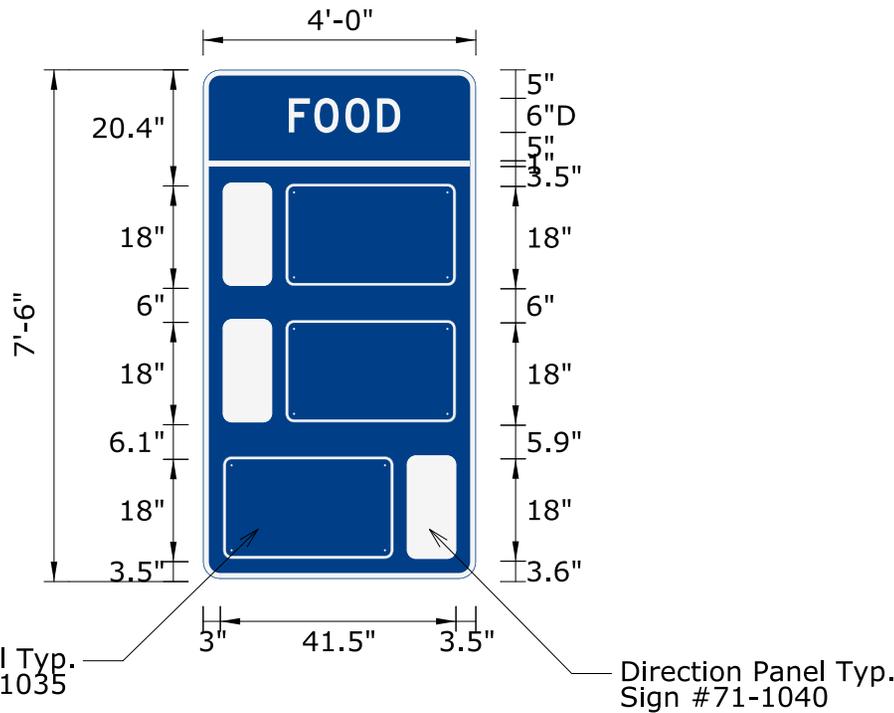

SIGN NUMBER	71-1037
PANEL SIZE	4'-0" x 7'-6"
SIGN AREA	30.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: *
	COLOR: White
LEGEND/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	3.5	51.6	8.5	18
Logo Panel	0	14.5	51.5	30	18
Direction Panel	0	3	27.6	8.5	18
Logo Panel	0	14.5	27.5	30	18
Logo Panel	0	4	3.5	30	18
Direction Panel	0	36	3.6	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER:
  - A. THROUGH (FROM NEAREST TO FARTHEST)
  - B. LEFT (FROM NEAREST TO FARTHEST)
  - C. RIGHT (FROM NEAREST TO FARTHEST)

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE : 71-1037

Jun 07, 2019

**LETTER POSITIONS (X)**


LETTER POSITIONS (X)																LENGTH	SERIES/SIZE	
	F	O	O	D													D 2000	
15.1	0	4.5	10	15.5													19.6	6



# SIGN DETAIL

1:45

## TRAILBLAZER FOR RAMPS

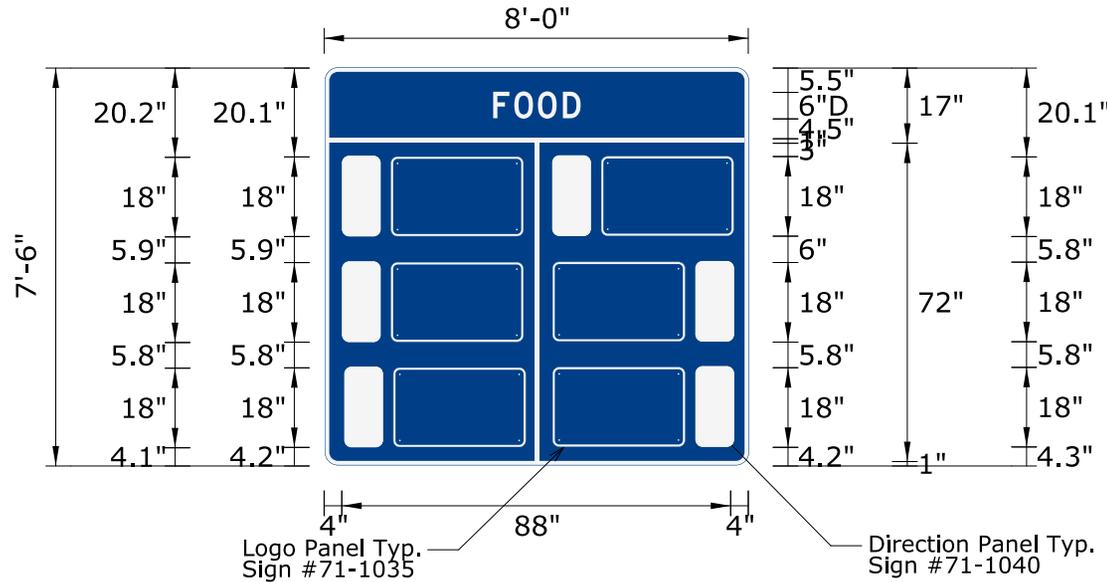

SIGN NUMBER	71-1039
PANEL SIZE	8'-0" x 7'-6"
SIGN AREA	60.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

### PANEL PLACEMENT ORDER:

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON THE DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER FROM NEAREST TO FARTHEST:
  - A. THROUGH MOVEMENT: ON THE TOP OF THE SIGN FROM LEFT TO RIGHT, AND FROM TOP TO BOTTOM, STARTING IN THE LEFT CORNER. IF APPLICABLE, THE THIRD AND FOURTH THROUGH PANELS TO BE INSTALLED IN THE SECOND ROW FROM LEFT TO RIGHT. IF APPLICABLE, THE FIFTH AND SIXTH THROUGH PANELS TO BE INSTALLED IN THE THIRD ROW FROM LEFT TO RIGHT.
  - B. LEFT TURN MOVEMENT: STARTING IN THE LEFT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE LEFT COLUMN, REMAINING LEFT PANELS TO BE INSTALLED IN THE RIGHT COLUMN BELOW THE THROUGH AND RIGHT PANELS.
  - C. RIGHT TURN MOVEMENT: STARTING IN THE RIGHT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE RIGHT COLUMN, REMAINING RIGHT PANELS TO BE INSTALLED IN THE LEFT COLUMN BELOW THE THROUGH AND LEFT PANELS.

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	4	51.9	8.5	18
Logo Panel	0	15	51.8	30	18
Direction Panel	0	51.1	52	8.5	18
Logo Panel	0	62	51.9	30	18
Direction Panel	0	4	28	8.5	18
Logo Panel	0	15	27.9	30	18
Logo Panel	0	51.5	28	30	18
Direction Panel	0	83.5	28.1	8.5	18
Direction Panel	0	4	4.2	8.5	18
Logo Panel	0	15	4.1	30	18
Logo Panel	0	51.5	4.2	30	18
Direction Panel	0	83.5	4.3	8.5	18

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE :71-1039


Jun 07, 2019

### LETTER POSITIONS (X)

LETTER POSITIONS (X)														LENGTH	SERIES/SIZE	
	F	O	O	D											D	
38.1	0	4.8	10.1	15.8											19.8	6


**SIGN DETAIL**  
1:15

**DIRECTION PANEL FOR RAMPS :**

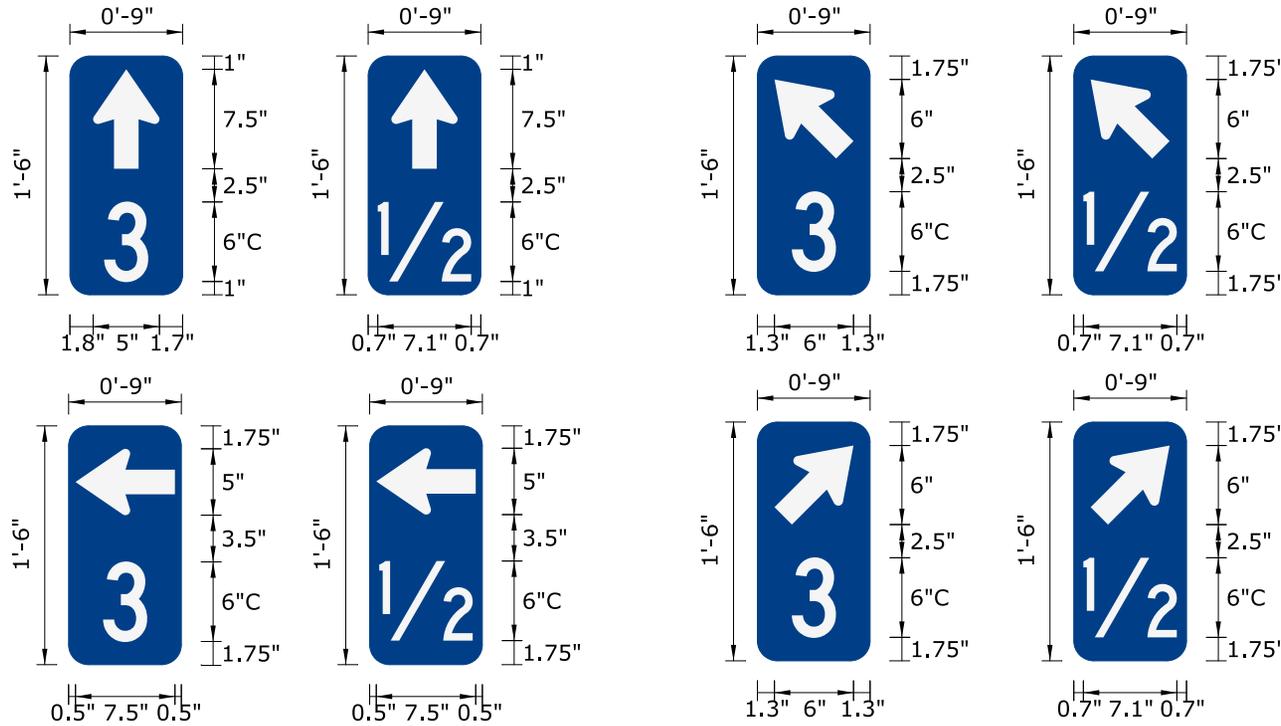

SIGN NUMBER	71-1040
PANEL SIZE	0'-9" x 1'-6"
SIGN AREA	1.1 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/Blue
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT

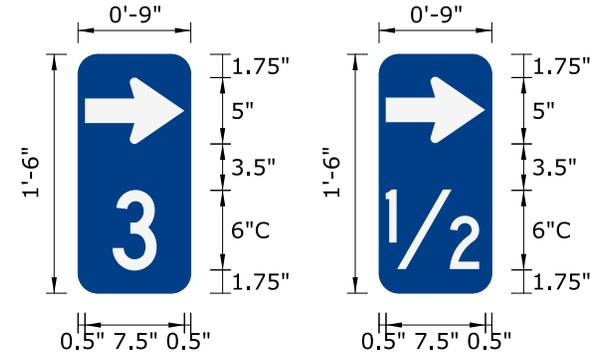


Dimensions are in Inches  
Material : .040 Thick Sheet Aluminum  
Division of Traffic Engineering  
Overlay Panel



**SIGN DETAIL**  
1:35

**TRAILBLAZER FOR RAMPS**

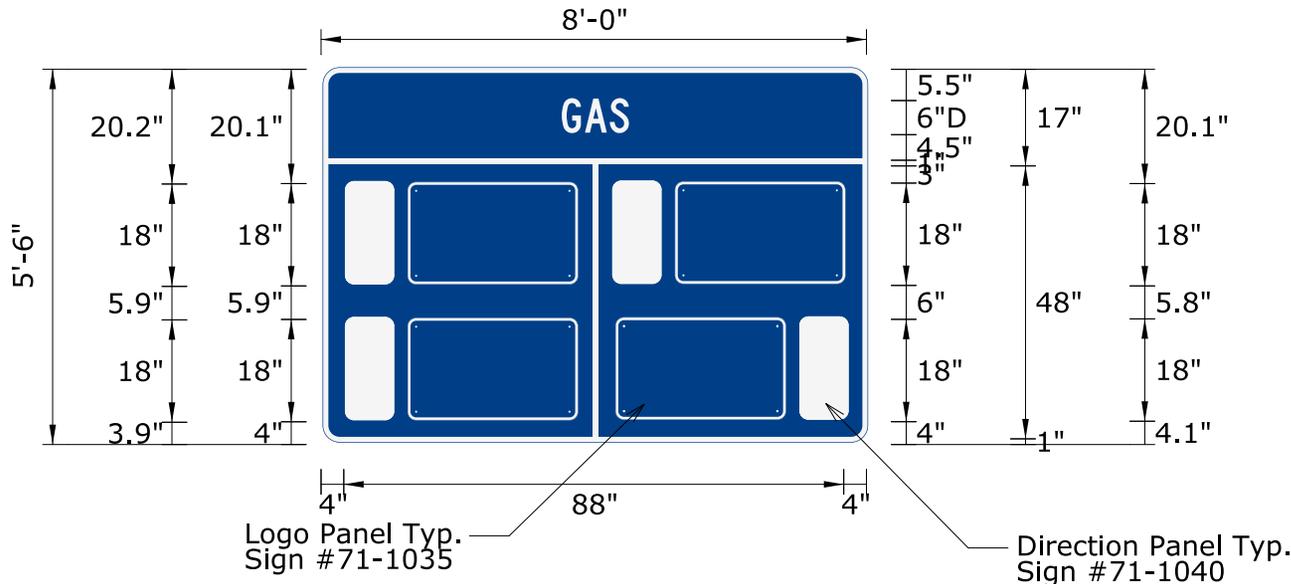

SIGN NUMBER	71-1042
PANEL SIZE	8'-0" x 5'-6"
SIGN AREA	44.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	4	27.9	8.5	18
Logo Panel	0	15	27.8	30	18
Direction Panel	0	51.1	28	8.5	18
Logo Panel	0	62	27.9	30	18
Direction Panel	0	4	4	8.5	18
Logo Panel	0	15	3.9	30	18
Logo Panel	0	51.5	4	30	18
Direction Panel	0	83.5	4.1	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON THE DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER FROM NEAREST TO FARTHEST:
  - A. THROUGH MOVEMENT: ON THE TOP OF THE SIGN FROM LEFT TO RIGHT, AND FROM TOP TO BOTTOM, STARTING IN THE LEFT CORNER. IF APPLICABLE, THE THIRD AND FOURTH THROUGH PANELS TO BE INSTALLED IN THE SECOND ROW FROM LEFT TO RIGHT.
  - B. LEFT TURN MOVEMENT: STARTING IN THE LEFT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE LEFT COLUMN, REMAINING LEFT PANELS TO BE INSTALLED IN THE RIGHT COLUMN BELOW THE THROUGH AND RIGHT PANELS.
  - C. RIGHT TURN MOVEMENT: STARTING IN THE RIGHT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE RIGHT COLUMN, REMAINING RIGHT PANELS TO BE INSTALLED IN THE LEFT COLUMN BELOW THE THROUGH AND LEFT PANELS.

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE : 71-1042

Jun 21, 2019


**LETTER POSITIONS (X)**

															LENGTH	SERIES/SIZE	
	G	A	S													C 2000	
42.1	4.1	4.4	3.4	42.1												11.8	6

**SIGN DETAIL**

1:45

**TRAILBLAZER FOR RAMPS**

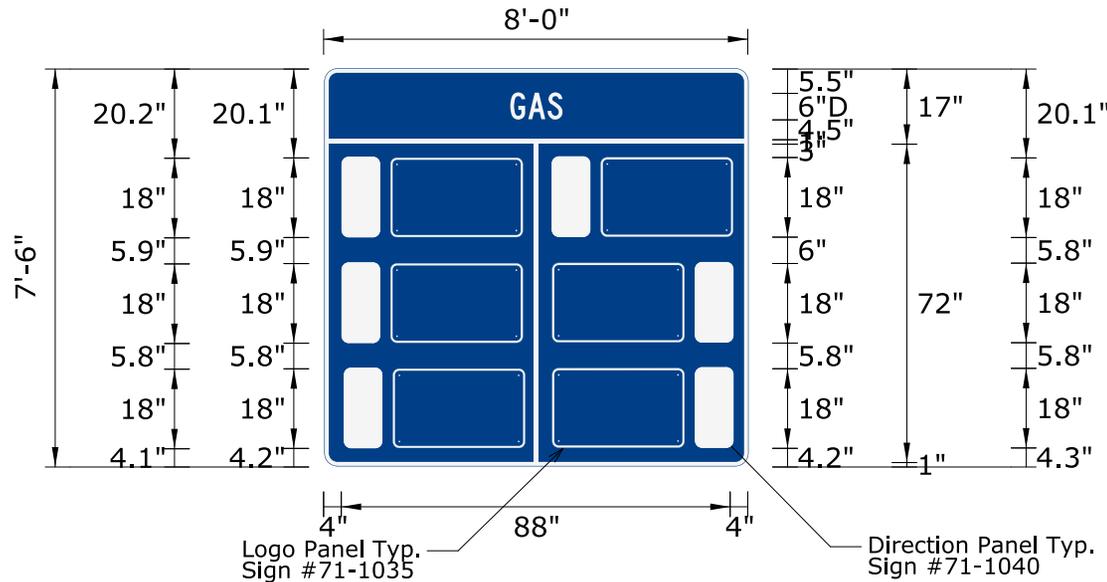

SIGN NUMBER	71-1043
PANEL SIZE	8'-0" x 7'-6"
SIGN AREA	60.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	4	51.9	8.5	18
Logo Panel	0	15	51.8	30	18
Direction Panel	0	51.1	52	8.5	18
Logo Panel	0	62	51.9	30	18
Direction Panel	0	4	28	8.5	18
Logo Panel	0	15	27.9	30	18
Logo Panel	0	51.5	28	30	18
Direction Panel	0	83.5	28.1	8.5	18
Direction Panel	0	4	4.2	8.5	18
Logo Panel	0	15	4.1	30	18
Logo Panel	0	51.5	4.2	30	18
Direction Panel	0	83.5	4.3	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON THE DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER FROM NEAREST TO FARTHEST:
  - A. THROUGH MOVEMENT: ON THE TOP OF THE SIGN FROM LEFT TO RIGHT, AND FROM TOP TO BOTTOM, STARTING IN THE LEFT CORNER. IF APPLICABLE, THE THIRD AND FOURTH THROUGH PANELS TO BE INSTALLED IN THE SECOND ROW FROM LEFT TO RIGHT. IF APPLICABLE, THE FIFTH AND SIXTH THROUGH PANELS TO BE INSTALLED IN THE THIRD ROW FROM LEFT TO RIGHT.
  - B. LEFT TURN MOVEMENT: STARTING IN THE LEFT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE LEFT COLUMN, REMAINING LEFT PANELS TO BE INSTALLED IN THE RIGHT COLUMN BELOW THE THROUGH AND RIGHT PANELS.
  - C. RIGHT TURN MOVEMENT: STARTING IN THE RIGHT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE RIGHT COLUMN, REMAINING RIGHT PANELS TO BE INSTALLED IN THE LEFT COLUMN BELOW THE THROUGH AND LEFT PANELS.

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE :71-1043


Jun 21, 2019

**LETTER POSITIONS (X)**

														LENGTH	SERIES/SIZE	
	G	A	S												C 2000	
42.1	4.1	4.4	3.4	42.1											11.8	6

**SIGN DETAIL**  
1:35

**TRAILBLAZER FOR RAMPS**

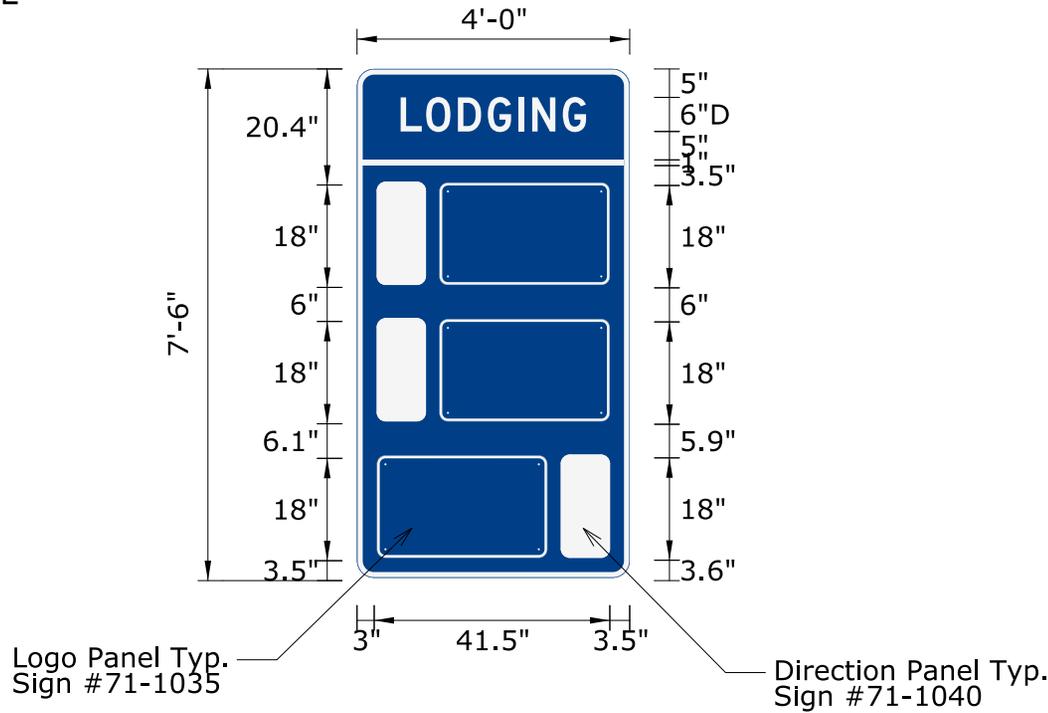

SIGN NUMBER	71-1044
PANEL SIZE	4'-0" x 7'-6"
SIGN AREA	30.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: *
	COLOR: Blue
LEGEND/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	3.5	51.6	8.5	18
Logo Panel	0	14.5	51.5	30	18
Direction Panel	0	3	27.6	8.5	18
Logo Panel	0	14.5	27.5	30	18
Logo Panel	0	4	3.5	30	18
Direction Panel	0	36	3.6	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER:
  - A. THROUGH (FROM NEAREST TO FARTHEST)
  - B. LEFT (FROM NEAREST TO FARTHEST)
  - C. RIGHT (FROM NEAREST TO FARTHEST)

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE : 71-1044


Jun 20, 2019

**LETTER POSITIONS (X)**

LETTER POSITIONS (X)																		LENGTH	SERIES/SIZE
	L	O	D	G	I	N	G											D 2000	
7.7	4.5	5.6	5.3	5.4	2.4	5.4	4.1	7.7										32.6	6

**SIGN DETAIL**  
1:35

**TRAILBLAZER FOR RAMPS**

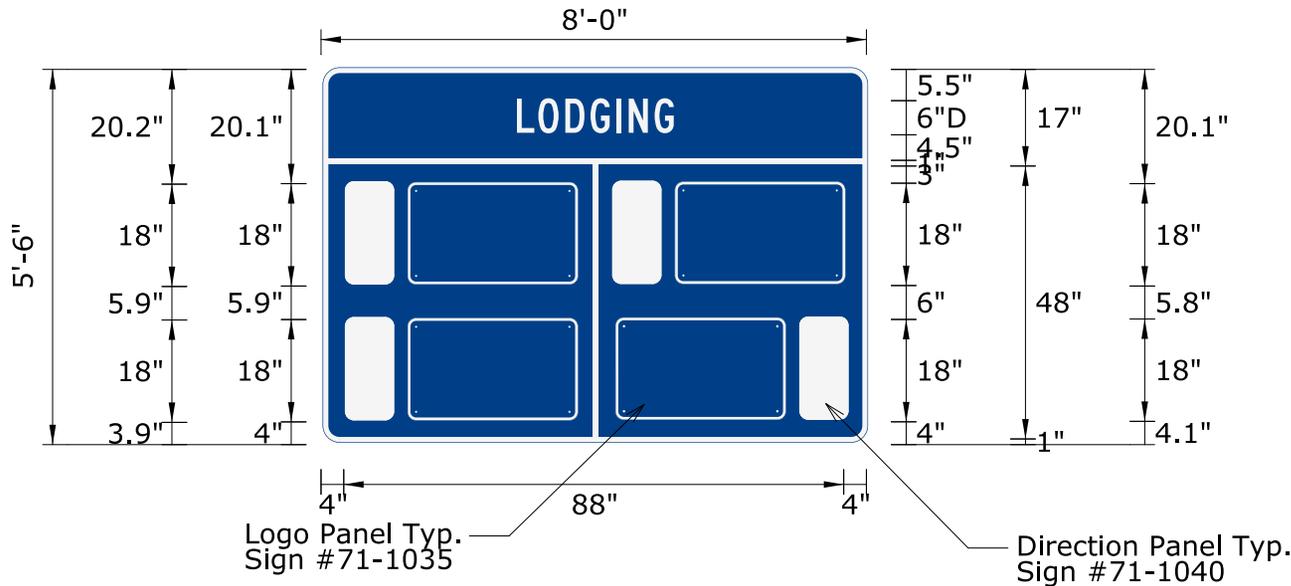

SIGN NUMBER	71-1045
PANEL SIZE	8'-0" x 5'-6"
SIGN AREA	44.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	4	27.9	8.5	18
Logo Panel	0	15	27.8	30	18
Direction Panel	0	51.1	28	8.5	18
Logo Panel	0	62	27.9	30	18
Direction Panel	0	4	4	8.5	18
Logo Panel	0	15	3.9	30	18
Logo Panel	0	51.5	4	30	18
Direction Panel	0	83.5	4.1	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON THE DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER FROM NEAREST TO FARTHEST:
  - A. THROUGH MOVEMENT: ON THE TOP OF THE SIGN FROM LEFT TO RIGHT, AND FROM TOP TO BOTTOM, STARTING IN THE LEFT CORNER. IF APPLICABLE, THE THIRD AND FOURTH THROUGH PANELS TO BE INSTALLED IN THE SECOND ROW FROM LEFT TO RIGHT.
  - B. LEFT TURN MOVEMENT: STARTING IN THE LEFT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE LEFT COLUMN, REMAINING LEFT PANELS TO BE INSTALLED IN THE RIGHT COLUMN BELOW THE THROUGH AND RIGHT PANELS.
  - C. RIGHT TURN MOVEMENT: STARTING IN THE RIGHT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE RIGHT COLUMN, REMAINING RIGHT PANELS TO BE INSTALLED IN THE LEFT COLUMN BELOW THE THROUGH AND LEFT PANELS.

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE : 71-1045

Jun 21, 2019


**LETTER POSITIONS (X)**

															LENGTH	SERIES/SIZE
	L	O	D	G	I	N	G									C 2000
34.2	3.8	4.7	4.4	4.6	2.2	4.6	3.4	34.2							27.6	6

# SIGN DETAIL

1:45

## TRAILBLAZER FOR RAMPS

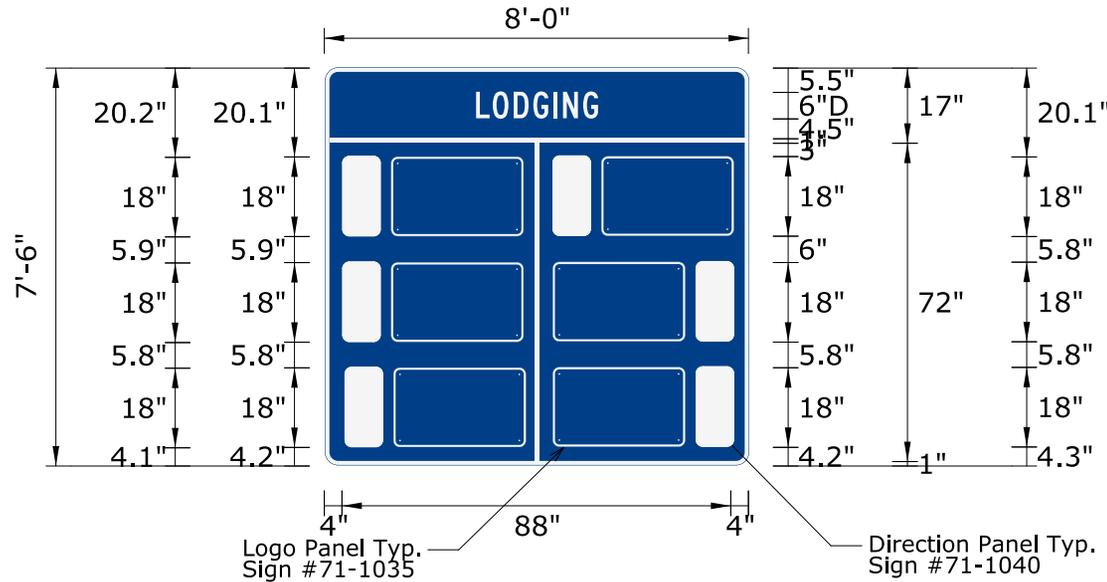

SIGN NUMBER	71-1046
PANEL SIZE	8'-0" x 7'-6"
SIGN AREA	60.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

### PANEL PLACEMENT ORDER:

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON THE DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER FROM NEAREST TO FARTHEST:

A. THROUGH MOVEMENT: ON THE TOP OF THE SIGN FROM LEFT TO RIGHT, AND FROM TOP TO BOTTOM, STARTING IN THE LEFT CORNER. IF APPLICABLE, THE THIRD AND FOURTH THROUGH PANELS TO BE INSTALLED IN THE SECOND ROW FROM LEFT TO RIGHT. IF APPLICABLE, THE FIFTH AND SIXTH THROUGH PANELS TO BE INSTALLED IN THE THIRD ROW FROM LEFT TO RIGHT.

B. LEFT TURN MOVEMENT: STARTING IN THE LEFT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE LEFT COLUMN, REMAINING LEFT PANELS TO BE INSTALLED IN THE RIGHT COLUMN BELOW THE THROUGH AND RIGHT PANELS.

C. RIGHT TURN MOVEMENT: STARTING IN THE RIGHT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE RIGHT COLUMN, REMAINING RIGHT PANELS TO BE INSTALLED IN THE LEFT COLUMN BELOW THE THROUGH AND LEFT PANELS.

Dimensions are in Inches

Material : .125 Thick Sheet Aluminum

Mounted : Ground

Division of Traffic Engineering

FILE :71-1046


Jun 21, 2019

### LETTER POSITIONS (X)

LETTER POSITIONS (X)															LENGTH	SERIES/SIZE		
	L	O	D	G	I	N	G										C 2000	
34.2	3.8	4.7	4.4	4.6	2.2	4.6	3.4	34.2									27.6	6

**SIGN DETAIL**  
1:35

**TRAILBLAZER FOR RAMPS**

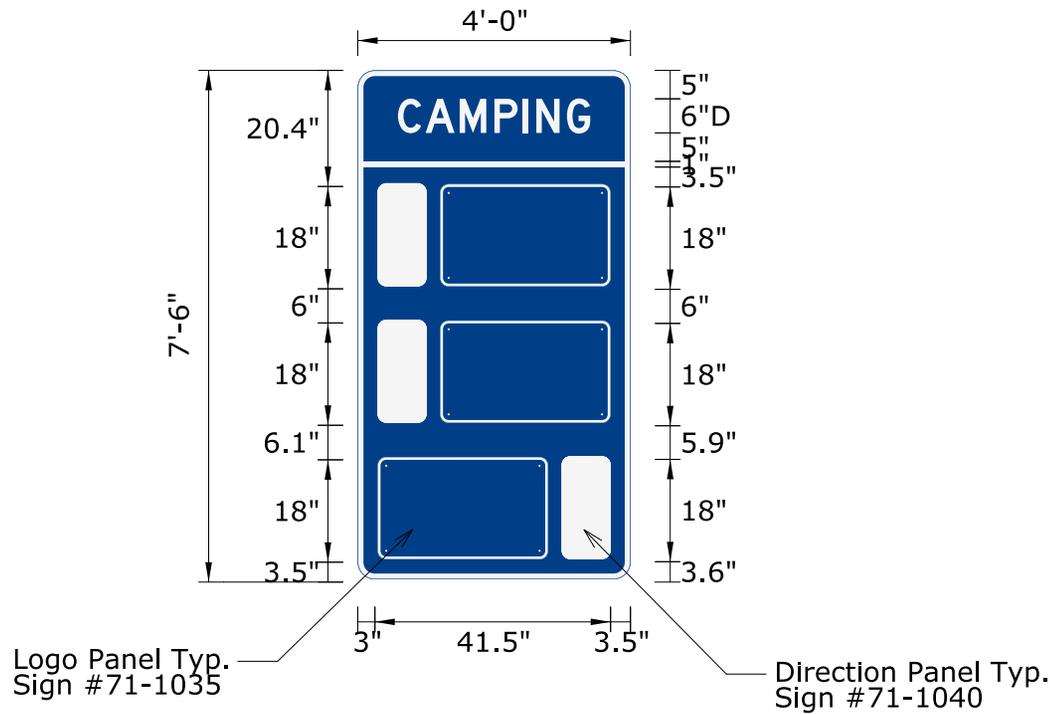

SIGN NUMBER	71-1047
PANEL SIZE	4'-0" x 7'-6"
SIGN AREA	30.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	3.5	51.6	8.5	18
Logo Panel	0	14.5	51.5	30	18
Direction Panel	0	3	27.6	8.5	18
Logo Panel	0	14.5	27.5	30	18
Logo Panel	0	4	3.5	30	18
Direction Panel	0	36	3.6	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER:
  - A. THROUGH (FROM NEAREST TO FARTHEST)
  - B. LEFT (FROM NEAREST TO FARTHEST)
  - C. RIGHT (FROM NEAREST TO FARTHEST)

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Mounted : Ground  
 Division of Traffic Engineering

FILE :71-1047


Jun 20, 2019

**LETTER POSITIONS (X)**

LETTER POSITIONS (X)																			LENGTH	SERIES/SIZE
	C	A	M	P	I	N	G												D 2000	
7.1	4.9	6	6.1	5	2.4	5.4	4.1	7.1											33.8	6

**SIGN DETAIL**  
1:35

**TRAILBLAZER FOR RAMPS**

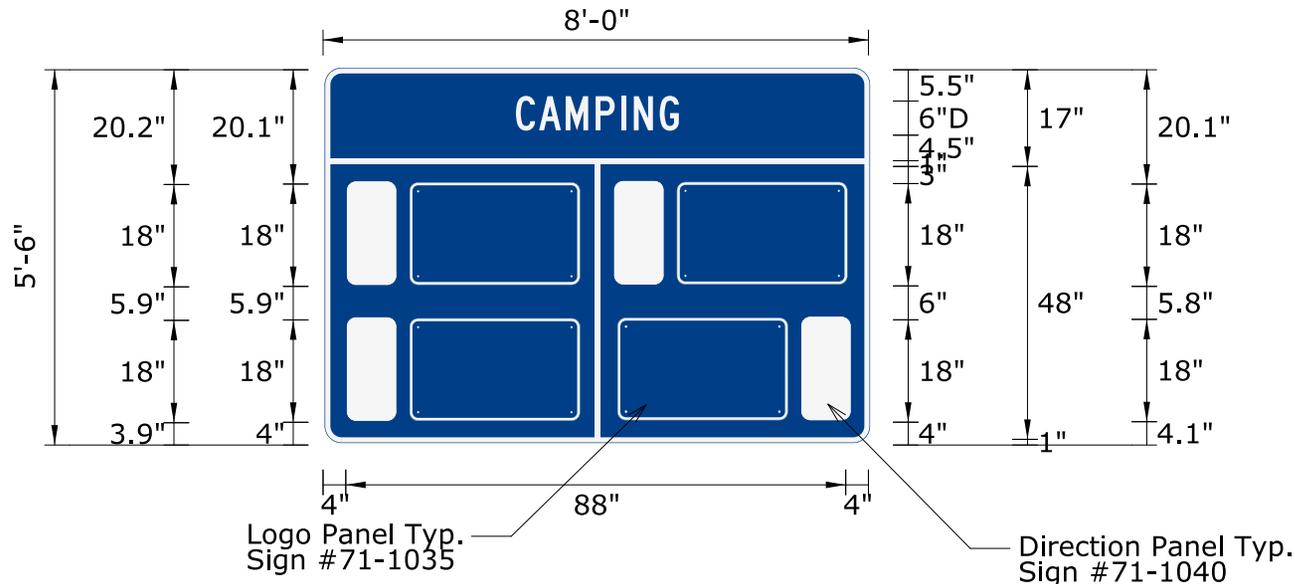

SIGN NUMBER	71-1048
PANEL SIZE	8'-0" x 5'-6"
SIGN AREA	44.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: * COLOR: Blue
LEGEND/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
Direction Panel	0	4	27.9	8.5	18
Logo Panel	0	15	27.8	30	18
Direction Panel	0	51.1	28	8.5	18
Logo Panel	0	62	27.9	30	18
Direction Panel	0	4	4	8.5	18
Logo Panel	0	15	3.9	30	18
Logo Panel	0	51.5	4	30	18
Direction Panel	0	83.5	4.1	8.5	18

**PANEL PLACEMENT ORDER:**

1. DIRECTIONAL PANELS FOR THROUGH AND LEFT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE LEFT OF THE LOGO PANELS (SIGN # 71-1035).
2. DIRECTIONAL PANELS FOR RIGHT TURN MOVEMENTS (SIGN #71-1040) SHALL BE INSTALLED TO THE RIGHT OF THE LOGO PANELS (SIGN # 71-1035).
3. LOGO PANELS (SIGN # 71-1035) SHALL BE INSTALLED BASED ON THE DIRECTION OF TRAVEL AND DISTANCE TO THE DESTINATION IN THE FOLLOWING ORDER FROM NEAREST TO FARTHEST:
  - A. THROUGH MOVEMENT: ON THE TOP OF THE SIGN FROM LEFT TO RIGHT, AND FROM TOP TO BOTTOM, STARTING IN THE LEFT CORNER. IF APPLICABLE, THE THIRD AND FOURTH THROUGH PANELS TO BE INSTALLED IN THE SECOND ROW FROM LEFT TO RIGHT.
  - B. LEFT TURN MOVEMENT: STARTING IN THE LEFT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE LEFT COLUMN, REMAINING LEFT PANELS TO BE INSTALLED IN THE RIGHT COLUMN BELOW THE THROUGH AND RIGHT PANELS.
  - C. RIGHT TURN MOVEMENT: STARTING IN THE RIGHT COLUMN BELOW THE THROUGH PANELS, FROM TOP TO BOTTOM. IF NOT ENOUGH SPACE IS AVAILABLE IN THE RIGHT COLUMN, REMAINING RIGHT PANELS TO BE INSTALLED IN THE LEFT COLUMN BELOW THE THROUGH AND LEFT PANELS.

Dimensions are in Inches  
Material : .125 Thick Sheet Aluminum  
Mounted : Ground  
Division of Traffic Engineering

FILE : 71-1048

Jun 21, 2019

**LETTER POSITIONS (X)**


													LENGTH	SERIES/SIZE		
	C	A	M	P	I	N	G								C 2000	
33.7	4.1	4.7	5.3	4.6	2.2	4.6	3.4	33.7							28.7	6



# SIGN DETAIL

1:25

## TRAILBLAZER FOR RAMP

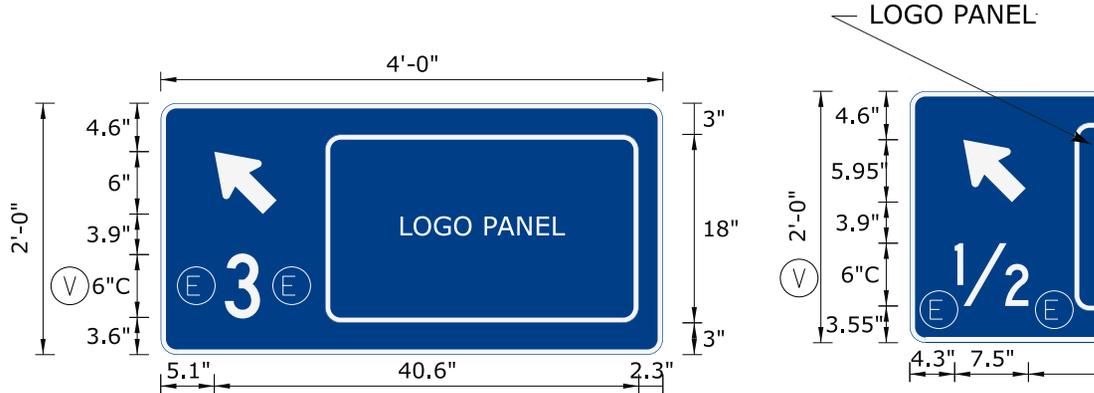

SIGN NUMBER	71-1050
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX
	COLOR: Blue
ARROW/BORDER	TYPE: IX
	COLOR: White/White

FILE :71-1050

6/24/2020

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	45	4	14.2	5	7.5
Logo Panel	0	15.7	3	30	18

### LOGO DETAIL NOTES :

- SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
- ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
- SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
- LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
- VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
- SYMBOL OR TRADEMARK AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
- ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A 1/2" WHITE BORDER WITH 1.5" CORNER RADIUS.

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

(E) EQUAL SPACING FOR NUMBERS (DISTANCE).

(V) VARIABLE NUMBER (DISTANCE).

Dimensions are in Inches

Material : .100 Thick Sheet Aluminum


Ground Mounted

Division of Traffic Engineering

# SIGN DETAIL

1:25

## TRAILBLAZER FOR CONVENTIONAL ROADS

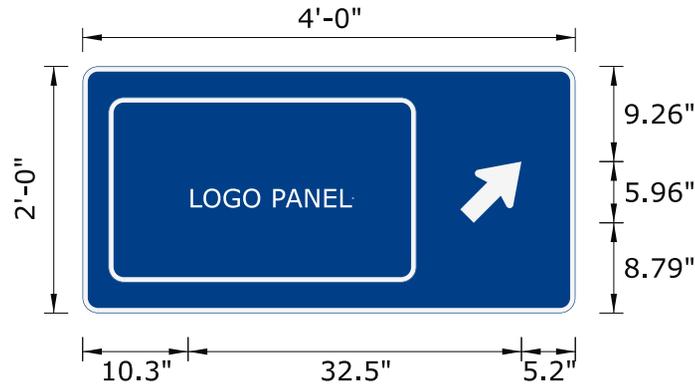

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

### LOGO DETAIL NOTES :

1. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
4. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
5. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
6. SYMBOL OR TRADEMARK AND A  $\frac{5}{64}$ " WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
7. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{1}{2}$ " WHITE BORDER WITH 1.5" CORNER RADIUS.

Dimensions are in Inches  
Material : .100 Thick Sheet Aluminum  
Ground Mounted  
Division of Traffic Engineering

SIGN NUMBER	71-1051
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX COLOR: Blue
ARROW/BORDER	TYPE: IX COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
AR_Type D	45	36.8	8.8	6	6
Logo Panel	0	2.5	3	30	18


FILE : 72-1051

6/25/2020

# SIGN DETAIL

1:25

## TRAILBLAZER FOR CONVENTIONAL ROADS

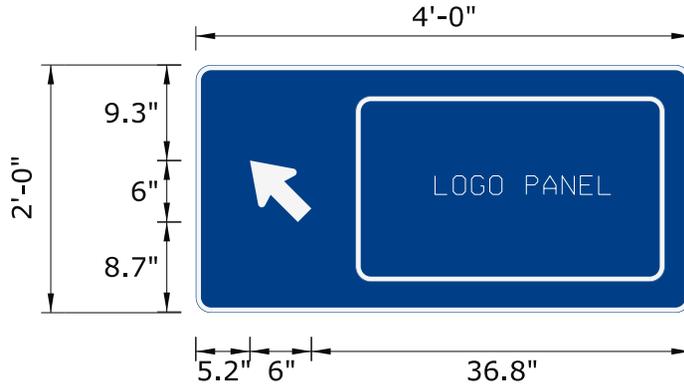

### MINIMUM LETTER AND NUMERAL SIZES FOR LOGO PANEL

APPLICATION	SIZE IN INCHES
Words and Numerals (Non-Trademark / Graphic Logo)	4
Trademark / Graphic Logo	Proportional
Supplemental Message Words And Numerals	2.5

### LOGO DETAIL NOTES :

1. SEE TABLE BELOW FOR MINIMUM LETTER AND NUMERAL SIZES.
2. ALL LEGENDS, SYMBOLS AND TRADEMARKS SHALL BE CENTERED.
3. SPACING BETWEEN ADJACENT LETTERS SHALL NOT BE LESS THAN DOUBLE STROKE WIDTH, WHEN NO SYMBOL OR TRADEMARK IS USED.
4. LATERAL SPACING TO THE OUTSIDE EDGE OF THE VERTICAL BORDERS AND BETWEEN ADJACENT WORDS ON A LINE OF COPY SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER IN THAT LINE.
5. VERTICAL SPACING TO THE OUTSIDE EDGE OF THE HORIZONTAL BORDERS AND INTERLINE SPACING SHALL NOT BE LESS THAN HALF THE VERTICAL DIMENSION OF THE LARGEST LETTER ON THE ADJACENT LINE.
6. SYMBOL OR TRADEMARK AND A  $\frac{59}{64}$ " WHITE BORDER WITH 1.5" CORNER RADIUS SHALL BE CONTAINED WITHIN THE SPECIFIED RECTANGULAR AREA.
7. ALL SIGN PANELS NOT DISPLAYING A SYMBOL OR TRADEMARK SHOULD HAVE BLUE BACKGROUND WITH A WHITE LEGEND AND A  $\frac{1}{2}$ " WHITE BORDER WITH 1.5" CORNER RADIUS.

Dimensions are in Inches  
 Material : .100 Thick Sheet Aluminum  
 Ground Mounted  
 Division of Traffic Engineering

SIGN NUMBER	71-1052
PANEL SIZE	4'-0" x 2'-0"
SIGN AREA	8.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	1.5"
BACKGROUND	TYPE: IX
	COLOR: Blue
ARROW/BORDER	TYPE: IX
	COLOR: White/White

SYMBOL	ROT	X	Y	WID	HT
Logo Panel	0	2.5	3	30	18
AR_Type D	45	36.8	8.8	6	6

FILE : 72-1052

6/25/2020















# SIGN DETAIL

1:8

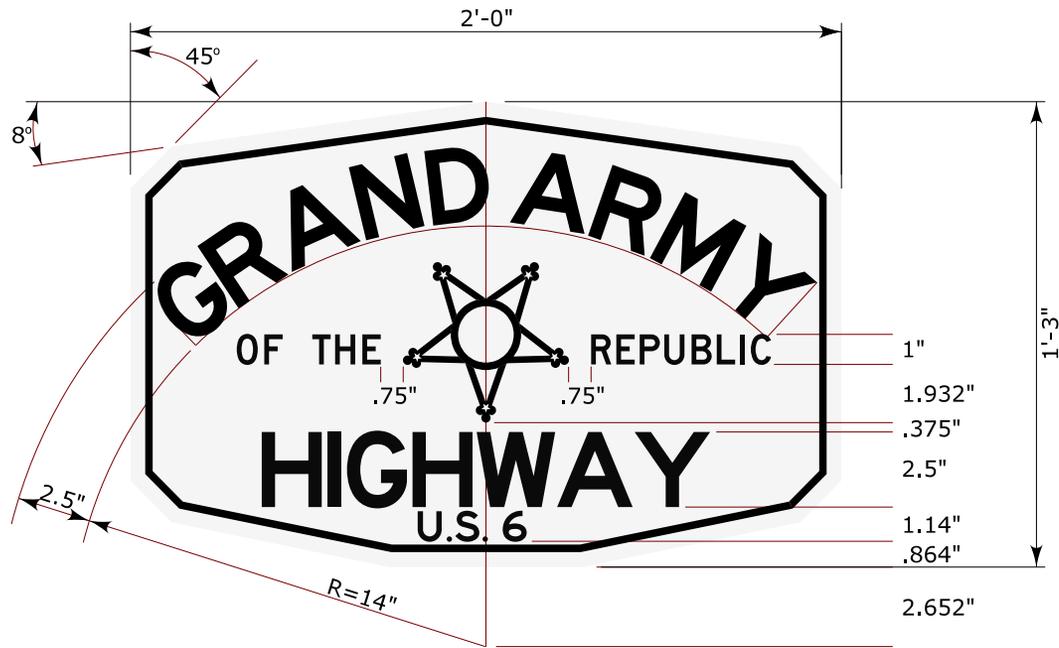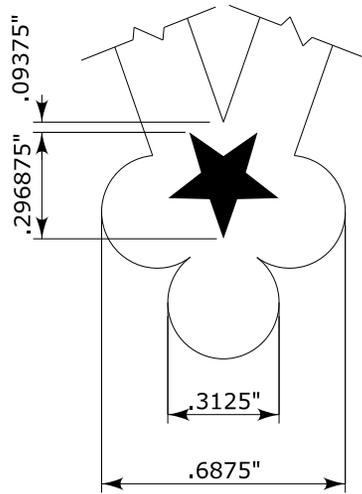

SIGN NUMBER	71-6509
PANEL SIZE	2'-0" x 1'-4"
SIGN AREA	2.6 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0.5" / 0.25"
CORNER RADIUS	0"
BACKGROUND	TYPE: *
	COLOR: White
LEGEND/BORDER	TYPE: *
	COLOR: /Black
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT

## REV'D 12/18

Change sign # from 51-6509 to 71-6509.

FILE :71-6509

Dec 19, 2018


Dimensions are in Inches

Material : .080 Thick Sheet Aluminum

Engineer : B. Schilling / Designed By: J. Fascione / Checked By: \_\_\_\_\_

Ground Mounted

LETTER POSITIONS (X)										LENGTH	SERIES/ SIZE
G	R	A	N	D		A	R	M	Y		E 2000
2	2	2.6	2	2		2.6	2	2.4	2.6	21.3	2.5
O	F	T	H	E							D 2000
0.7	0.6	0.6	0.7	0.6						4.9	1
R	E	P	U	B	L	I	C				D 2000
0.7	0.6	0.7	0.7	0.7	0.6	0.2	0.7			6.1	1
H	I	G	H	W	A	Y					E 2000
2	0.4	2	2	2.6	2.5	2.5				15.1	2.5
U	.	S	.	6							E 2000
0.8	0.2	0.8	0.2	0.8						3.7	1

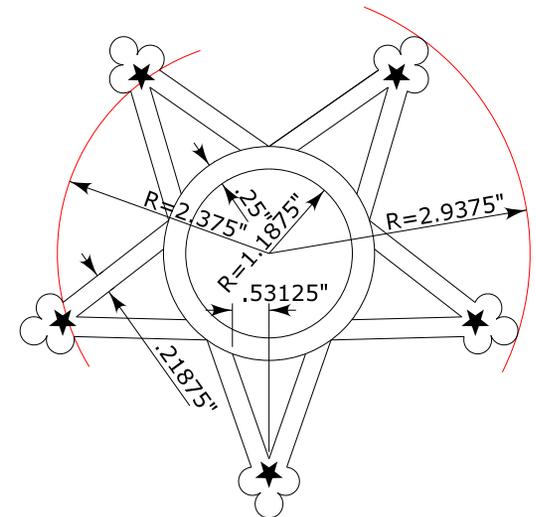








# SIGN DETAIL

1:40

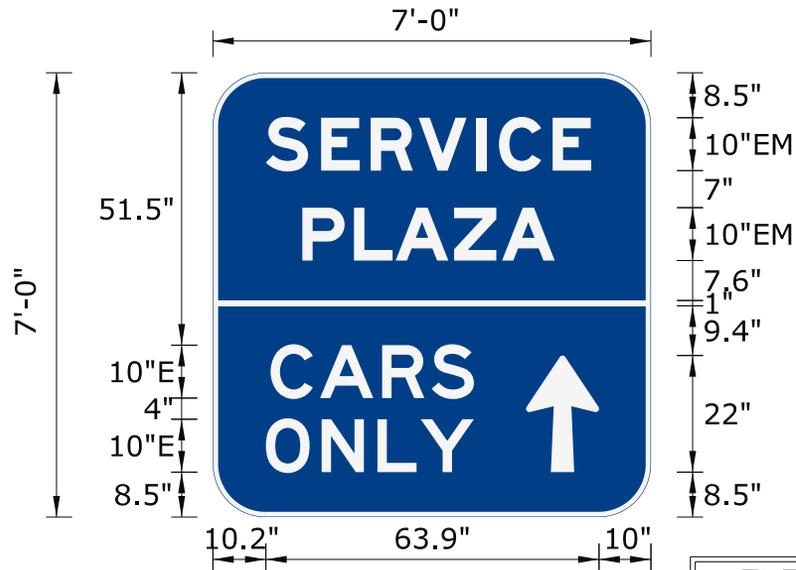

Dimensions are in Inches

Material : .125 Thick Sheet Aluminum

Engineer : B. Schilling / Designed By: J. Fascione / Checked By: \_\_\_\_\_

Ground Mounted

REV'D /

SIGN NUMBER	71-6765
PANEL SIZE	7'-0" x 7'-0"
SIGN AREA	49.0 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	10"
BACKGROUND	TYPE: *
	COLOR: Blue
LEGEND/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
AR_Type A	360	60.1	8.5	14	22


FILE : 71-6765

Jan 04, 2019

LETTER POSITIONS (X)																LENGTH	SERIES/SIZE
S	E	R	V	I	C	E										EM 2000	
8.1	7.4	8.1	9.2	2	8.1	7.4										62.4	10
P	L	A	Z	A												EM 2000	
8.1	7.4	10.1	8.1	10.1												48.4	10
C	A	R	S													E 2000	
8.1	10.2	8.1	8.1													39	10
O	N	L	Y													E 2000	
8.4	8.1	7.5	10.2													39.9	10

# SIGN DETAIL

1:50

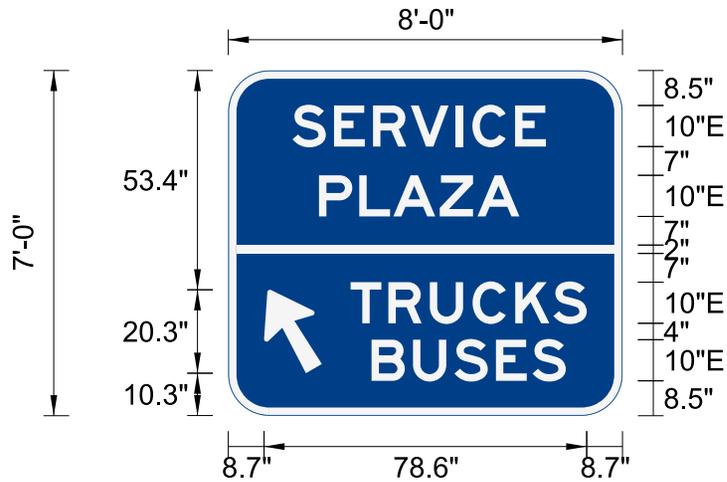

Dimension are in Inches

Material : .125 Thick Sheet Aluminum

Sign Support No. N/A

Location : N/A

Engineer : BAS Designed By: JMF Checked By: BBR

Ground Mounted

**REV'D 7/15**  
 Re-Numbered from 51-6768  
 (duplicate numbers)

SIGN NUMBER	71-6766
PANEL SIZE	8'-0" x 7'-0"
TOTAL (Sq.ft.)	56.0 Sq.Ft.
DATE	May 21, 2015
BDR INSET/WIDTH	0" / 2"
CORNER RADIUS	10"
BACKGROUND	TYPE: *
	COLOR: Blue
LEGEND/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	


SYMBOL	ROT	X	Y	WID	HT
AR_Type A	30	8.7	10.4	14	22

FILE :71-6766

LETTER POSITIONS (X)															LENGTH	SERIES/SIZE
	S	E	R	V	I	C	E									E 2000
15.7	10.1	9.5	9.2	10.9	4.1	10.4	7.5	18.7							61.7	10
	P	L	A	Z	A											E 2000
22.1	9.8	8.3	11.3	9.2	10.2	25.1									48.8	10
	T	R	U	C	K	S										E 2000
29.8	9.2	10.1	10.4	10.4	9.3	8.1	8.7								57.5	10
	B	U	S	E	S											E 2000
34.9	10.1	10.1	10.1	8.9	8.1	13.8									47.3	10

# SIGN DETAIL

1:40

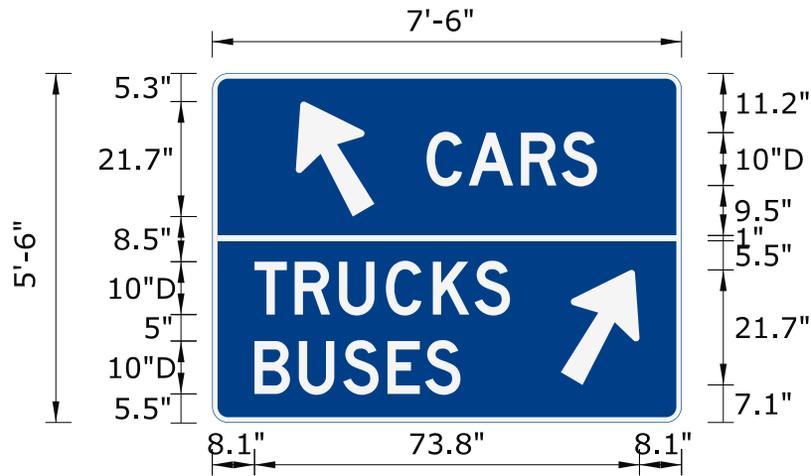

SIGN NUMBER	71-6945
PANEL SIZE	7'-6" x 5'-6"
SIGN AREA	41.3 Sq.Ft.
MUTCD	
BDR INSET/WIDTH	0" / 1"
CORNER RADIUS	3"
BACKGROUND	TYPE: *
	COLOR: Blue
LEGEND/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

SYMBOL	ROT	X	Y	WID	HT
AR_Type A	30	16	38.9	15	23.6
AR_Type A	330	66.9	7.1	15	23.6

Dimensions are in Inches  
 Material : .125 Thick Sheet Aluminum  
 Engineer : B. Schilling / Designed By: J. Fascione / Checked By: \_\_\_\_\_  
 Ground Mounted

REV'D /

FILE : 71-6945

Jan 04, 2019

LETTER POSITIONS (X)															LENGTH	SERIES/SIZE
C	A	R	S													D 2000
6.8	8.5	6.8	6.8												32.7	10
T	R	U	C	K	S											D 2000
6.2	6.8	6.8	6.8	7	6.8										49	10
B	U	S	E	S												D 2000
6.8	6.8	6.8	6.2	6.8											39.5	10















PAGE 2 of 2  
FULL SCALE  
9" x 9"  
11" x 17" SHT.


















CONNECTICUT  
GROWN



SIGN DETAIL

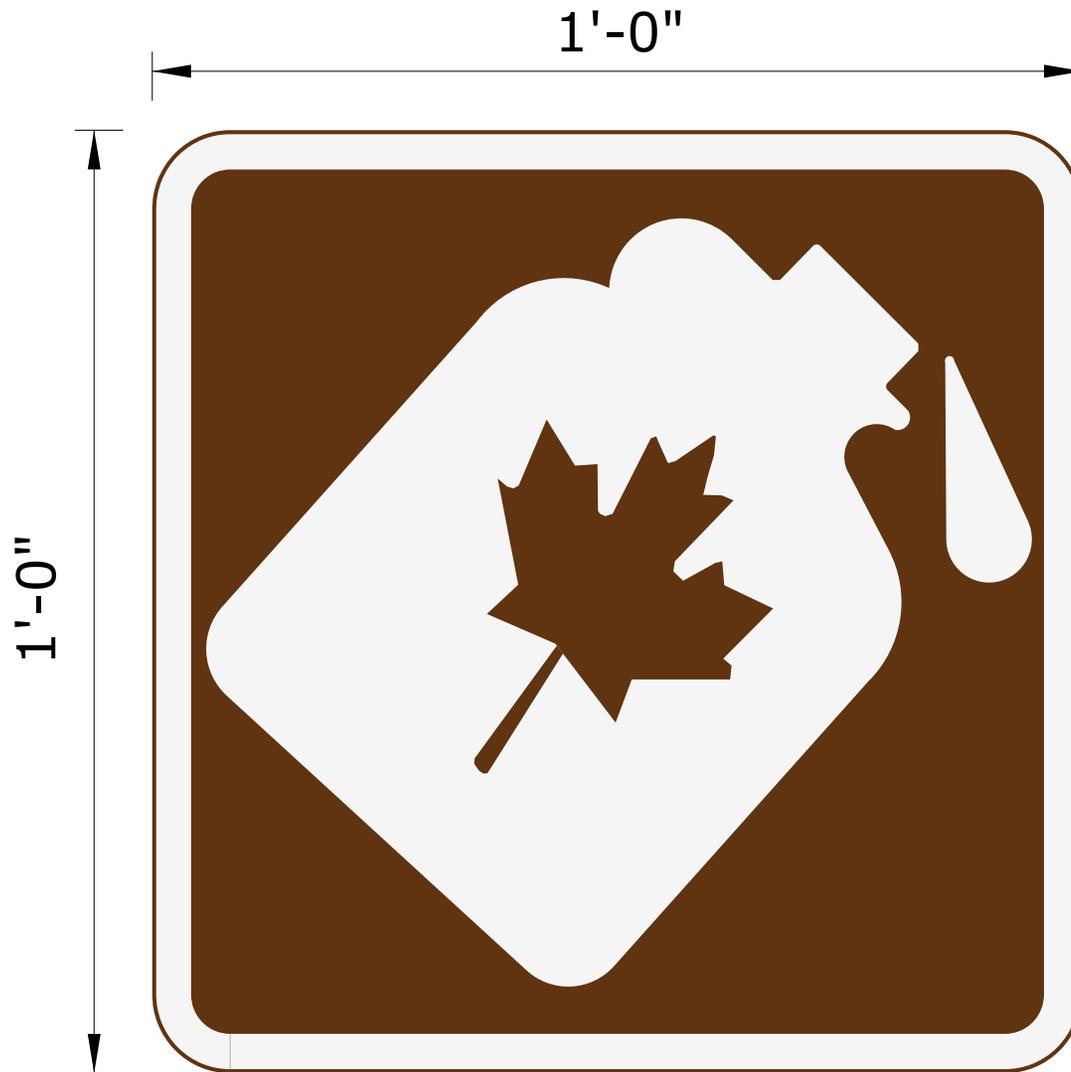

SIGN NUMBER	71-7902
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: *
	COLOR: Brown
SYMBOL/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7902 to 71-7902.

PLOTTED : 12/14/2018

See 2nd page for full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

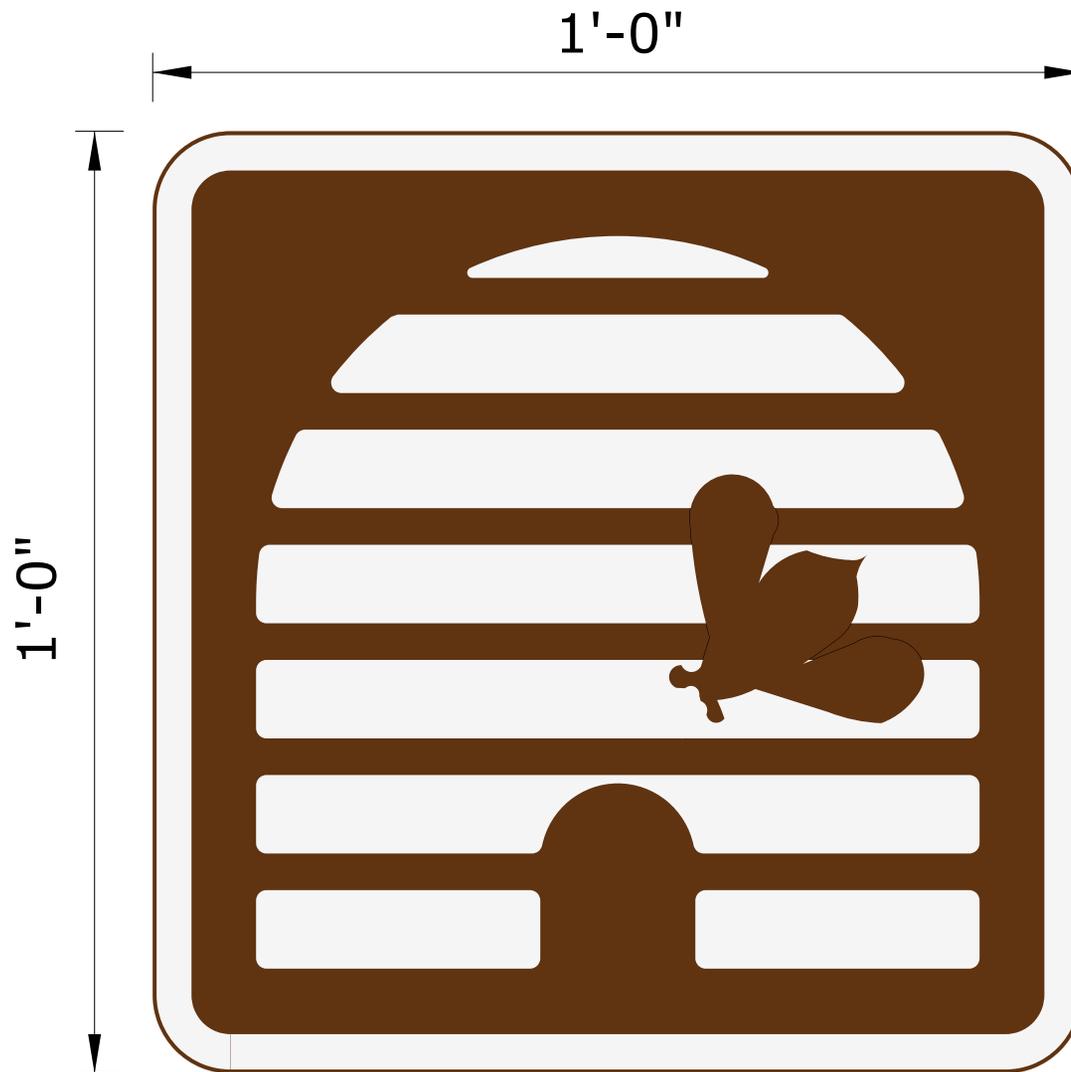

SIGN NUMBER	71-7903
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: *
	COLOR: Brown
SYMBOL/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7903 to 71-7903.

PLOTTED : 12/15/18

See 2nd page for full scale detail

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

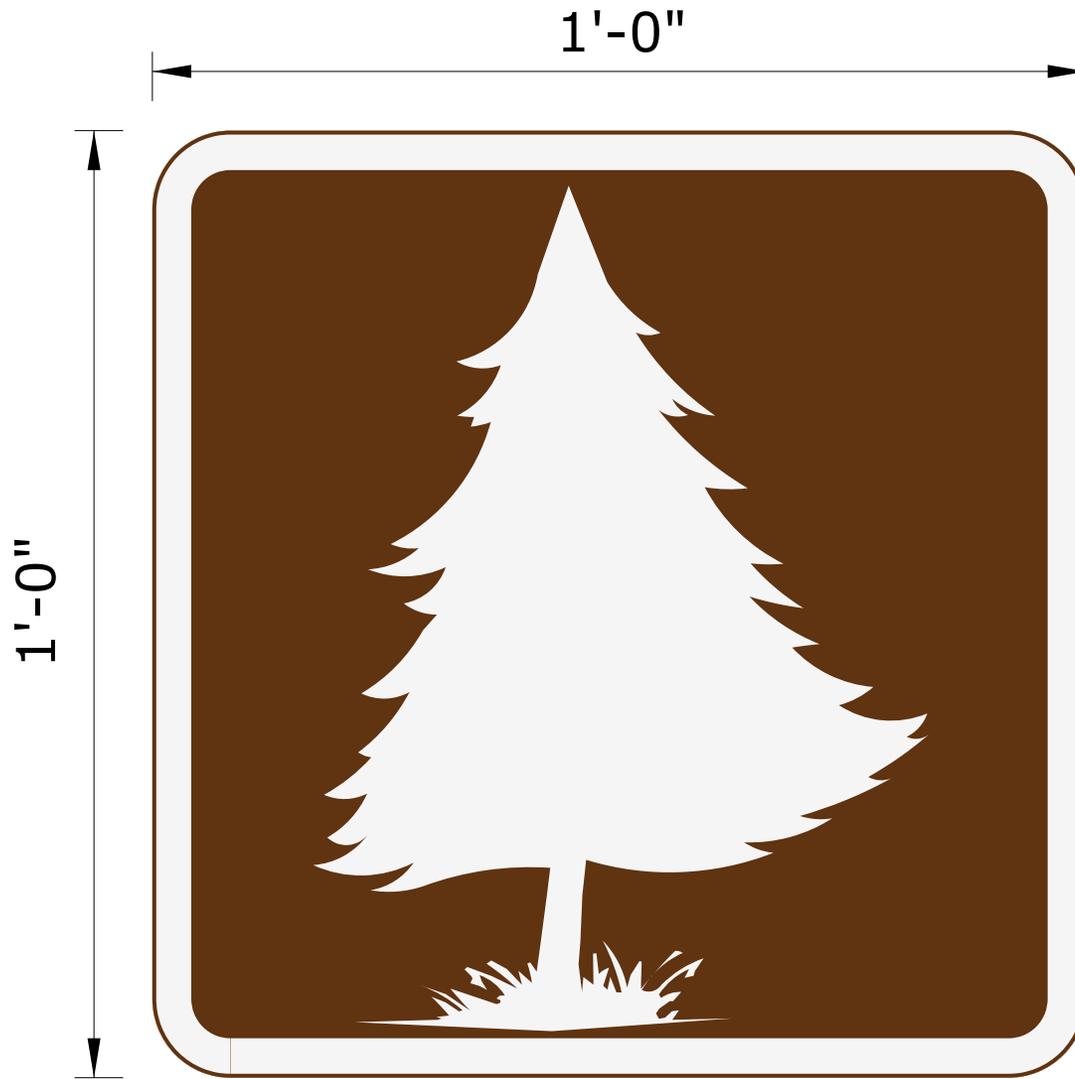

SIGN NUMBER	71-7904
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Sign # changed from 51-7904 to 71-7904.


PLOTTED : 12/15/18

See 2nd page for full scale detail

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

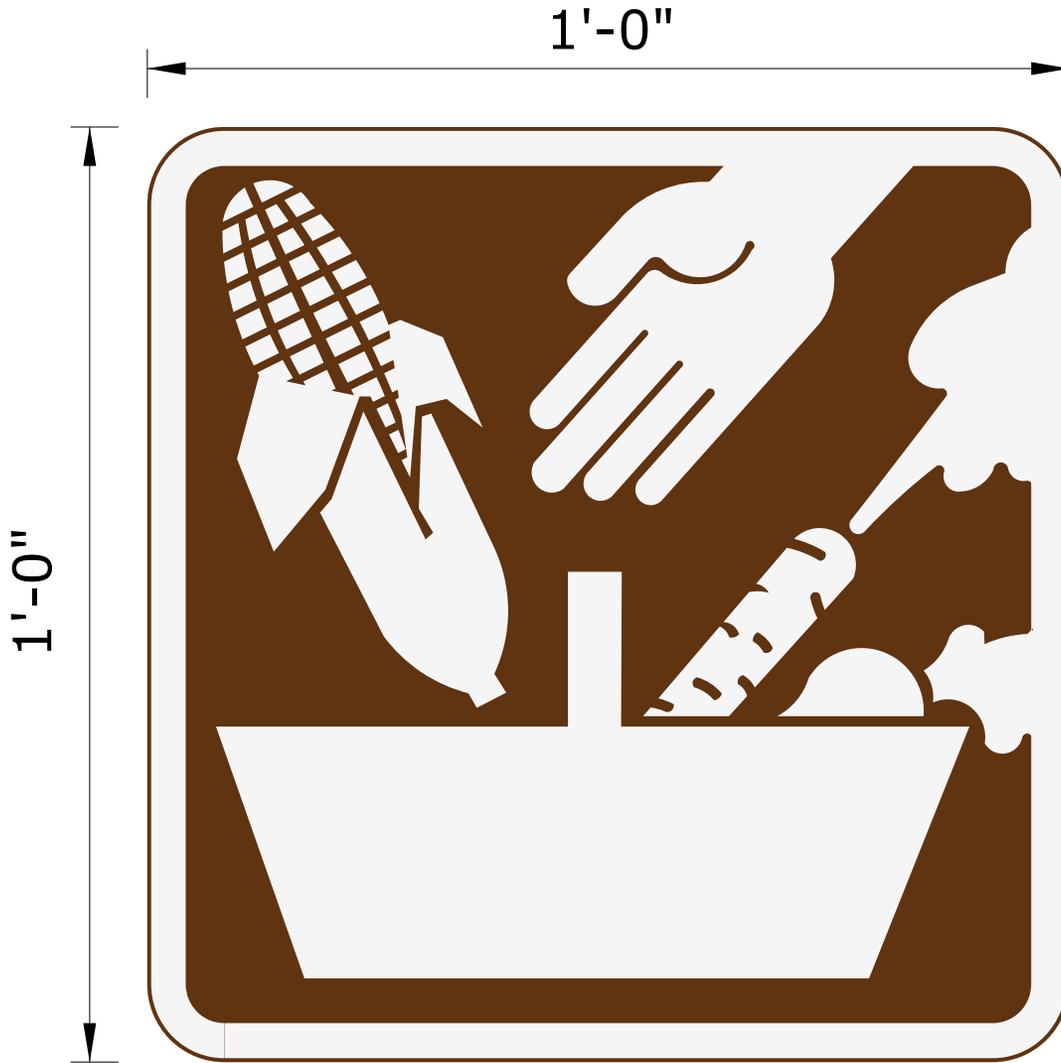

SIGN NUMBER	71-7905
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**

Changed sign # from 51-7905 to 71-7905.


PLOTTED : 12/15/2018

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

See 2nd page for Full scale detail.



SIGN DETAIL

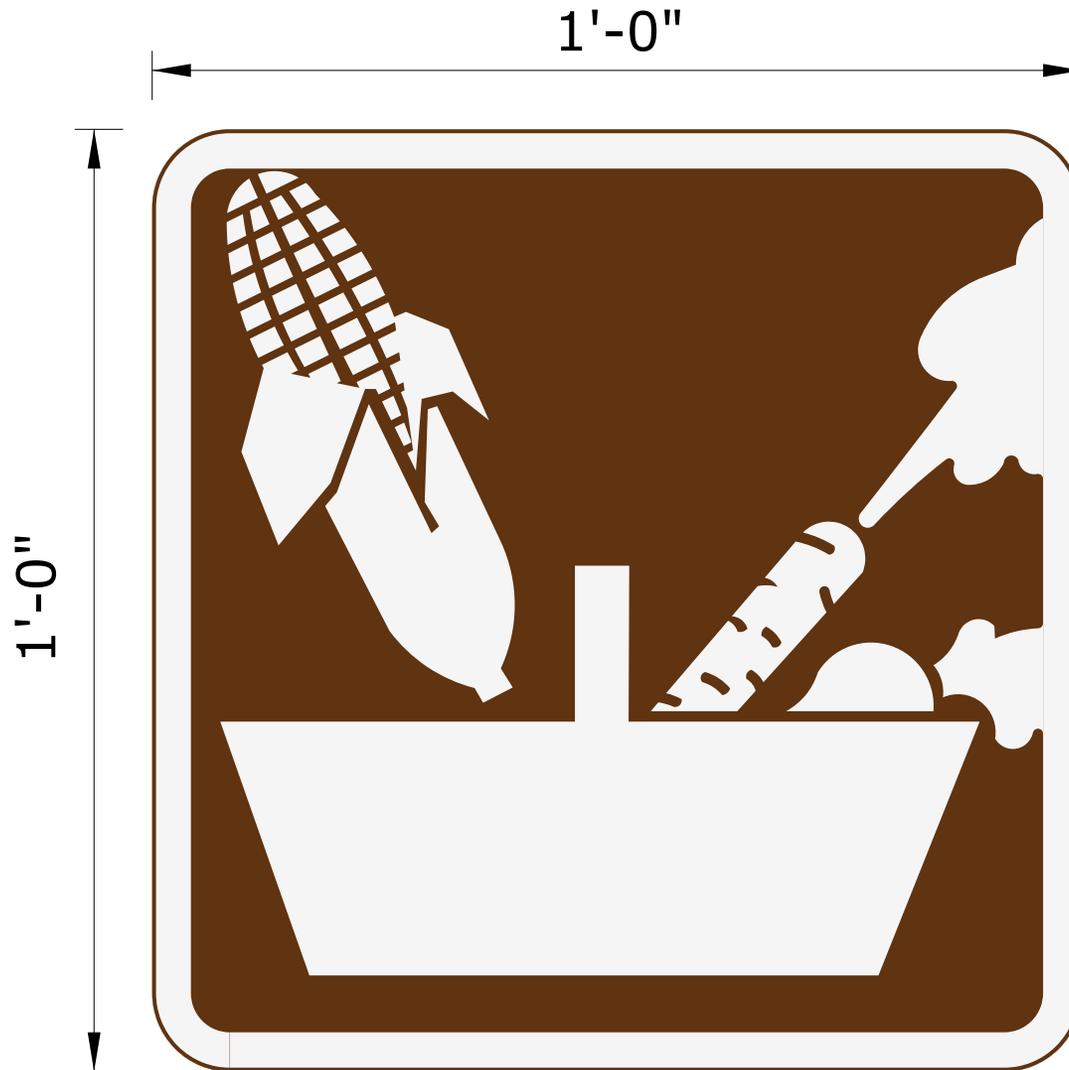

SIGN NUMBER	71-7906
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7906 to 71-7906.	

PLOTTED : 12/15/2018

See 2nd page for Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

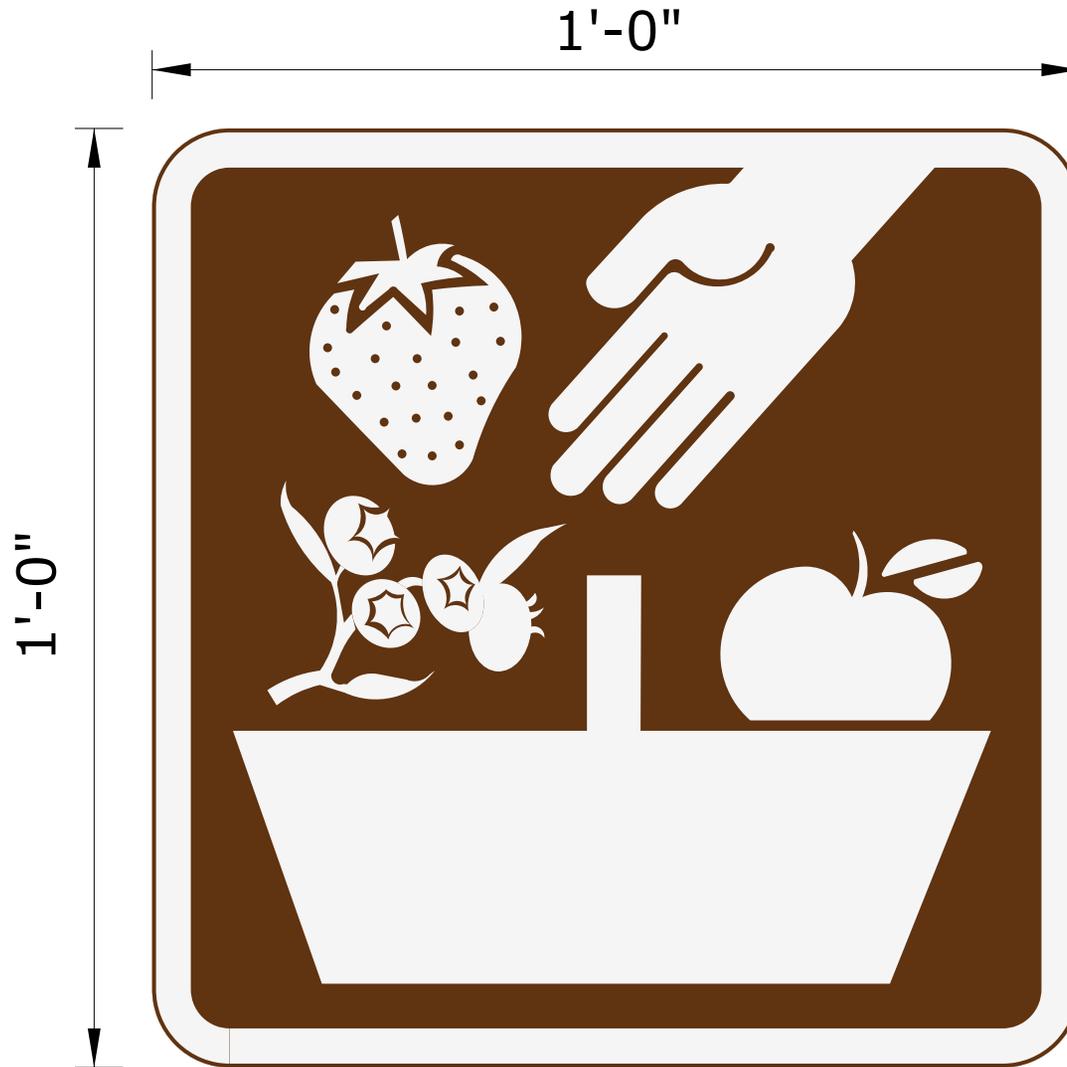

SIGN NUMBER	71-7907
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7907 to 71-7907.	

PLOTTED : 12/17/2018

See 2nd page for Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

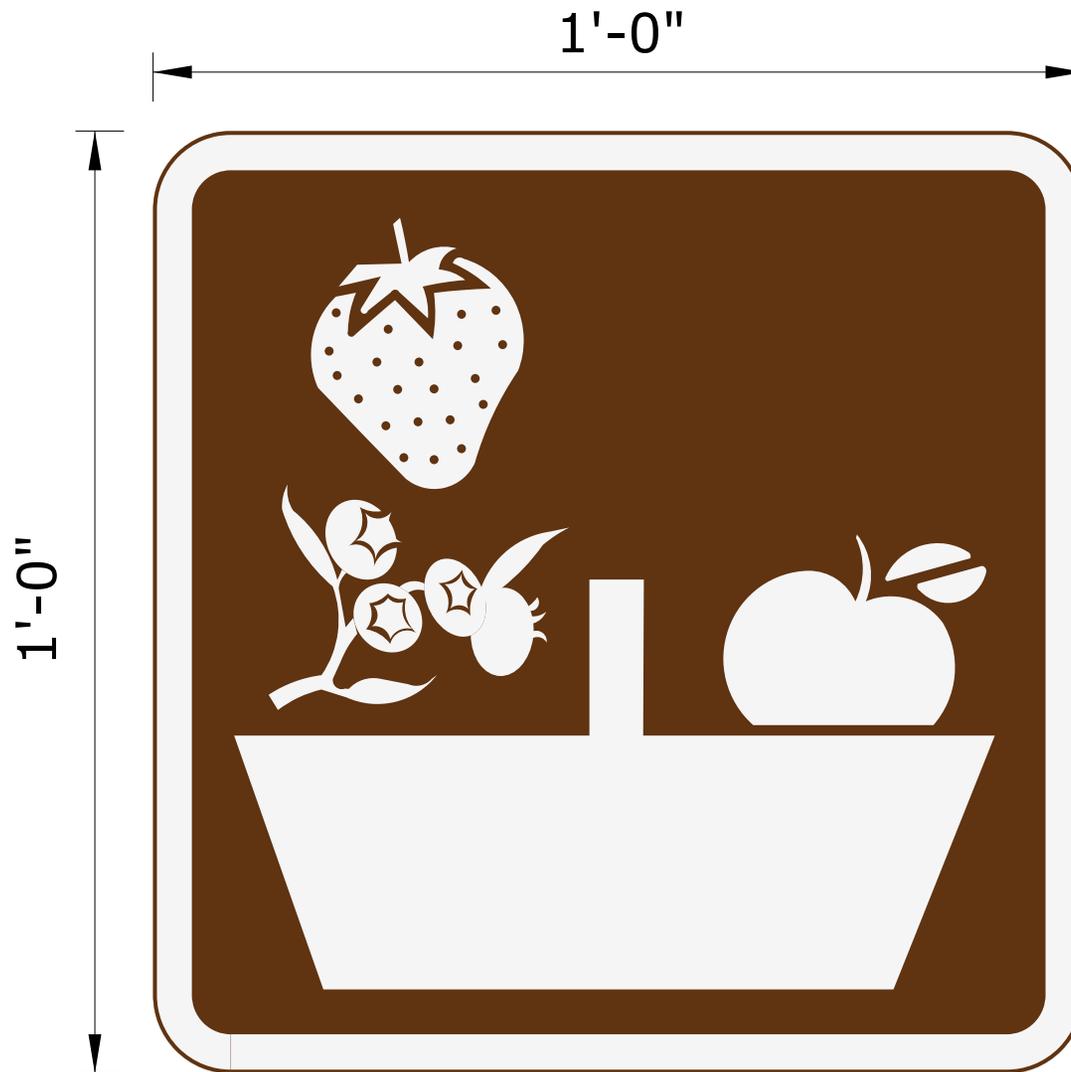

SIGN NUMBER	71-7908
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7908 to 71-7908.	

PLOTTED : 12/17/2018

See 2nd page for Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

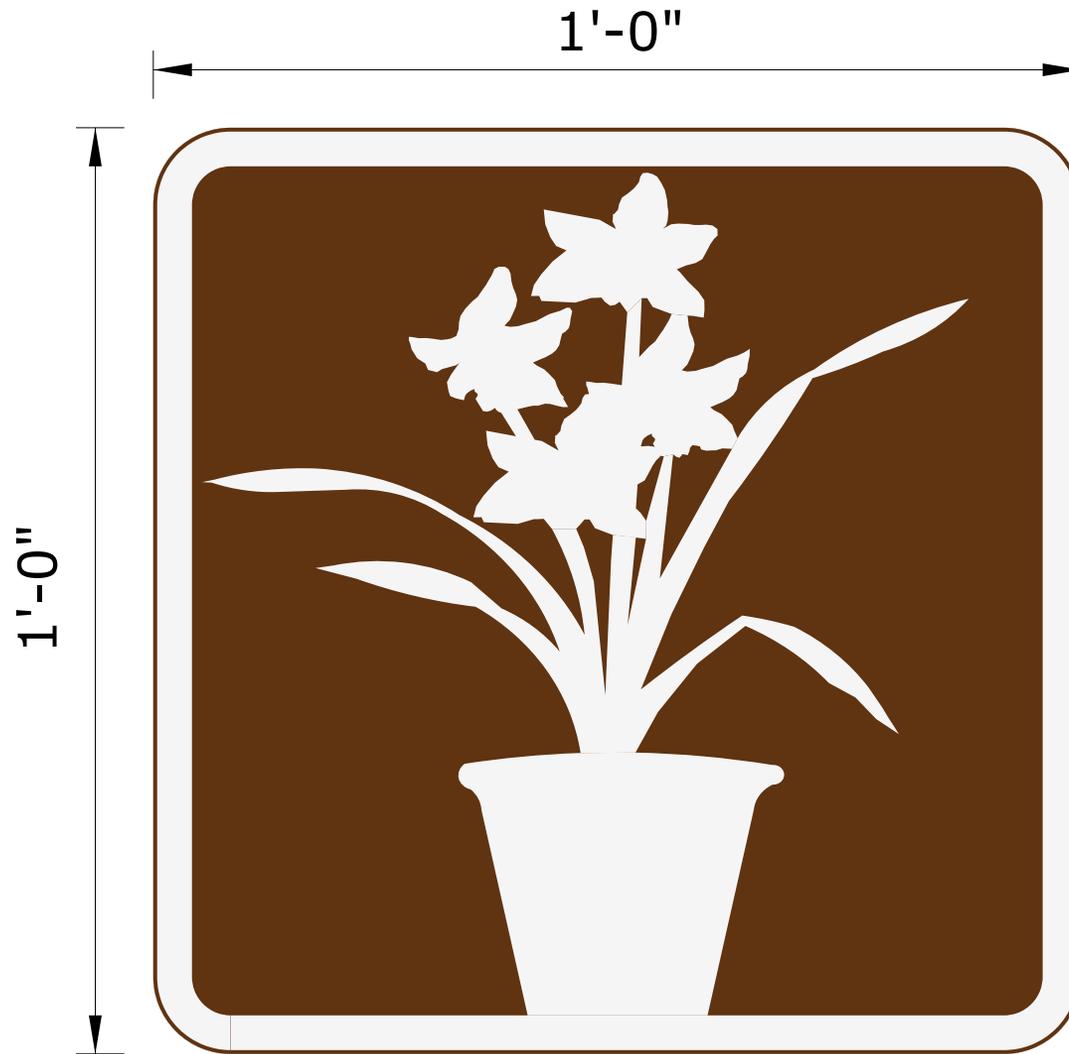

SIGN NUMBER	71-7909
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7909 to 71-7909.


PLOTTED : 12/17/2018

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

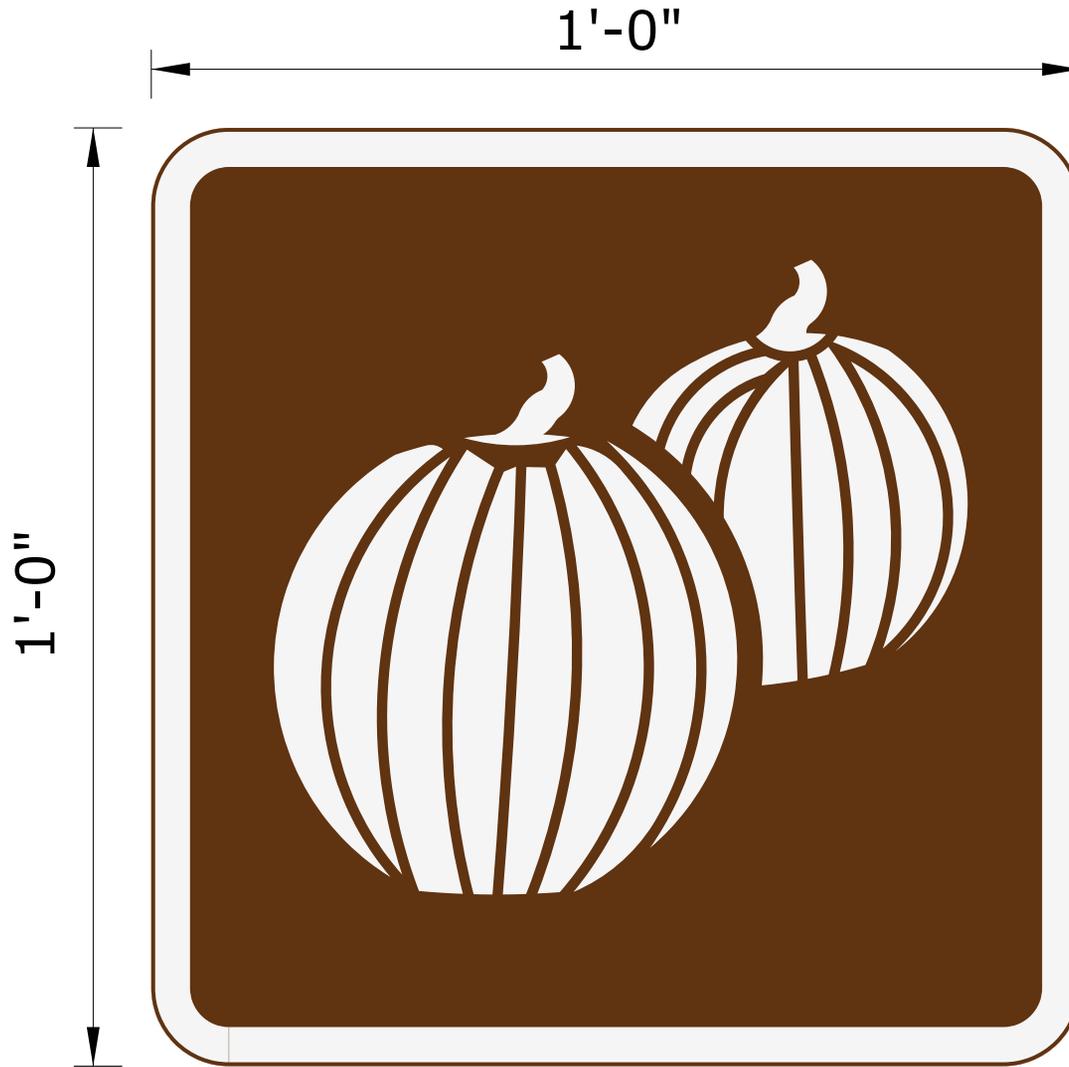

SIGN NUMBER	71-7910
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7910 to 71-7910.


PLOTTED : 12/17/2018

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

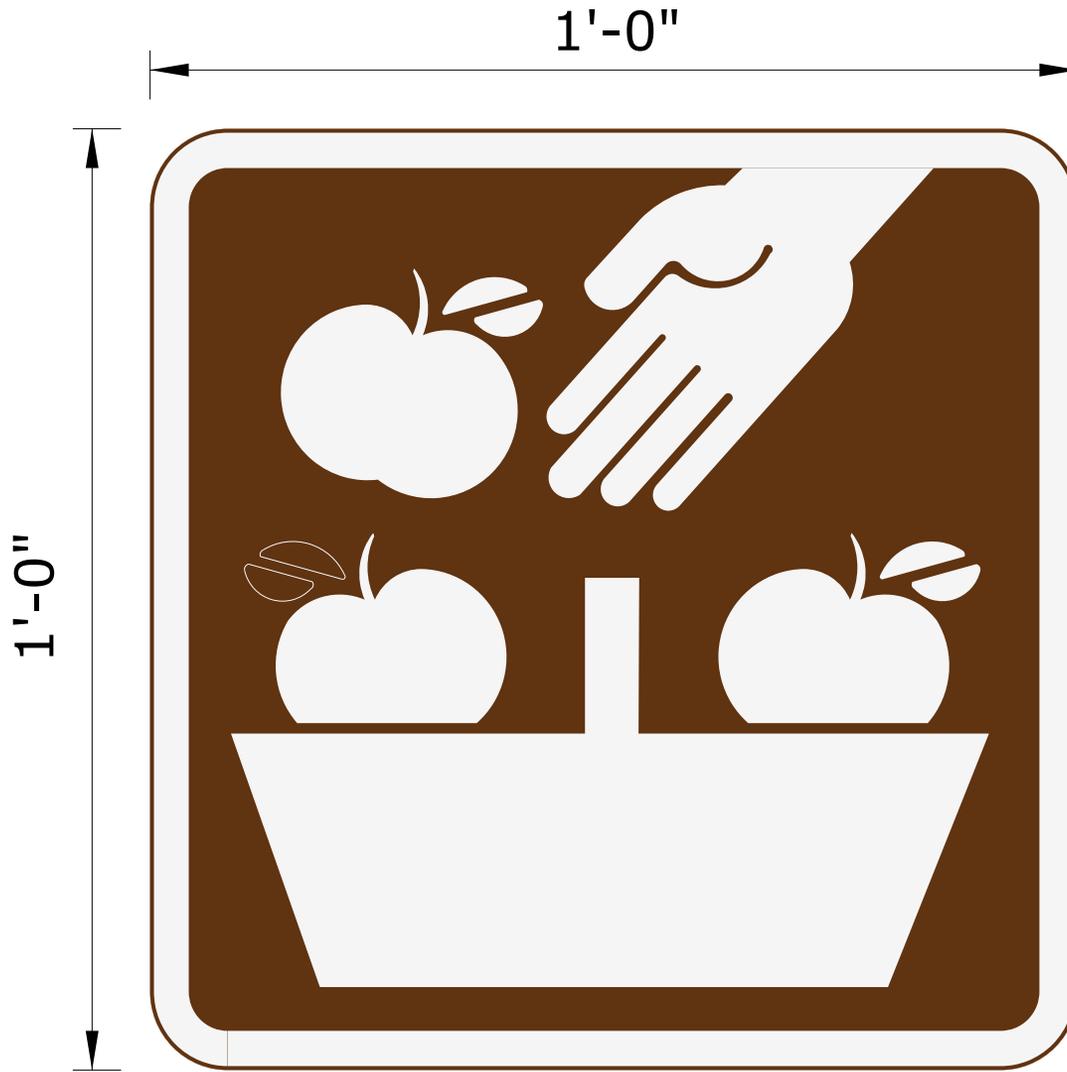

SIGN NUMBER	71-7911
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7911 to 71-7911.


PLOTTED : 12/17/2018

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

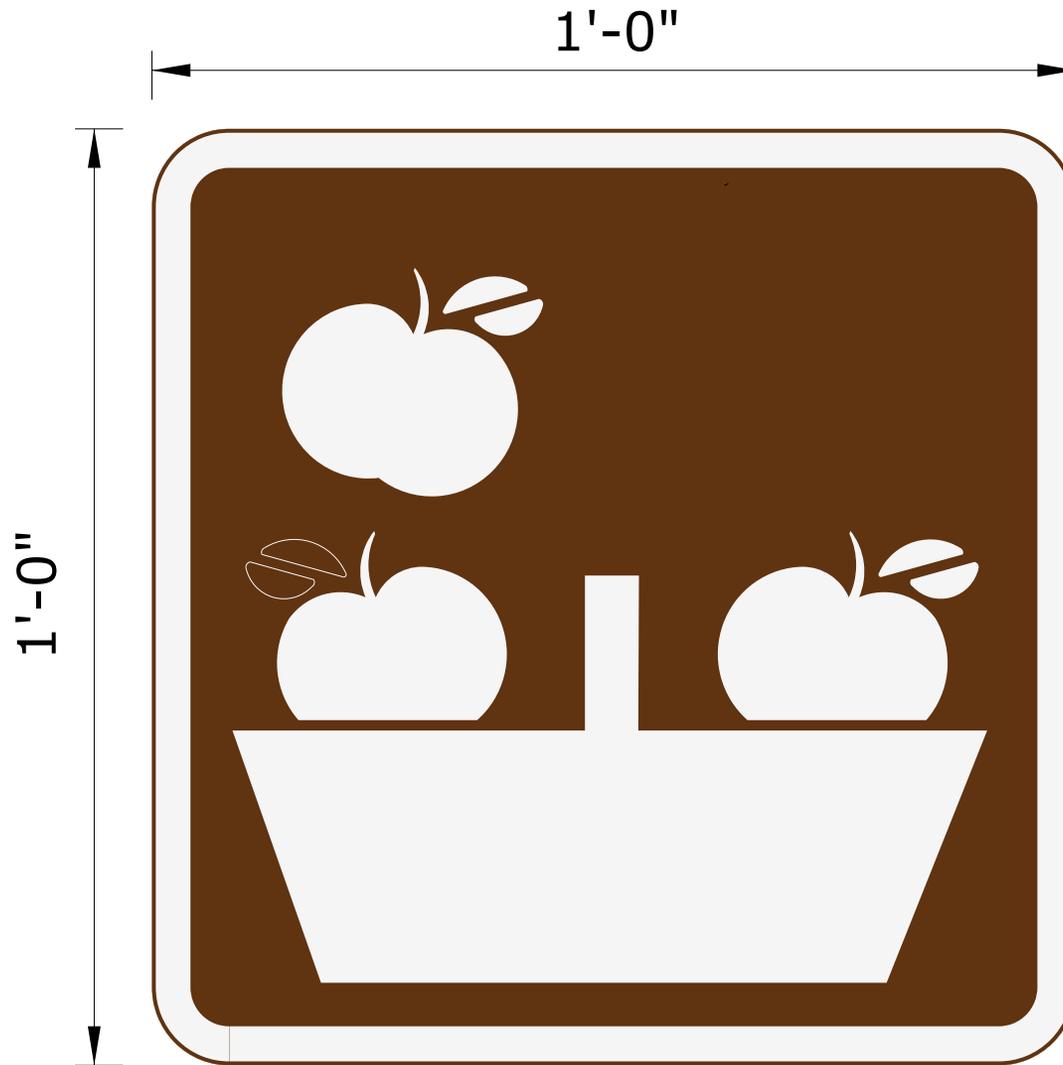


SIGN NUMBER	71-7912
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7912 to 71-7912.	


PLOTTED : 12/17/2018

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

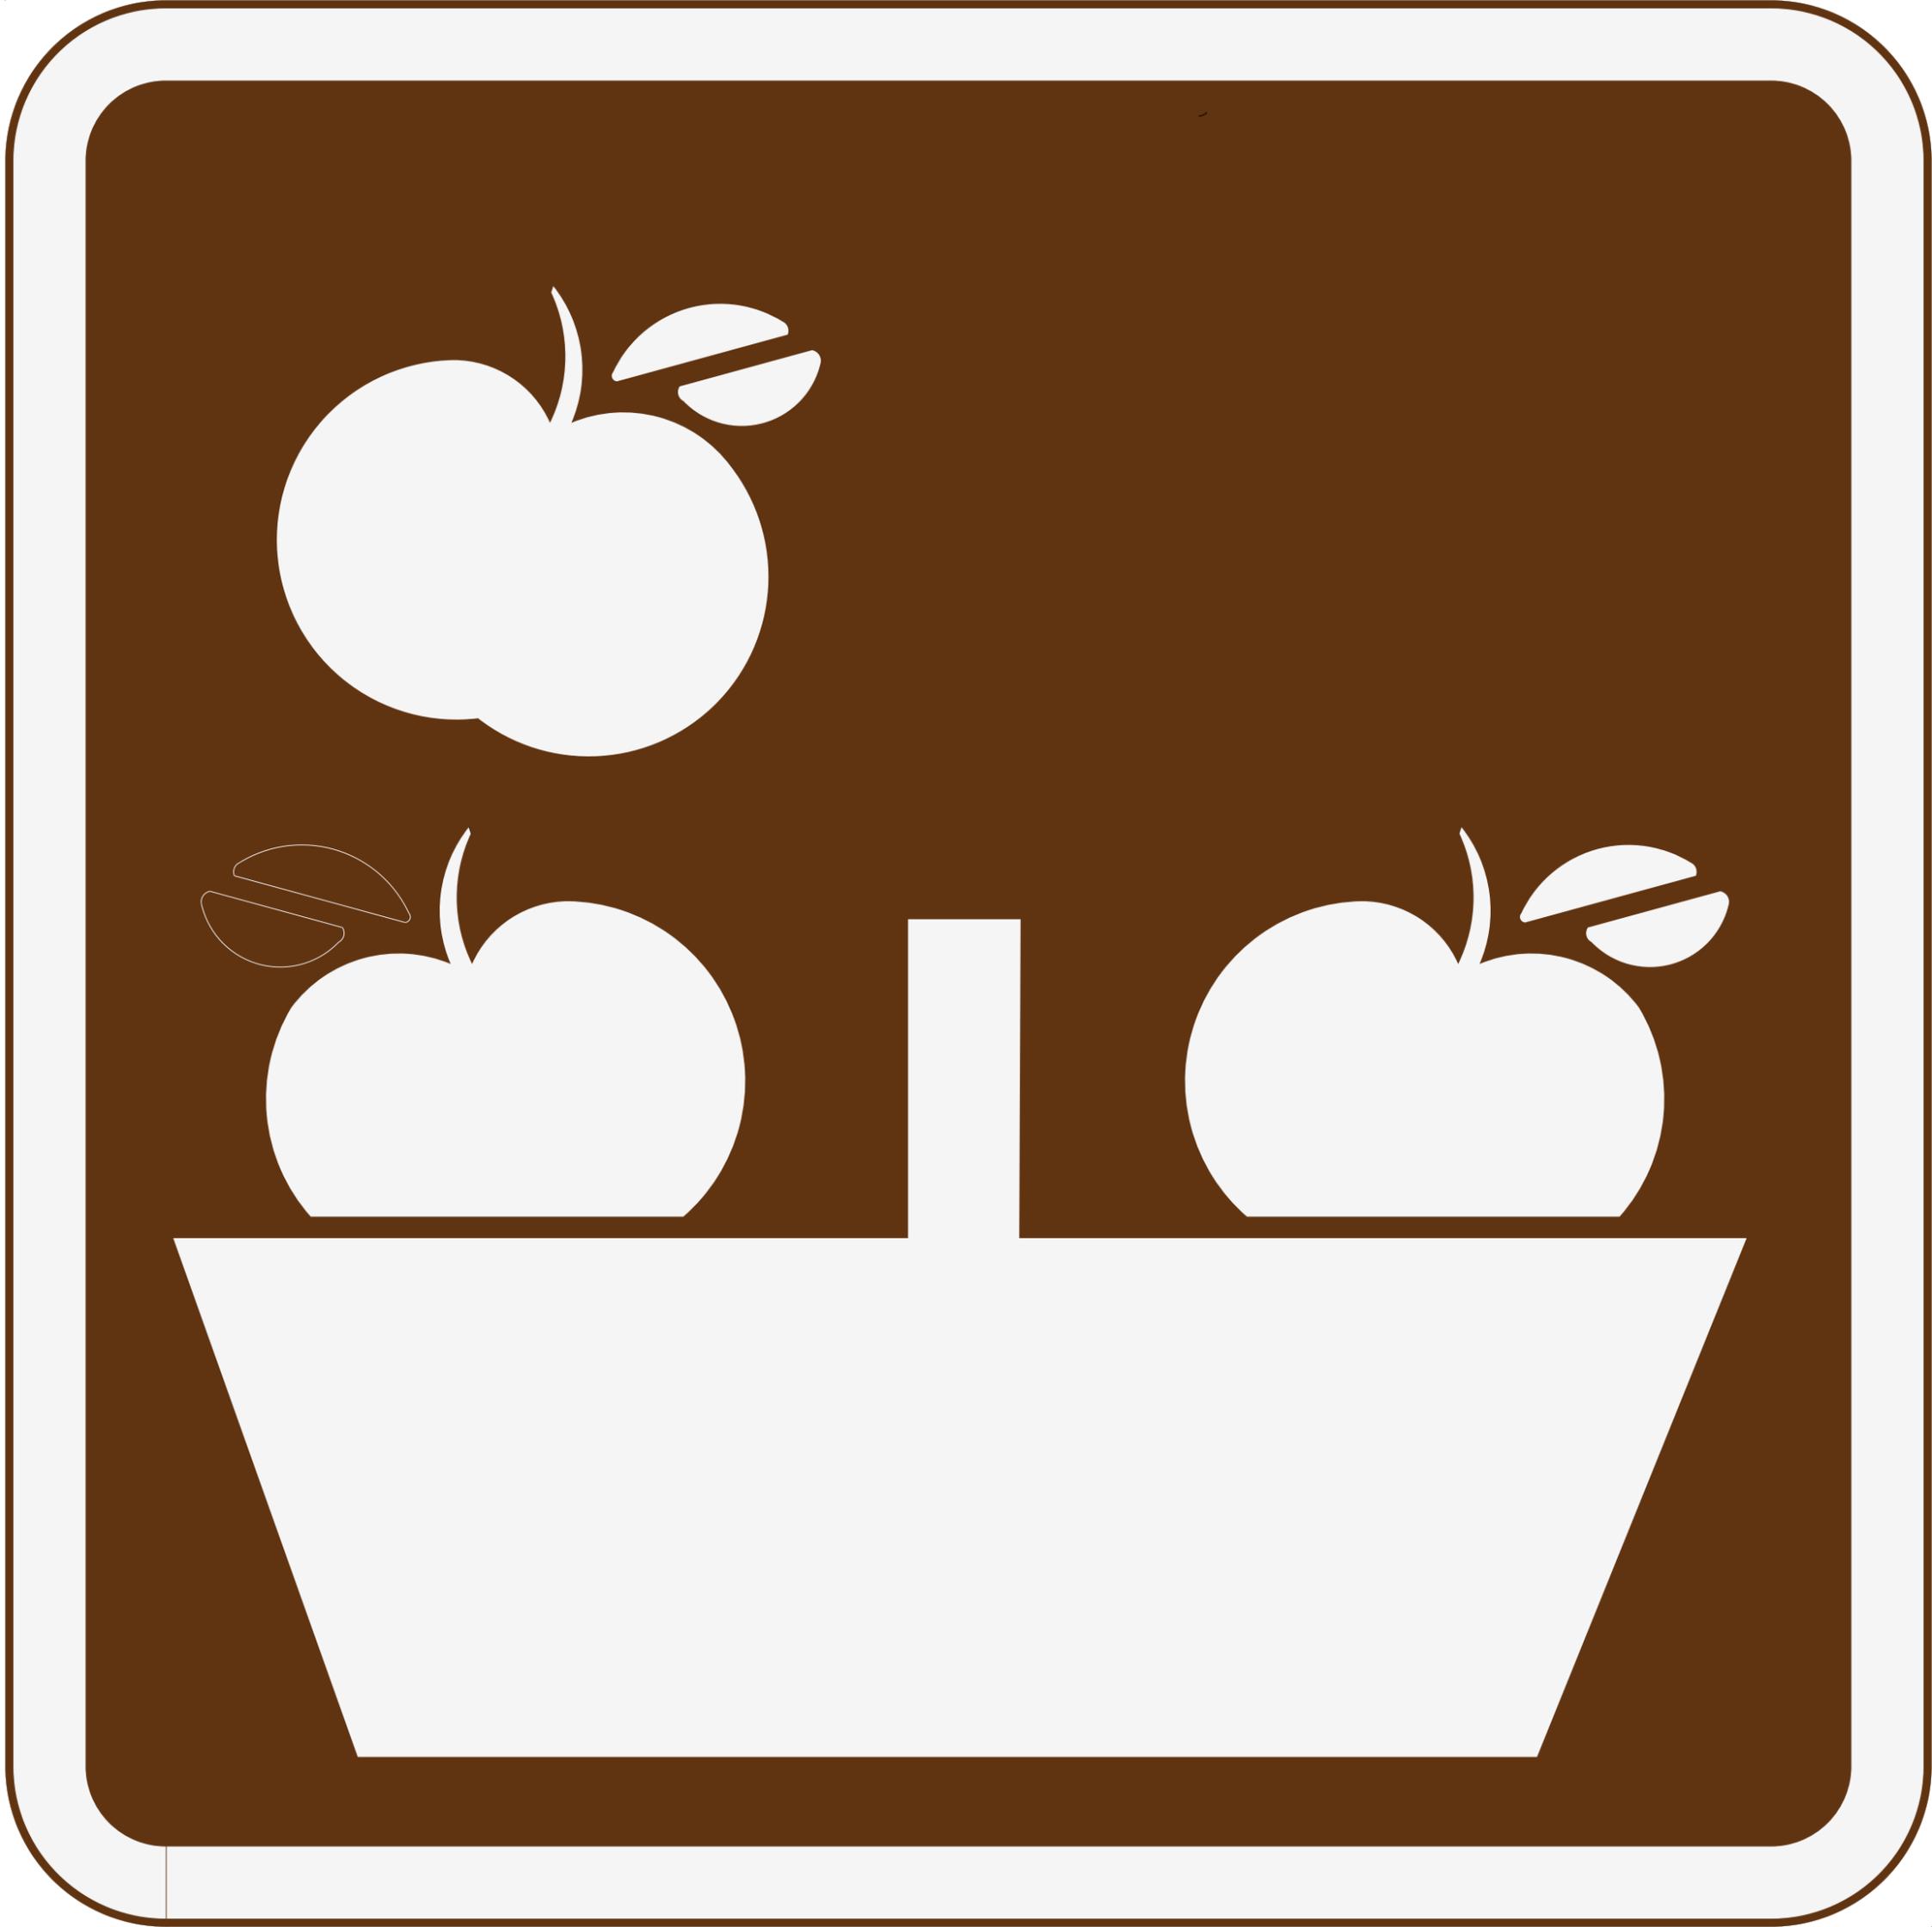

SIGN DETAIL

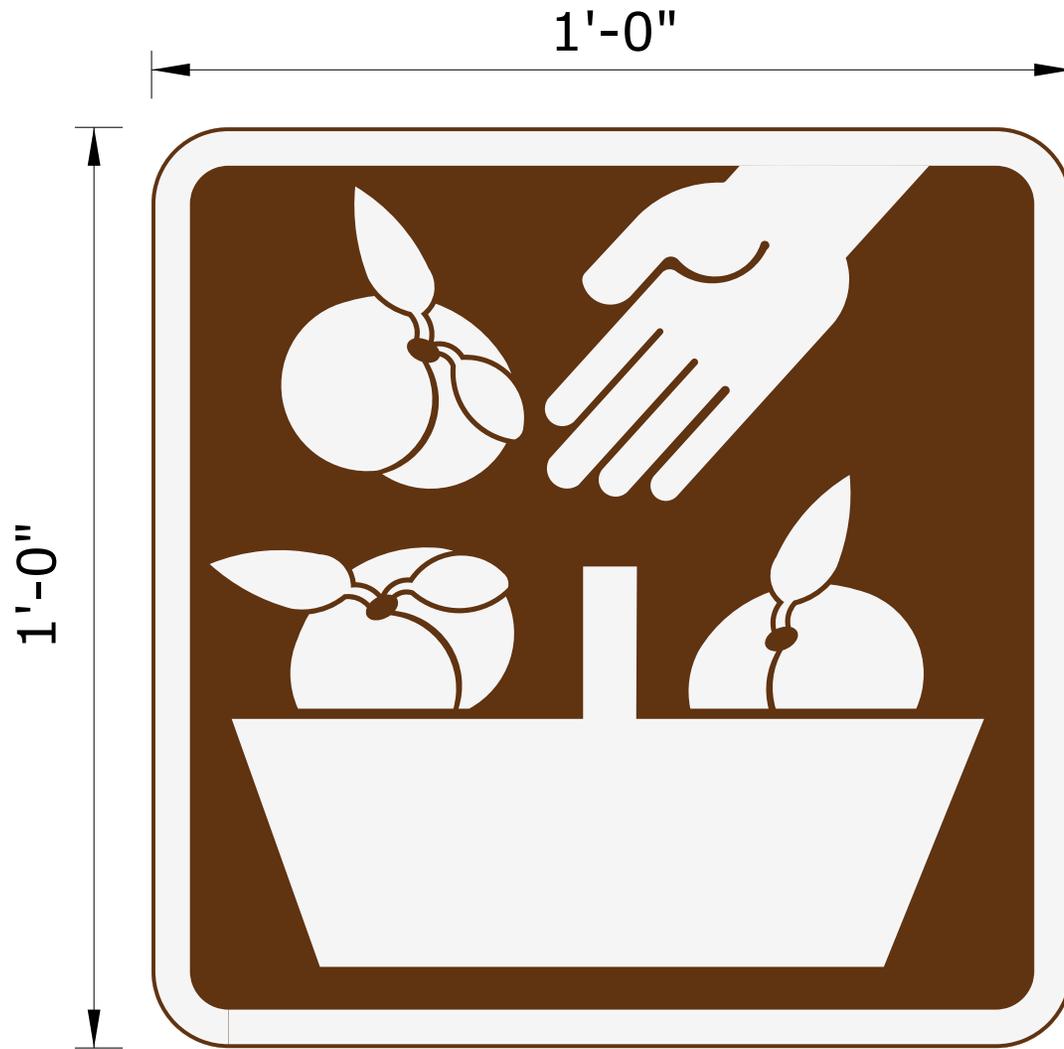

SIGN NUMBER	71-7913
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7913 to 71-7913.	

PLOTTED : 12/17/2018

See 2nd page for  
Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

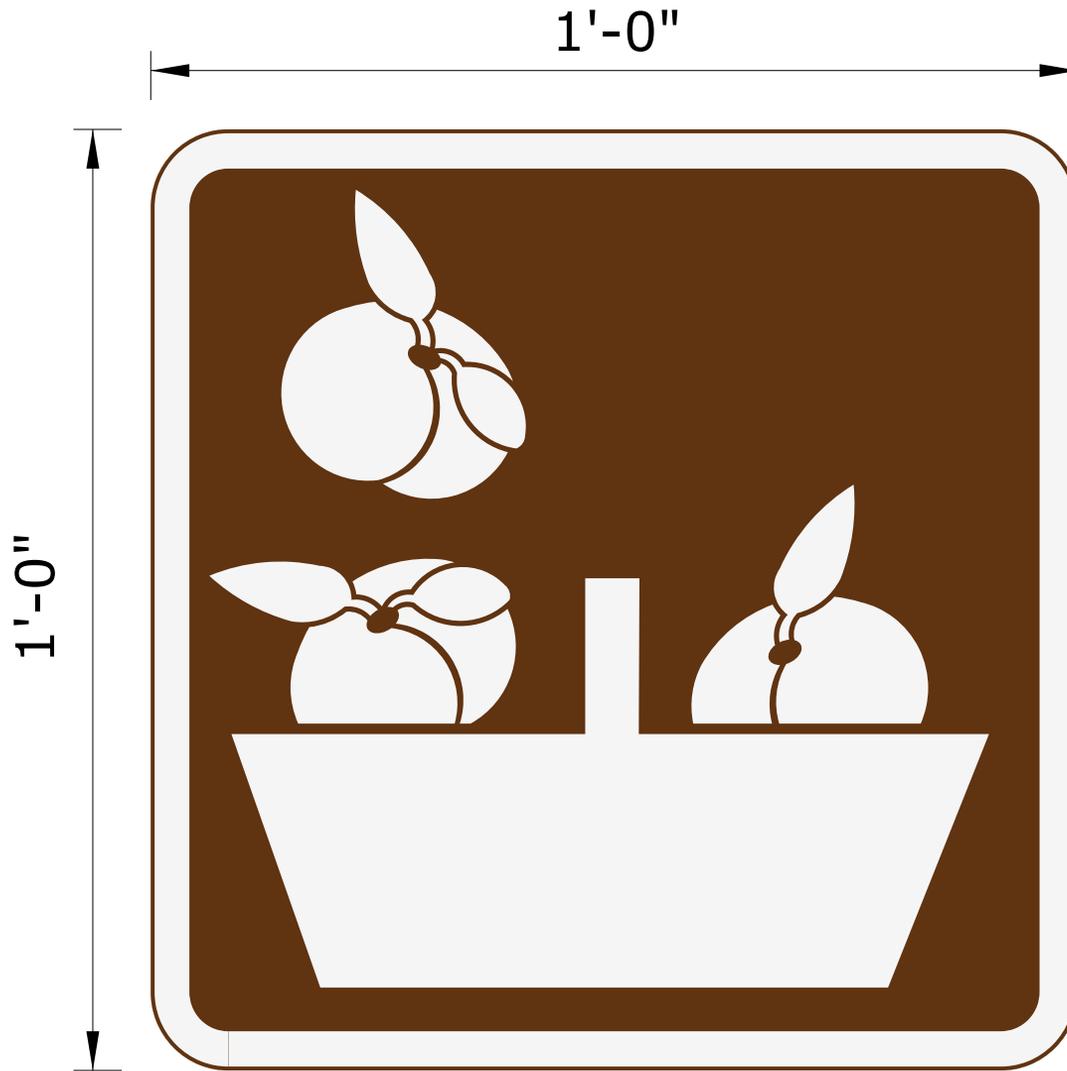

SIGN NUMBER	71-7914
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7914 to 71-7914.

PLOTTED :12/18/2018

See 2nd page for Full scale detail.


Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

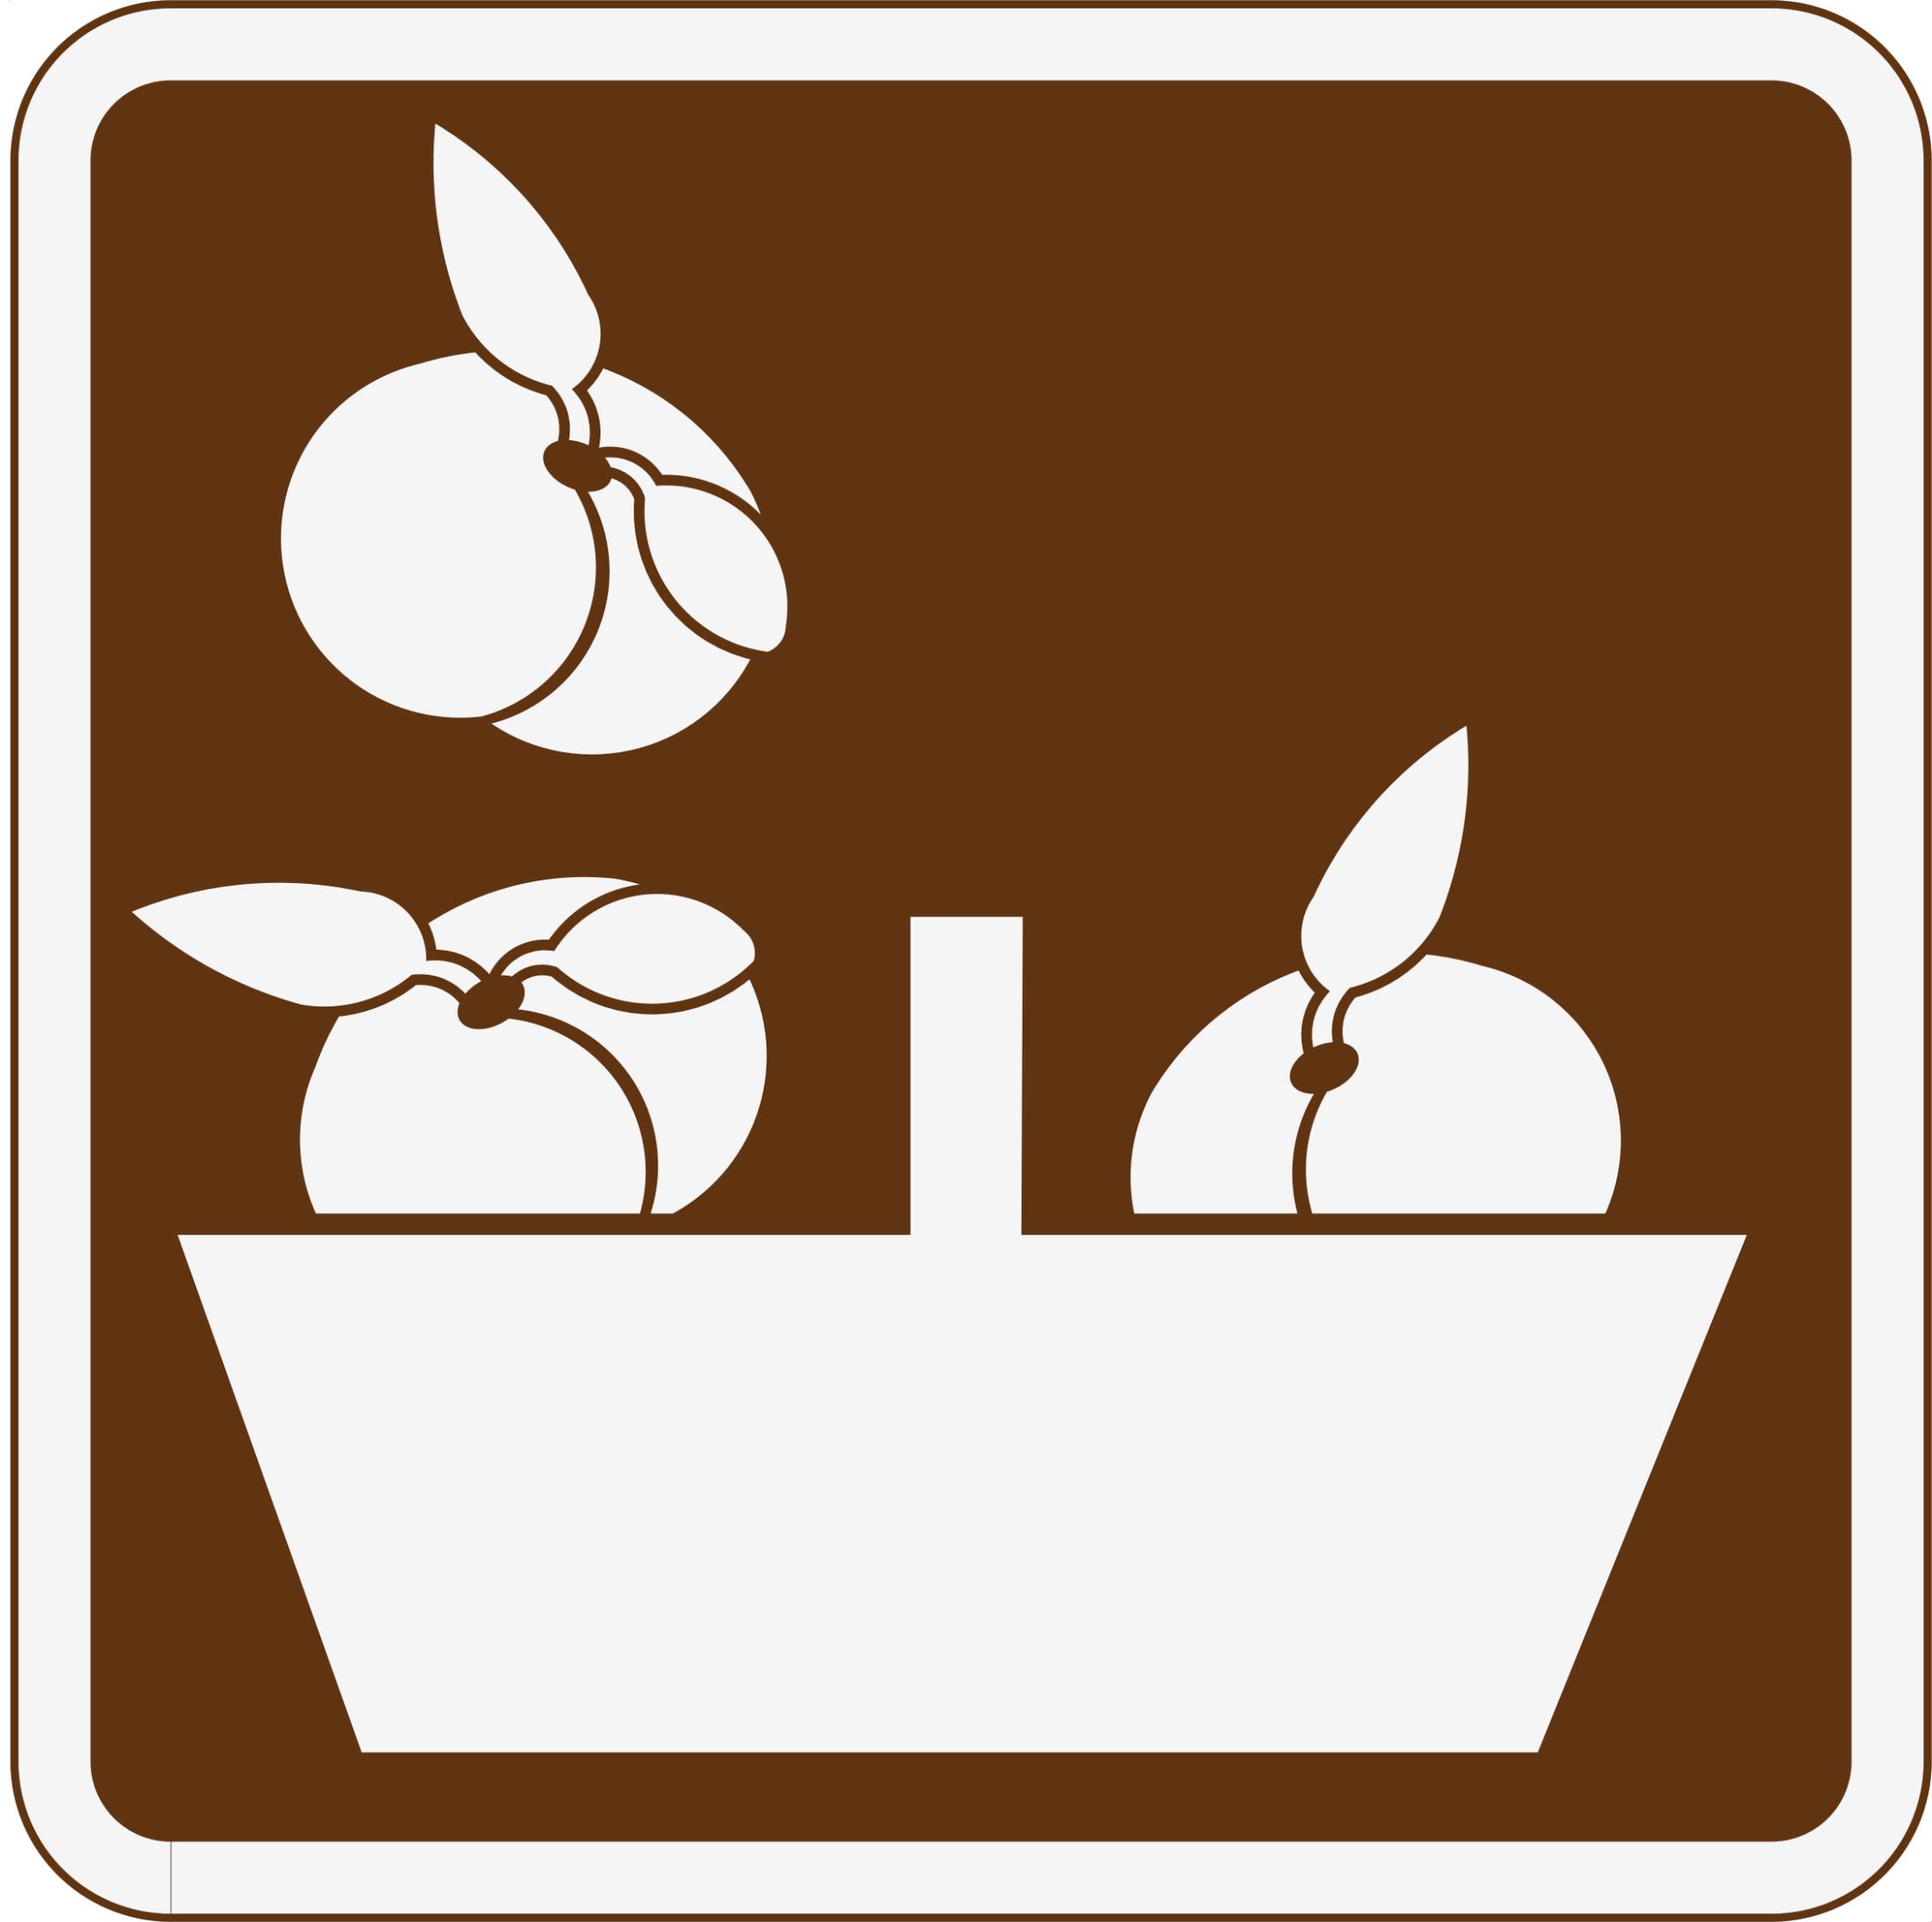

SIGN DETAIL

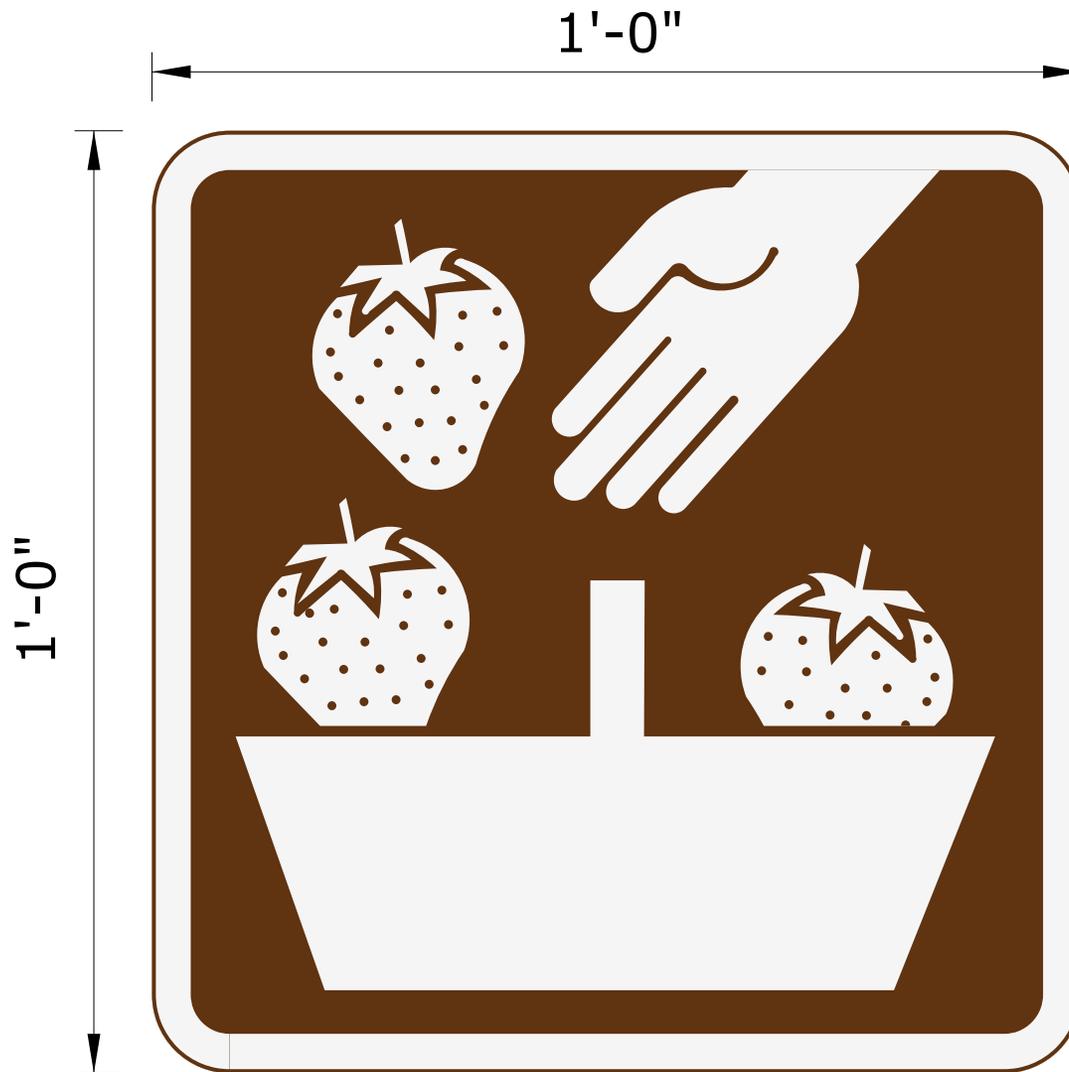

SIGN NUMBER	71-7915
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: *
	COLOR: Brown
SYMBOL/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7915 to 71-7915.	

PLOTTED : 12/18/18

See 2nd page for Full scale detail.


Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

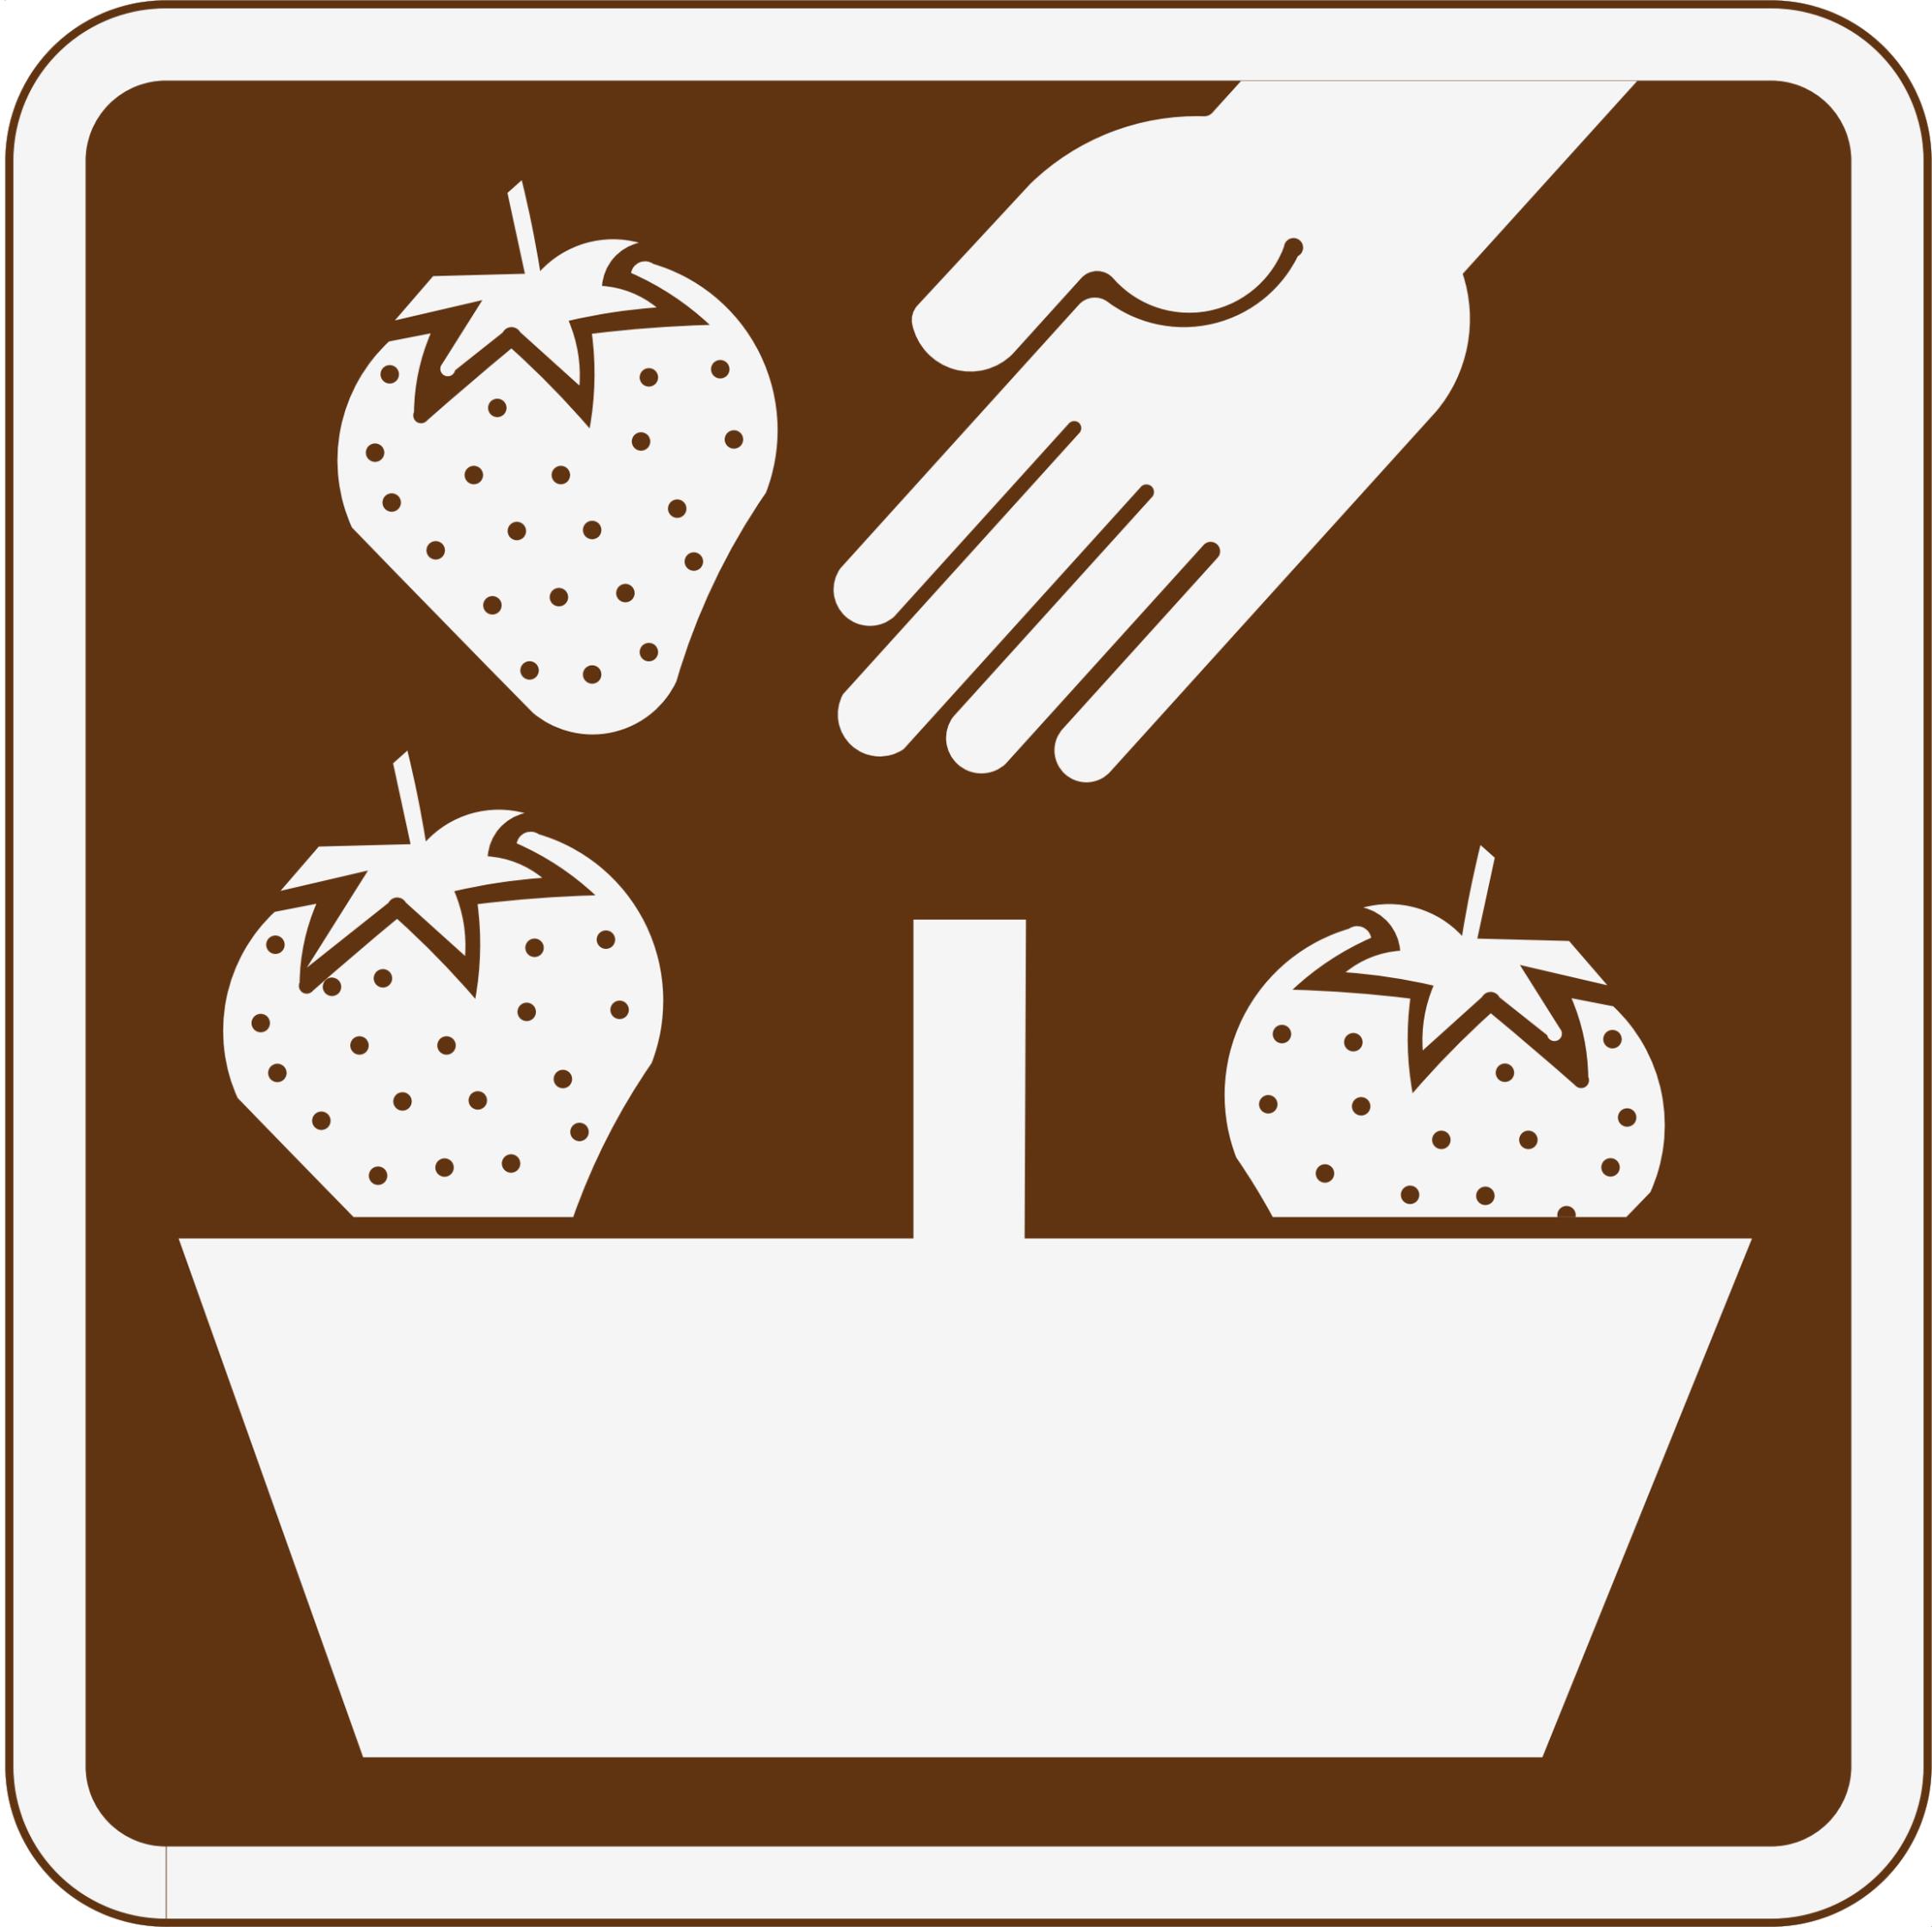

SIGN DETAIL

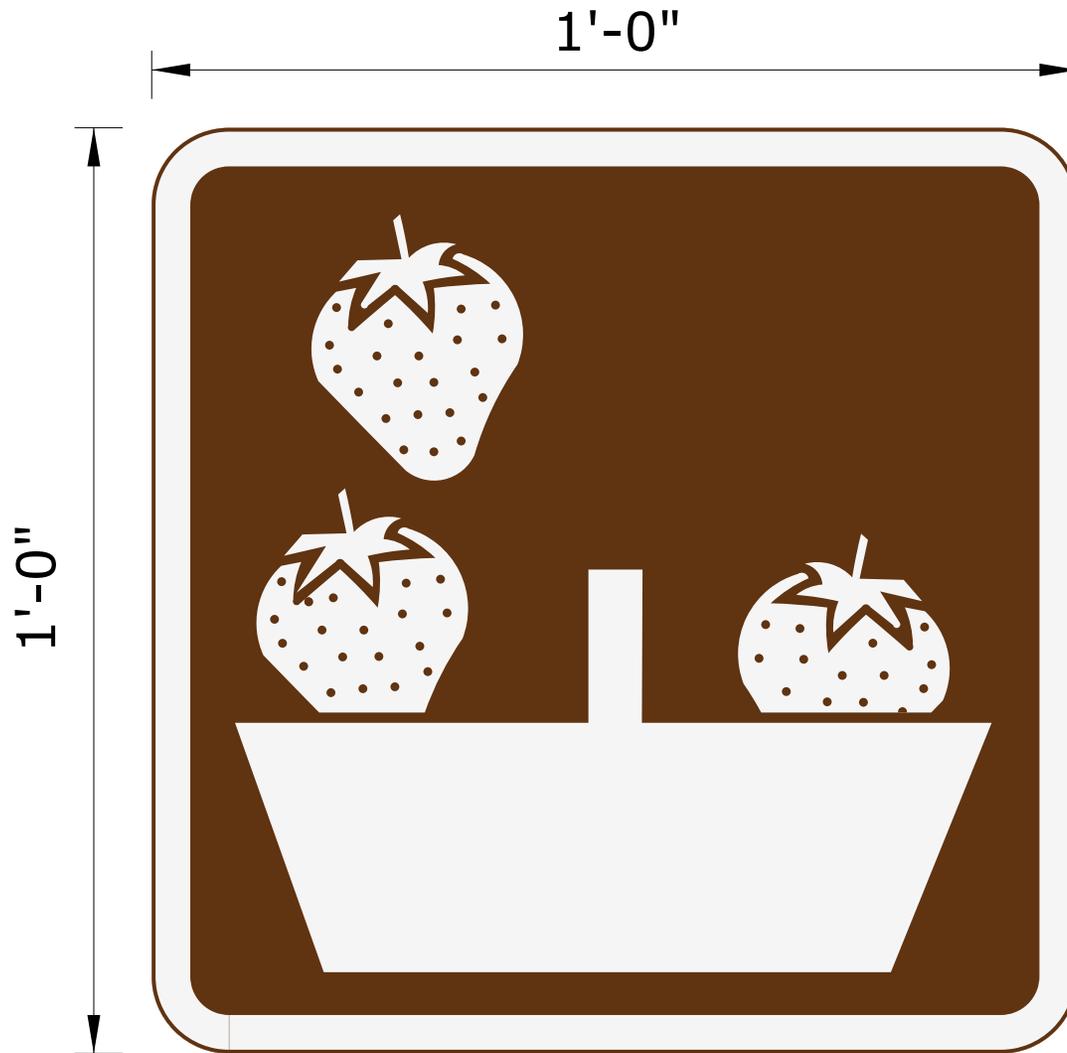

SIGN NUMBER	71-7916
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**

Changed sign # from 51-7916 to 71-7916.

PLOTTED : 12/18/18

See 2nd page for  
Full scale detail.


Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

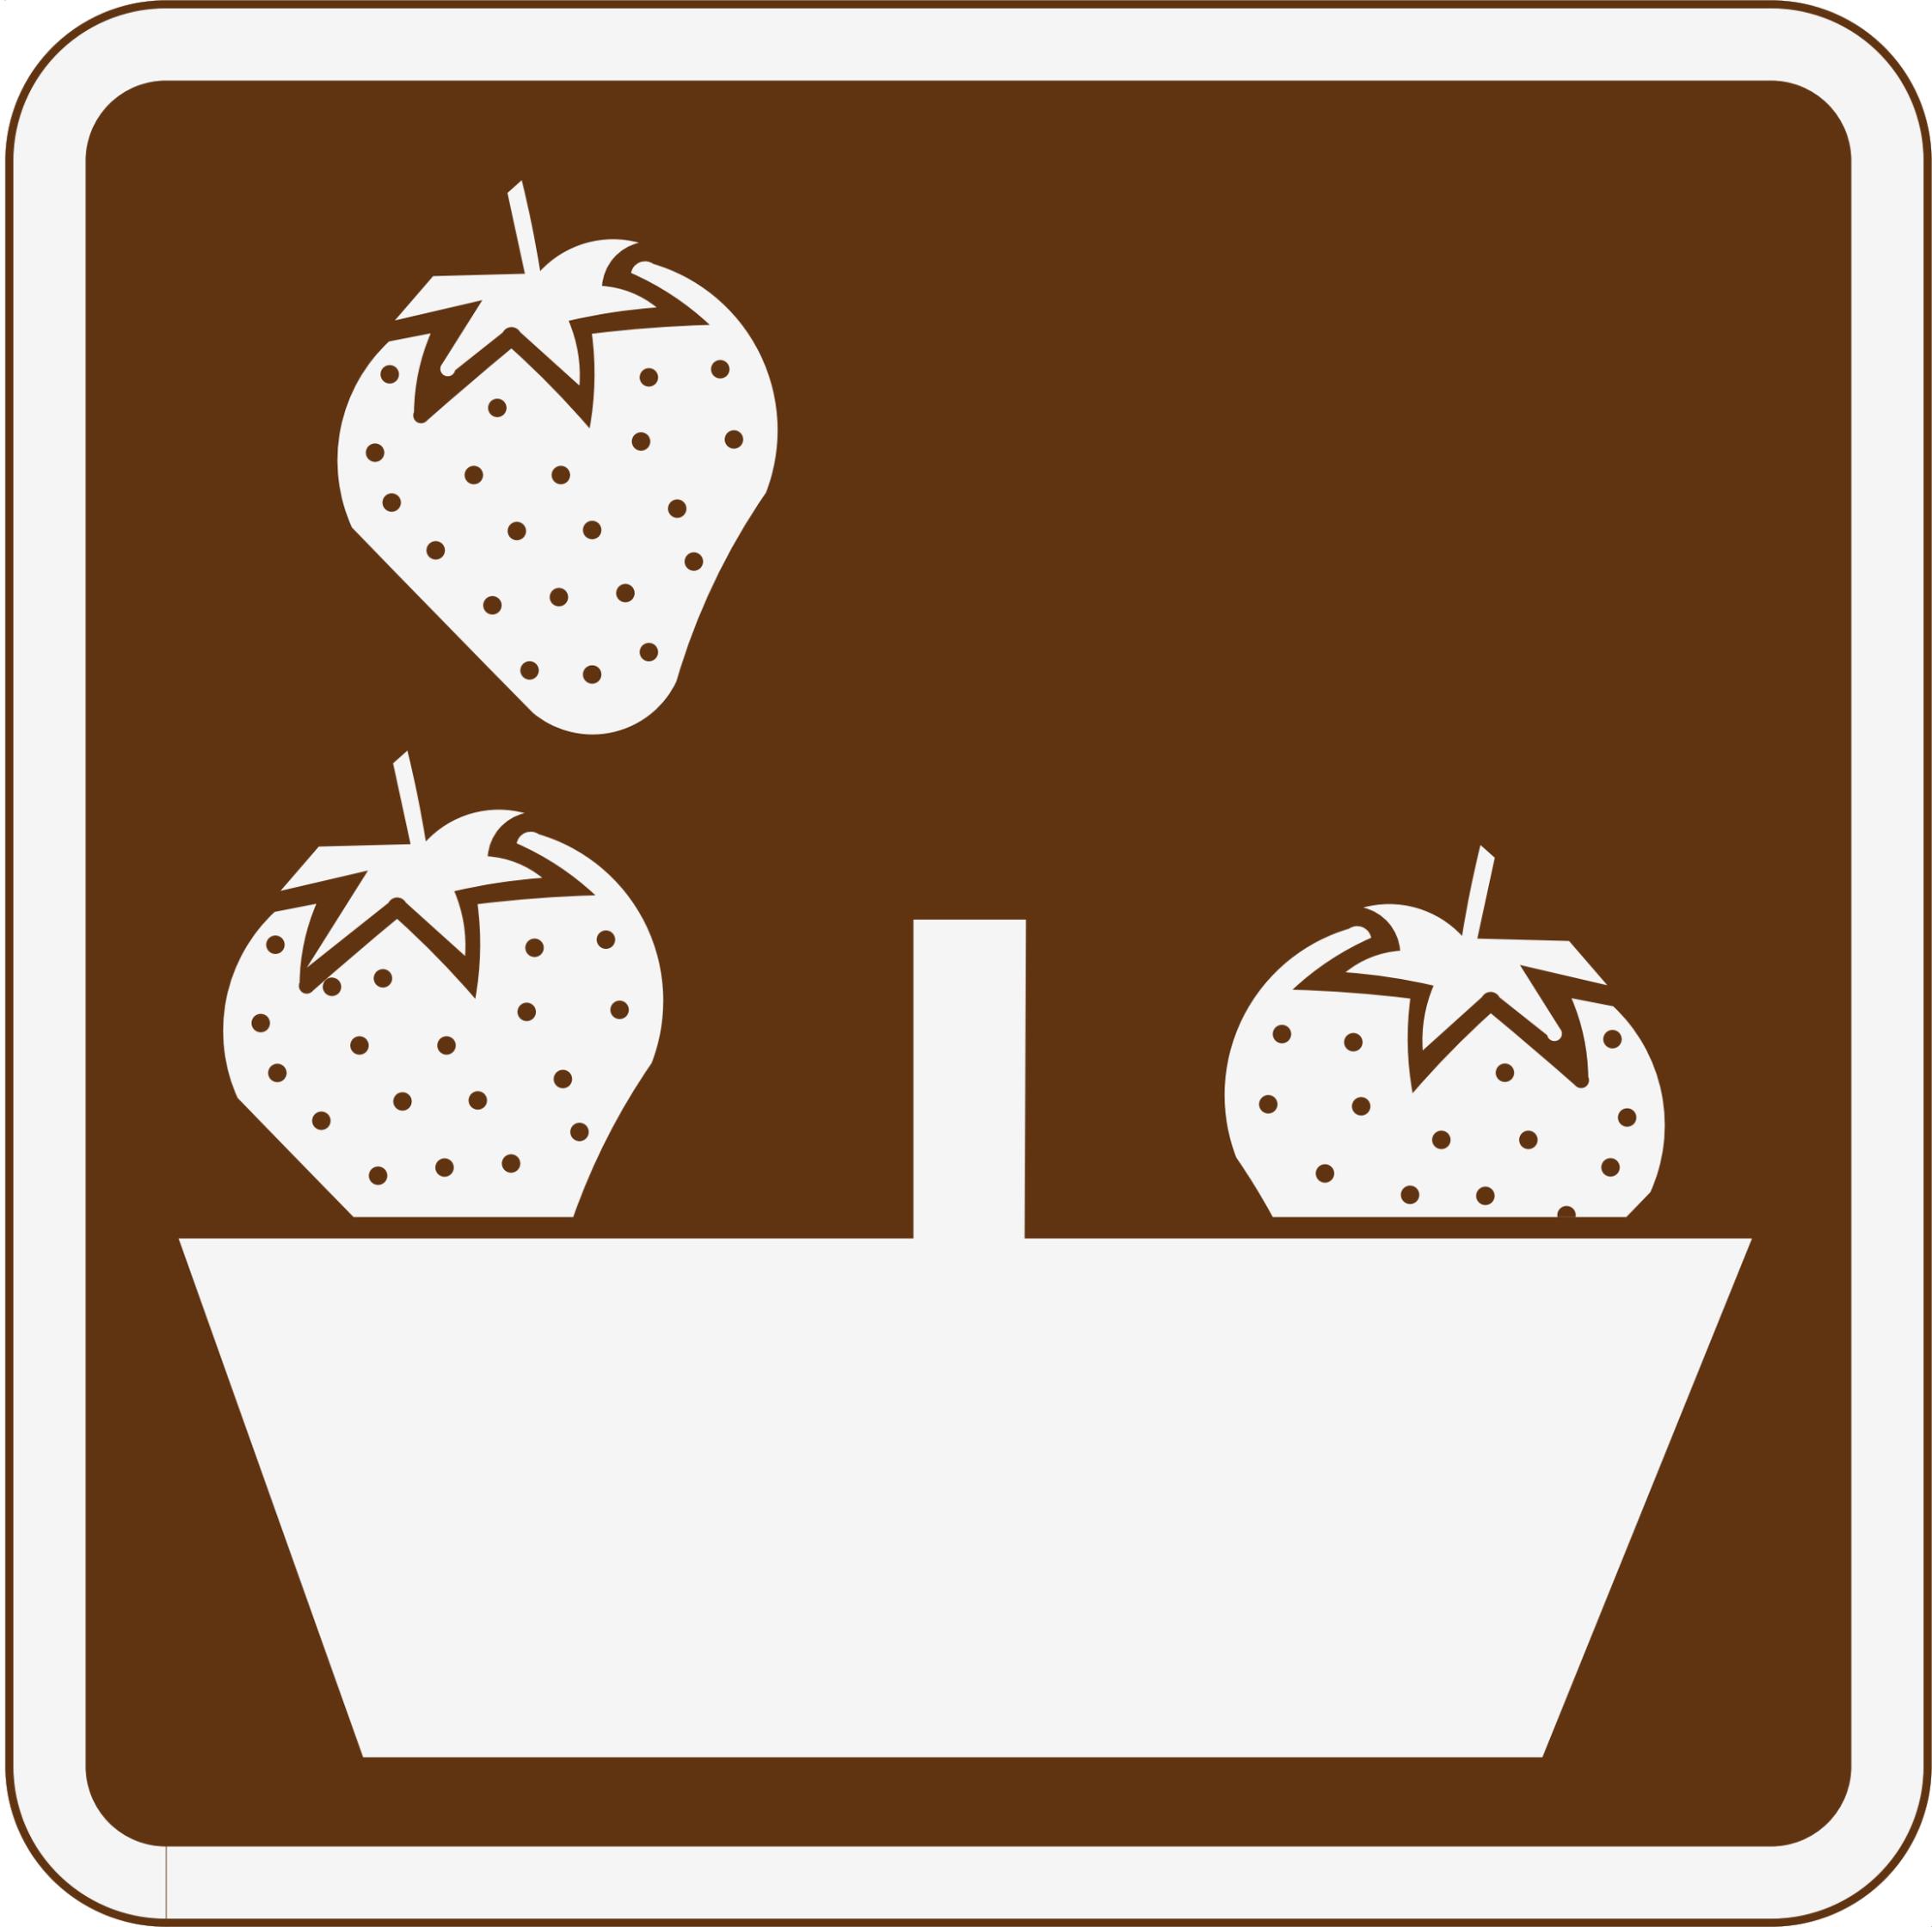

SIGN DETAIL

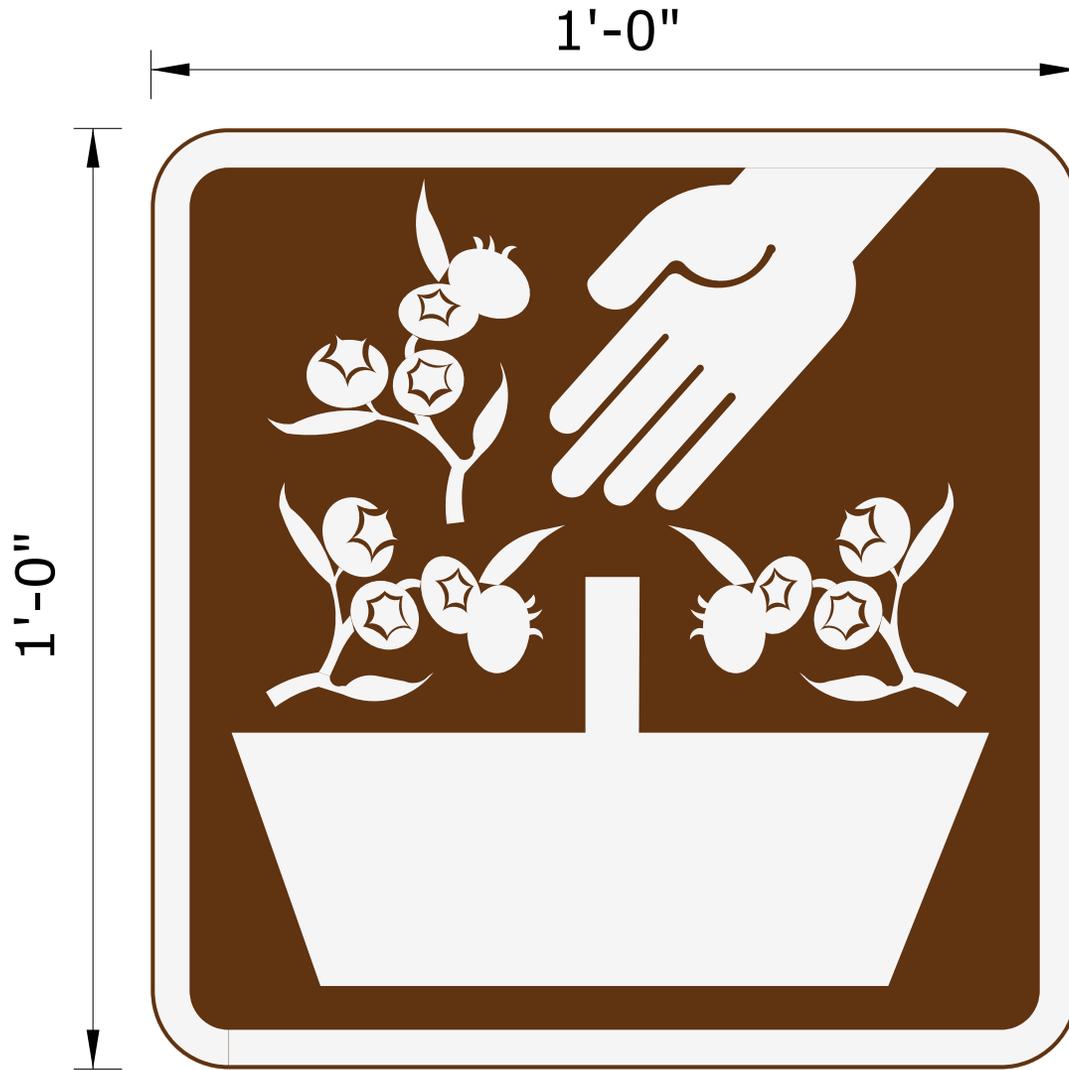

SIGN NUMBER	71-7917
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: *
	COLOR: Brown
SYMBOL/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	
<b>REV'D 12/18</b>	
Changed sign # from 51-7917 to 71-7917.	

PLOTTED :12/18/18

See 2nd page for  
Full scale detail.


Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

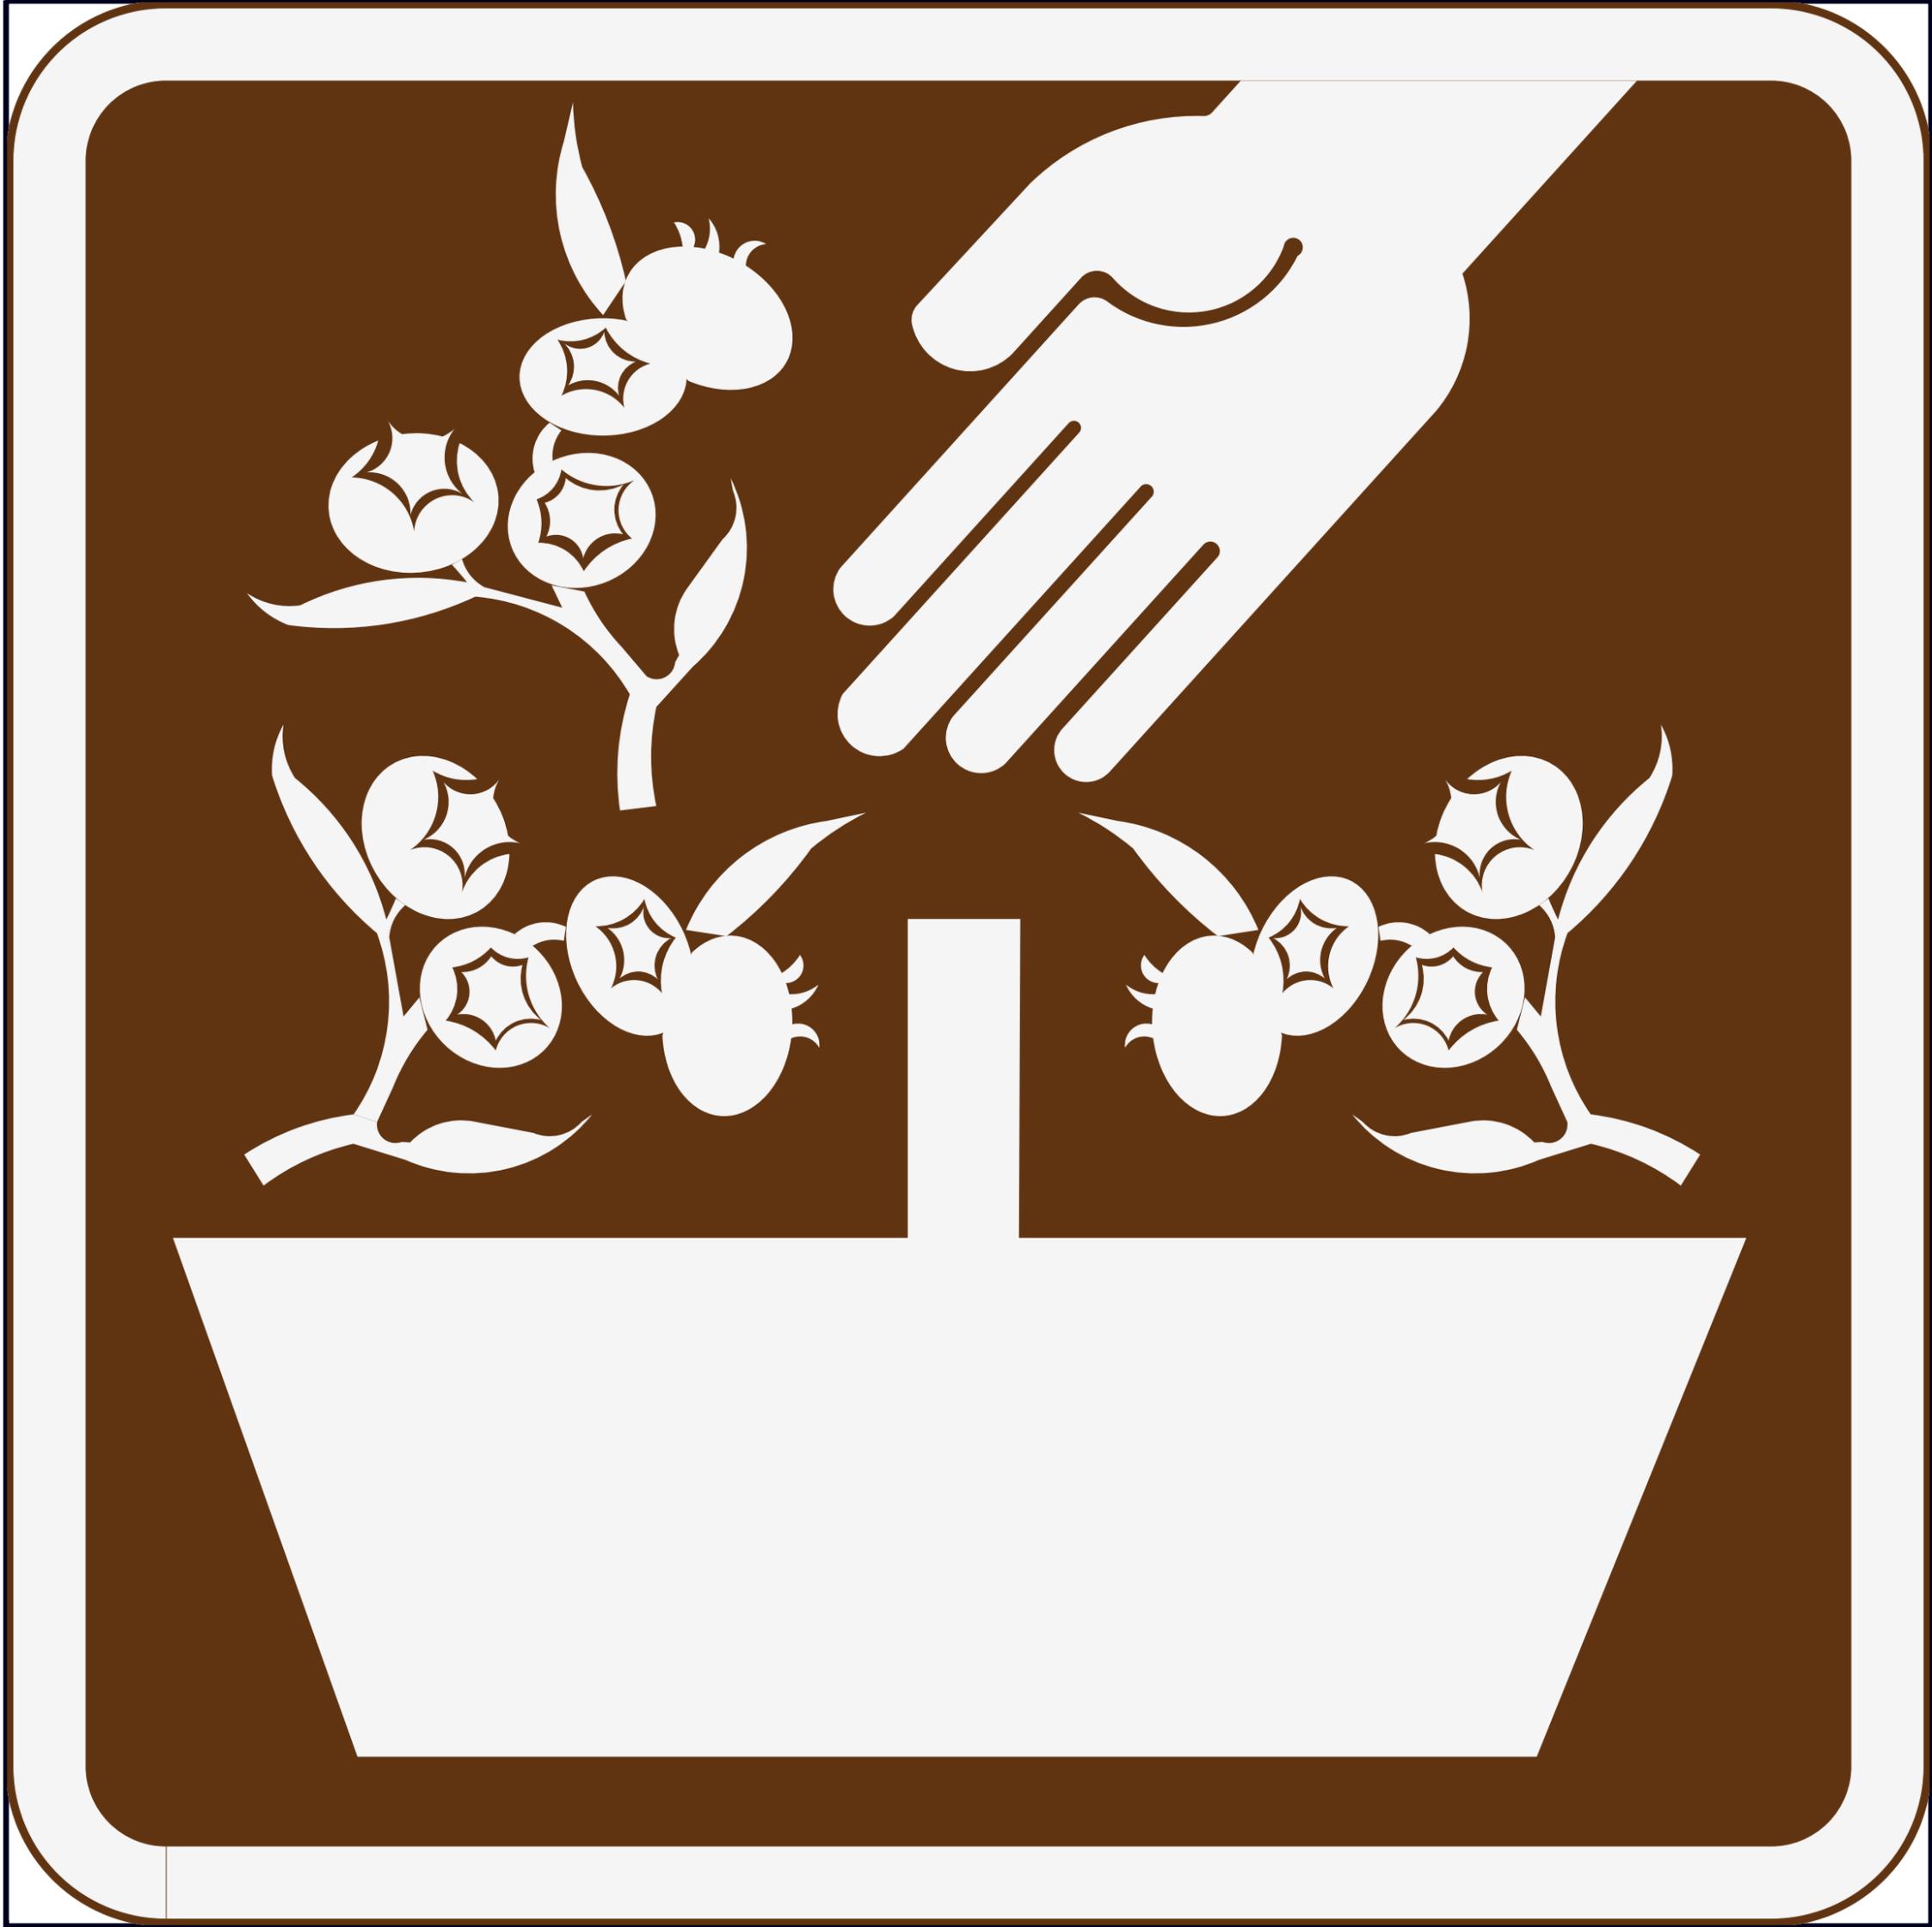

SIGN DETAIL

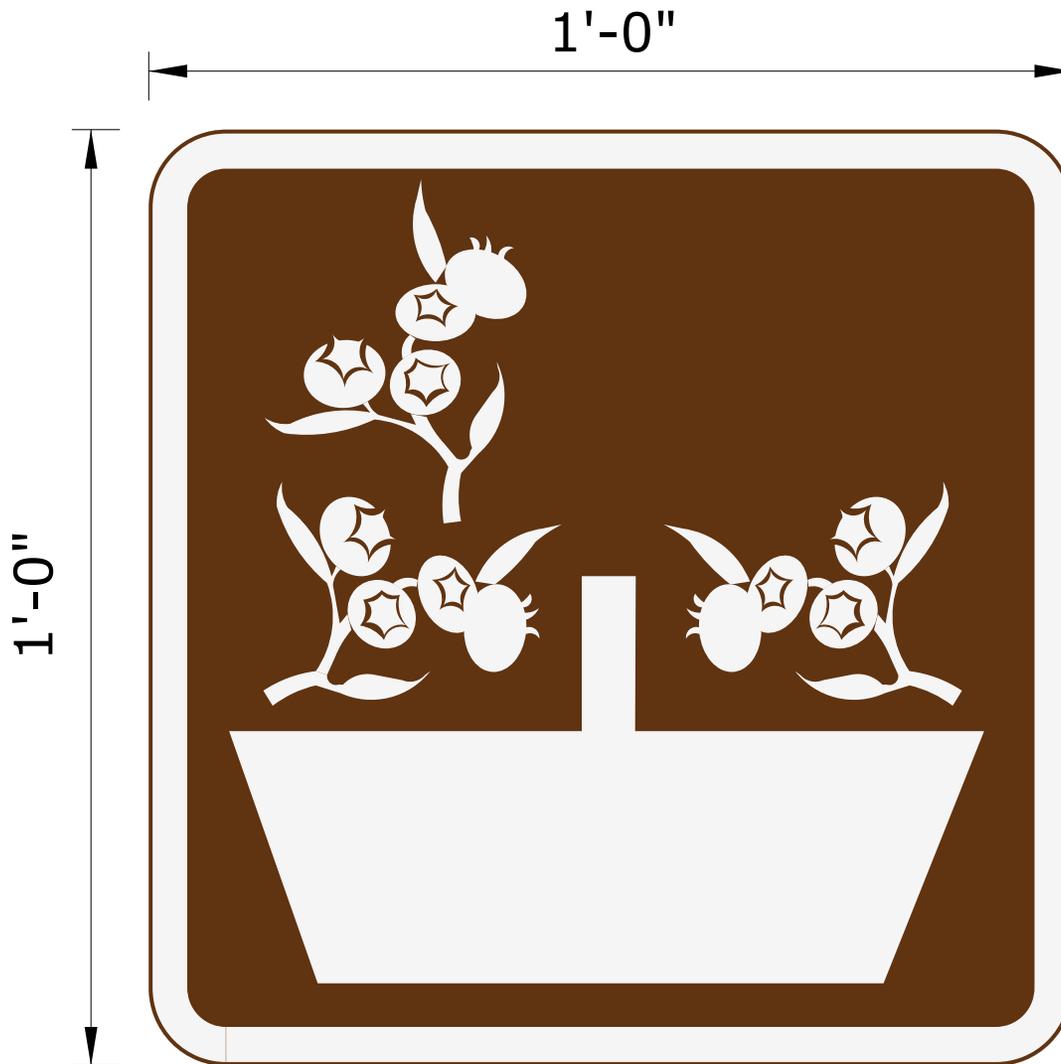

SIGN NUMBER	71-7918
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**

Changed sign # from 51-7918 to 71-7918.

PLOTTED :12/18/18

See 2nd page for  
Full scale detail.


Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

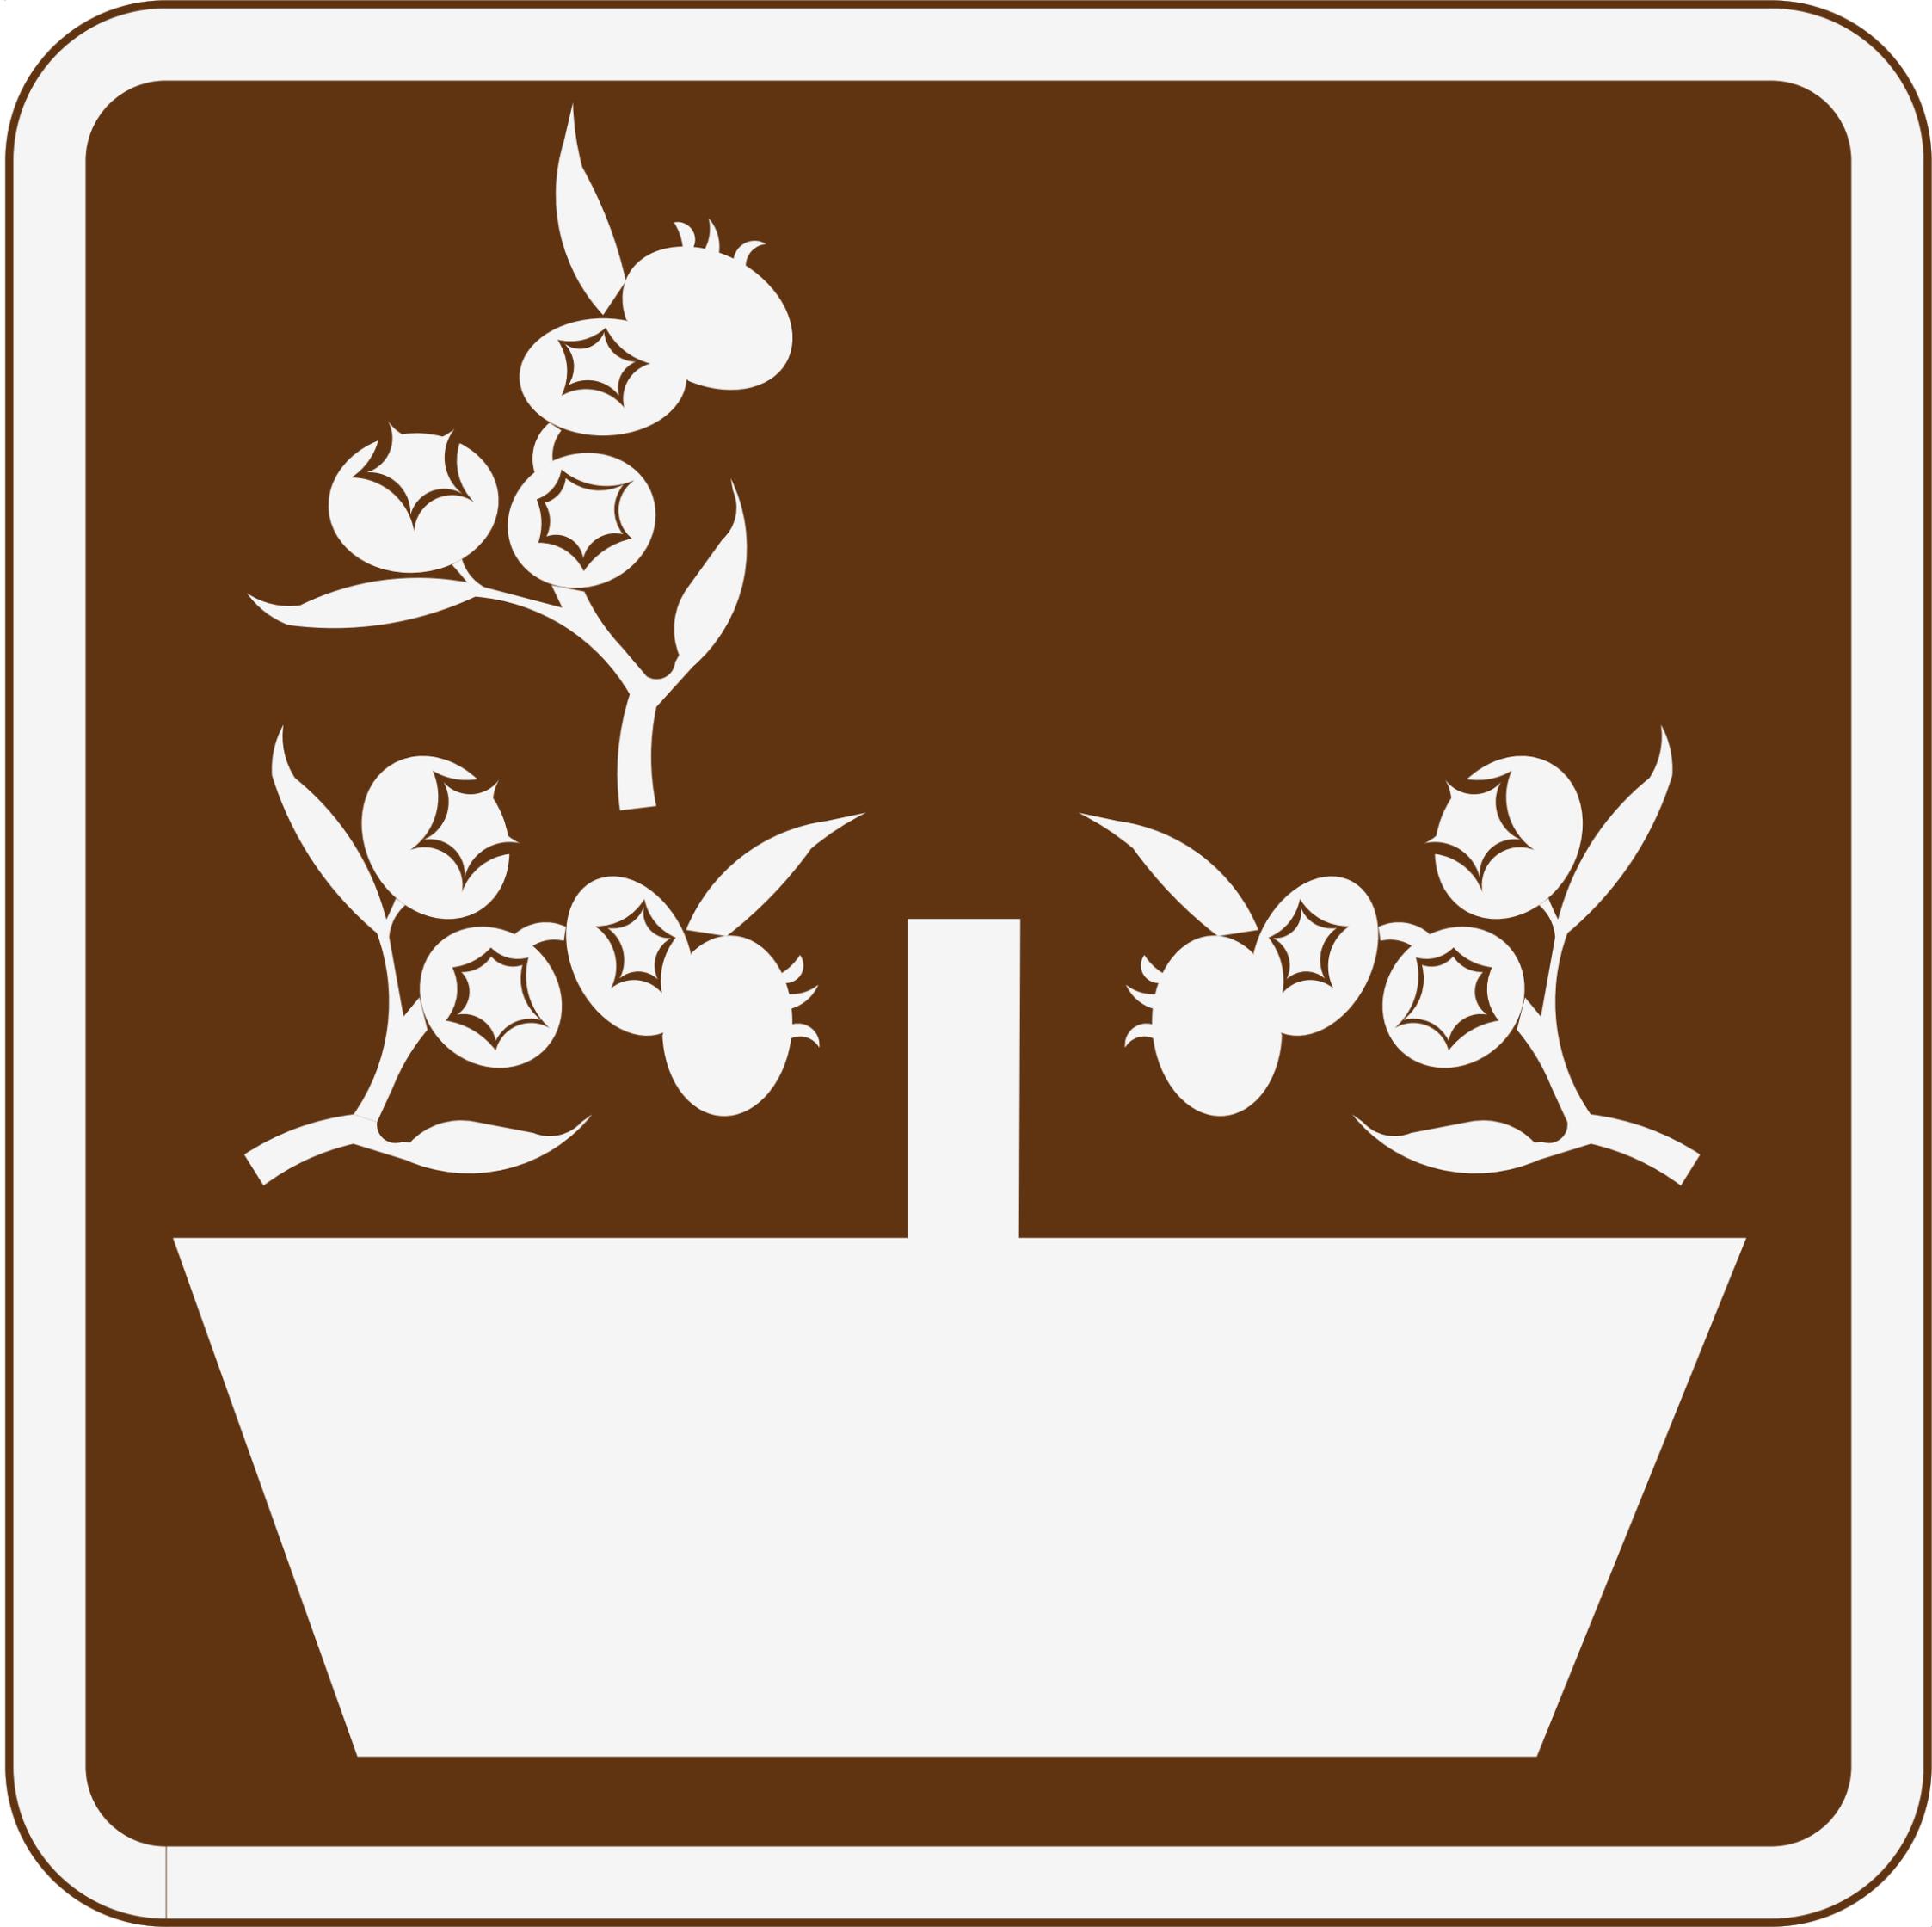

SIGN DETAIL

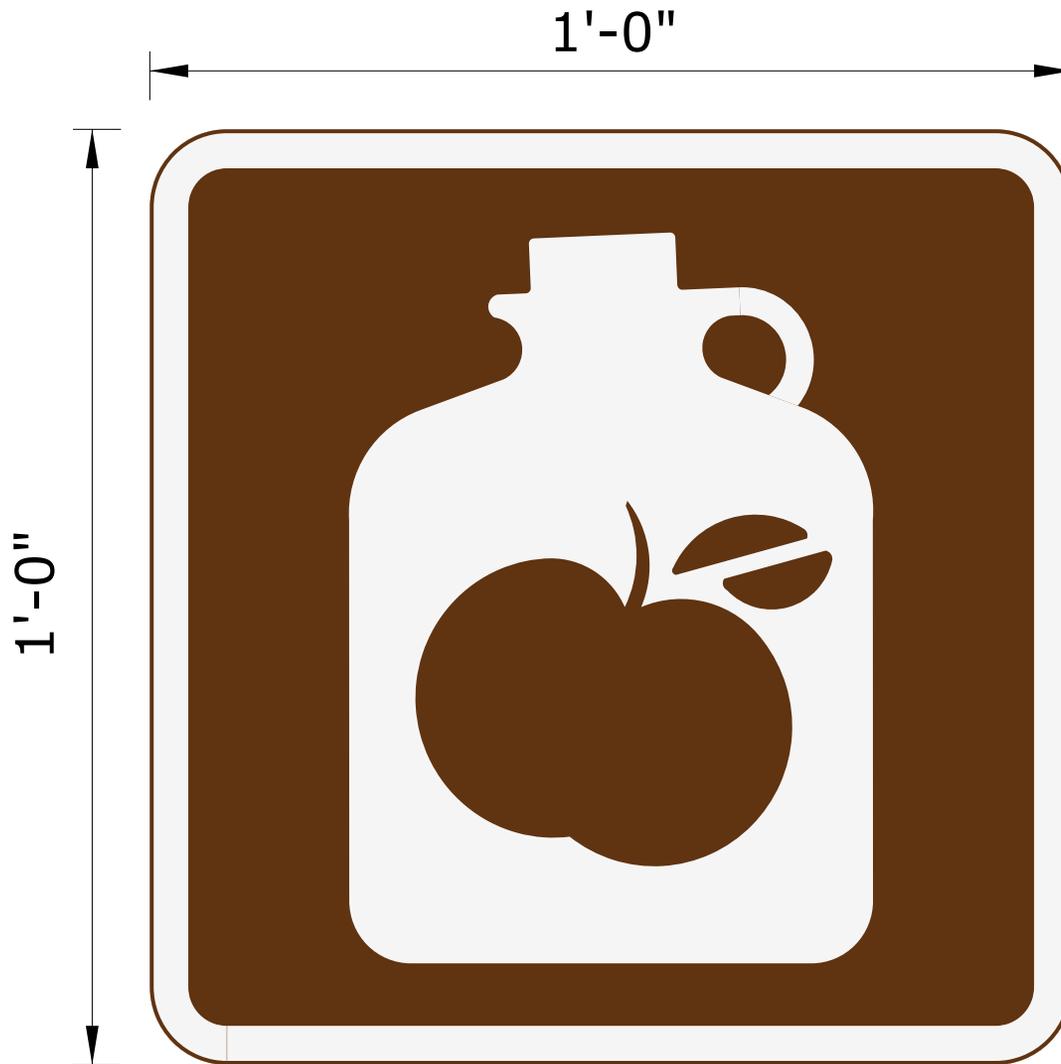

SIGN NUMBER	71-7919
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: *
	COLOR: Brown
SYMBOL/BORDER	TYPE: *
	COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**

Changed sign # from 51-7919 to 71-7919.

PLOTTED : 12/18/18

See 2nd page for  
Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

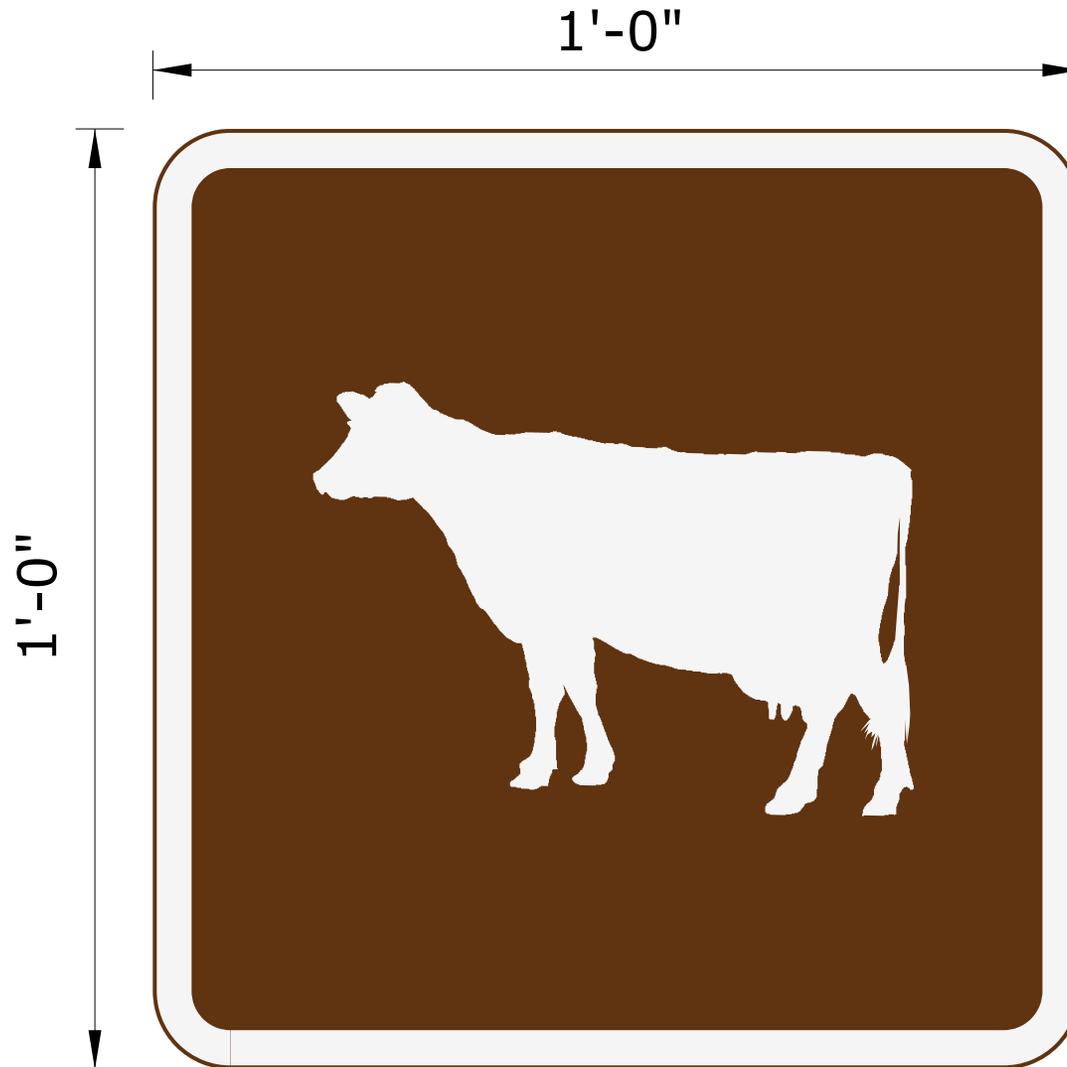


SIGN NUMBER	71-7920
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7920 to 71-7920.


PLOTTED : 12/18/18

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

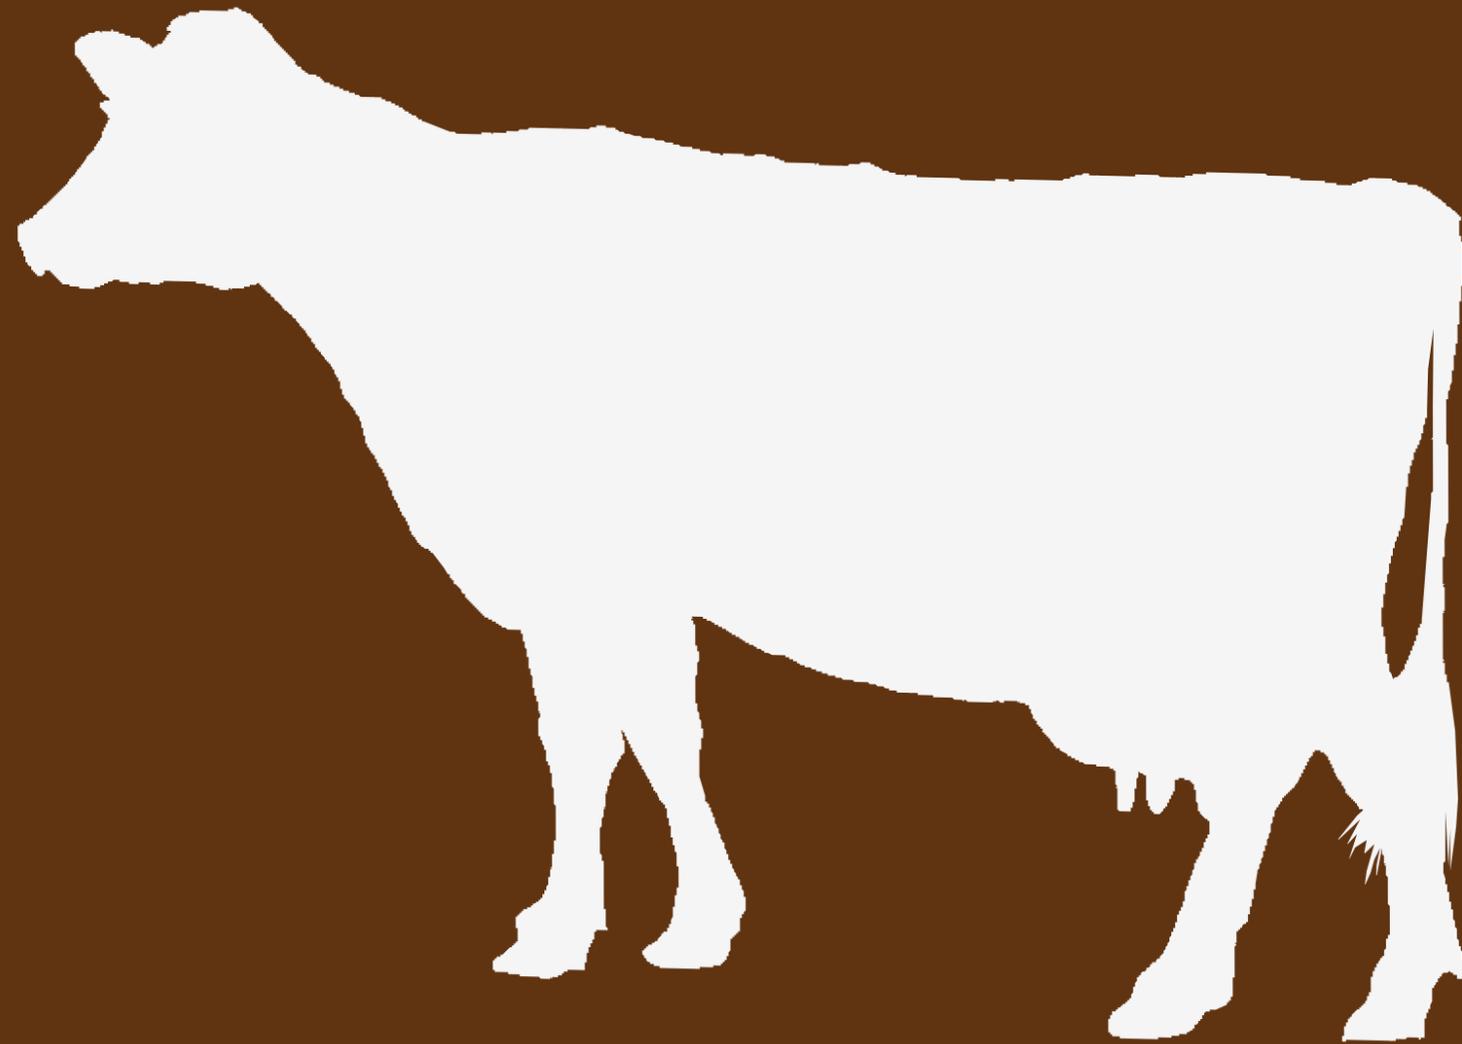

SIGN DETAIL

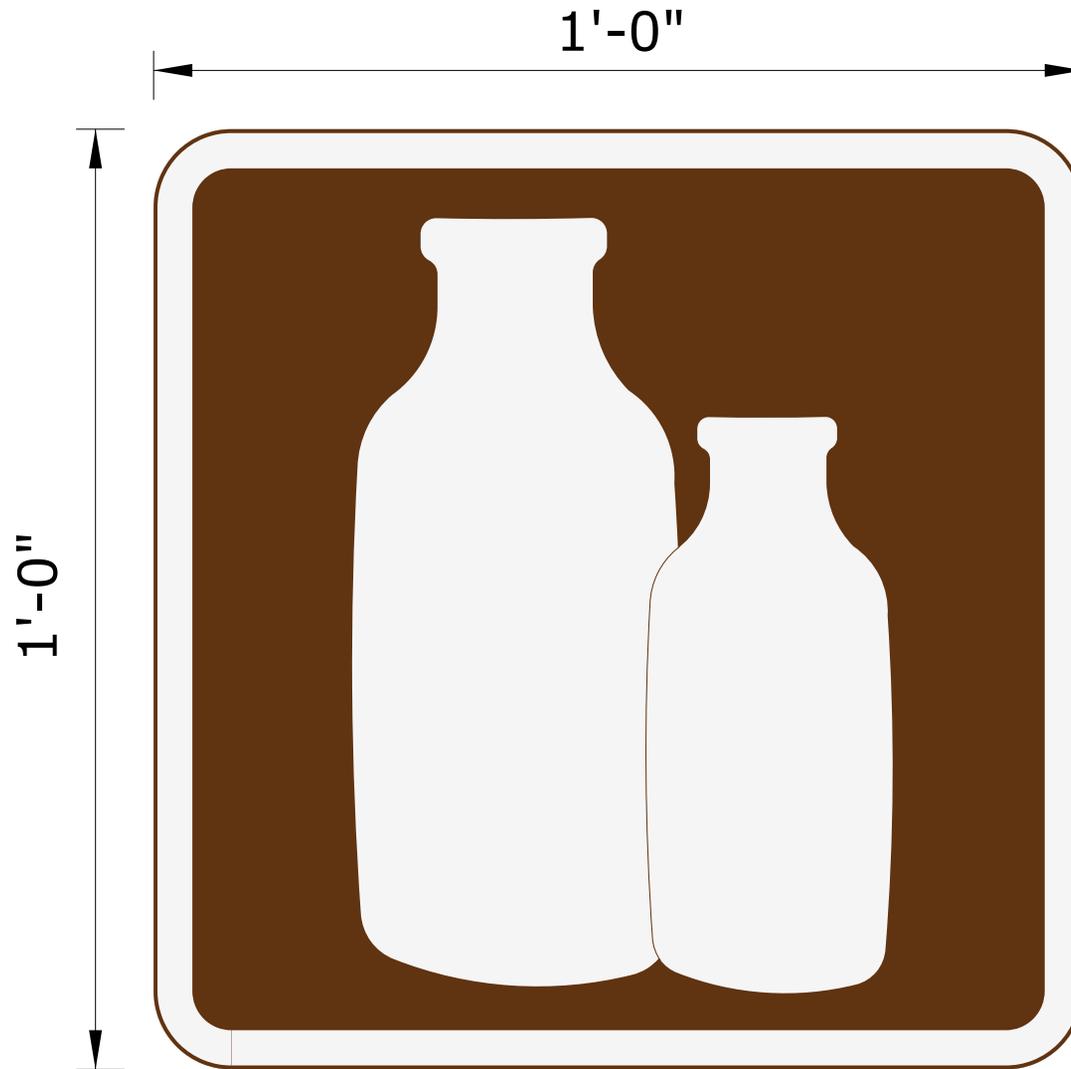

SIGN NUMBER	71-7921
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7921 to 71-7921.


PLOTTED : 12/18/18

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

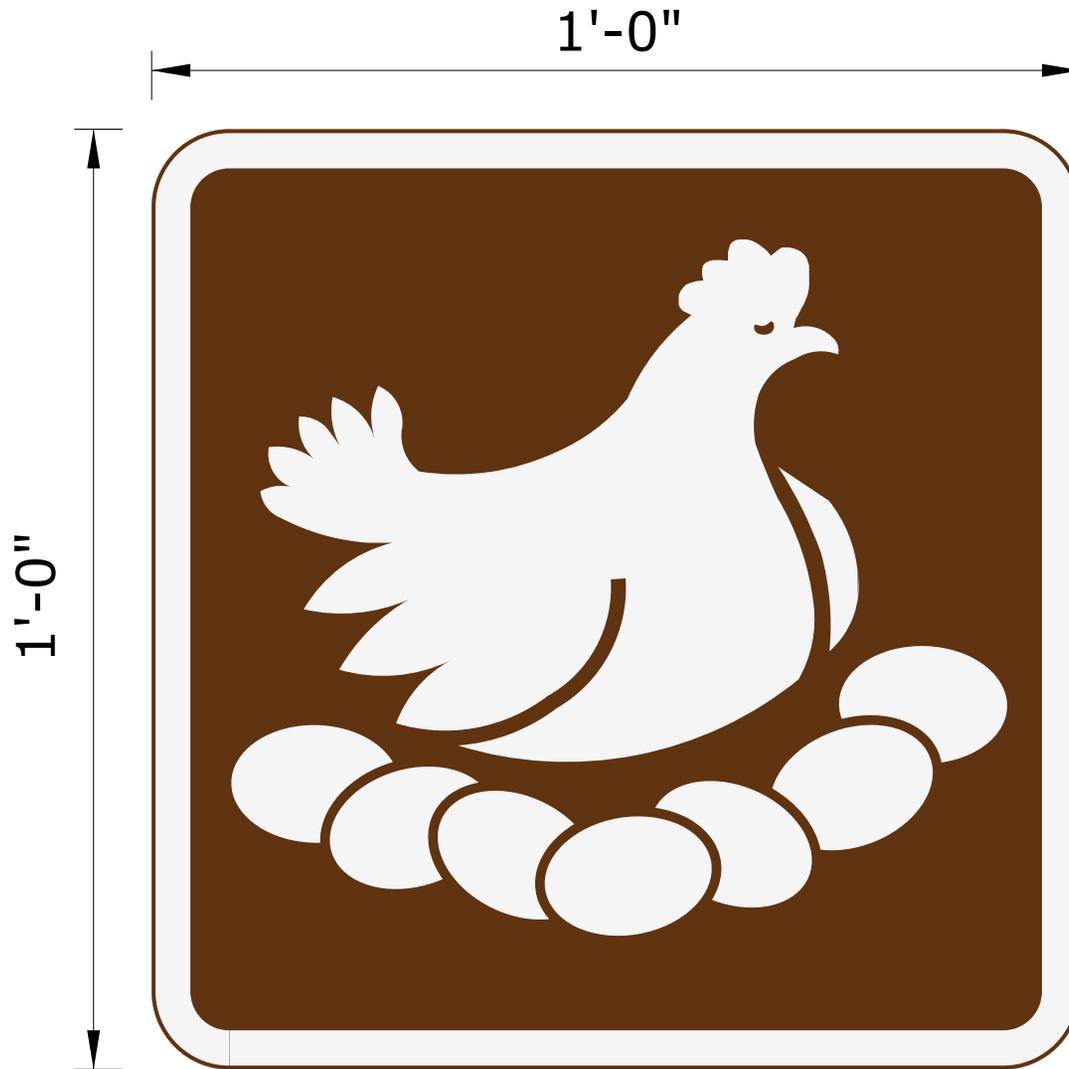

SIGN NUMBER	517922
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

REV'D /

PLOTTED : 4/9/2018

See 2nd page for Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

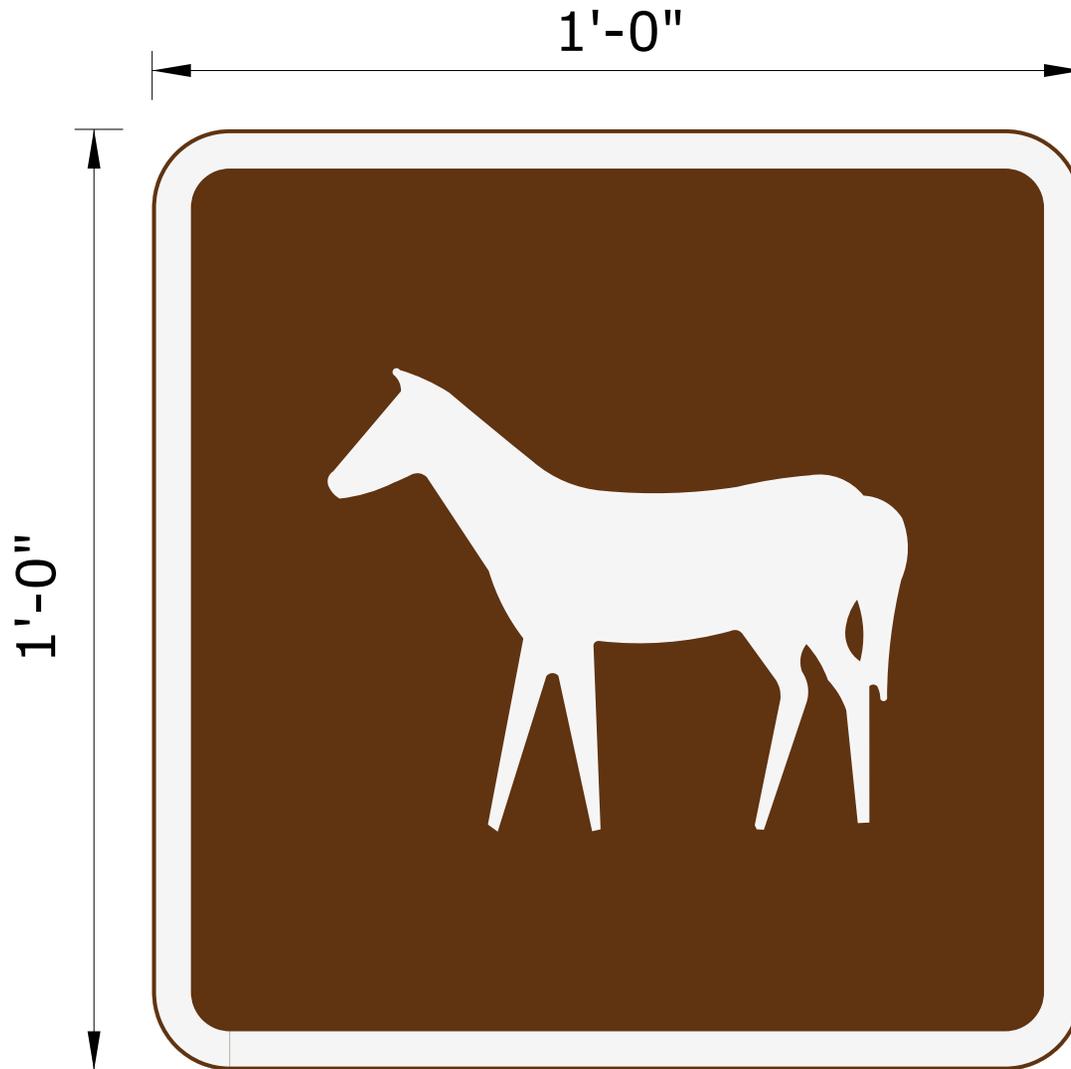

SIGN NUMBER	71-7923
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7923 to 71-7923

PLOTTED : 12/19/18

See 2nd page for Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum


Side Mounted

Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

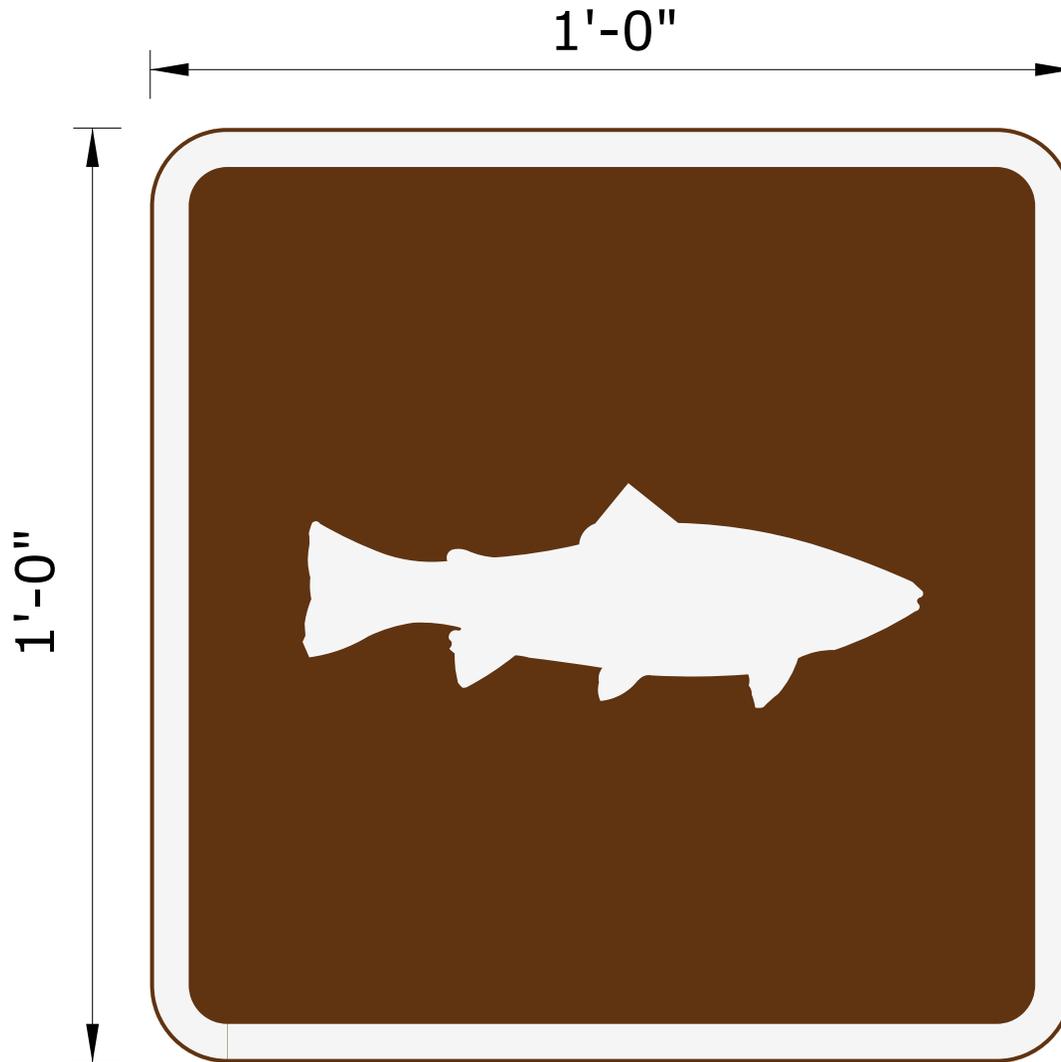


SIGN NUMBER	71-7924
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7924 to 71-7924.

PLOTTED : 12/19/18


See 2nd page for  
 Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :

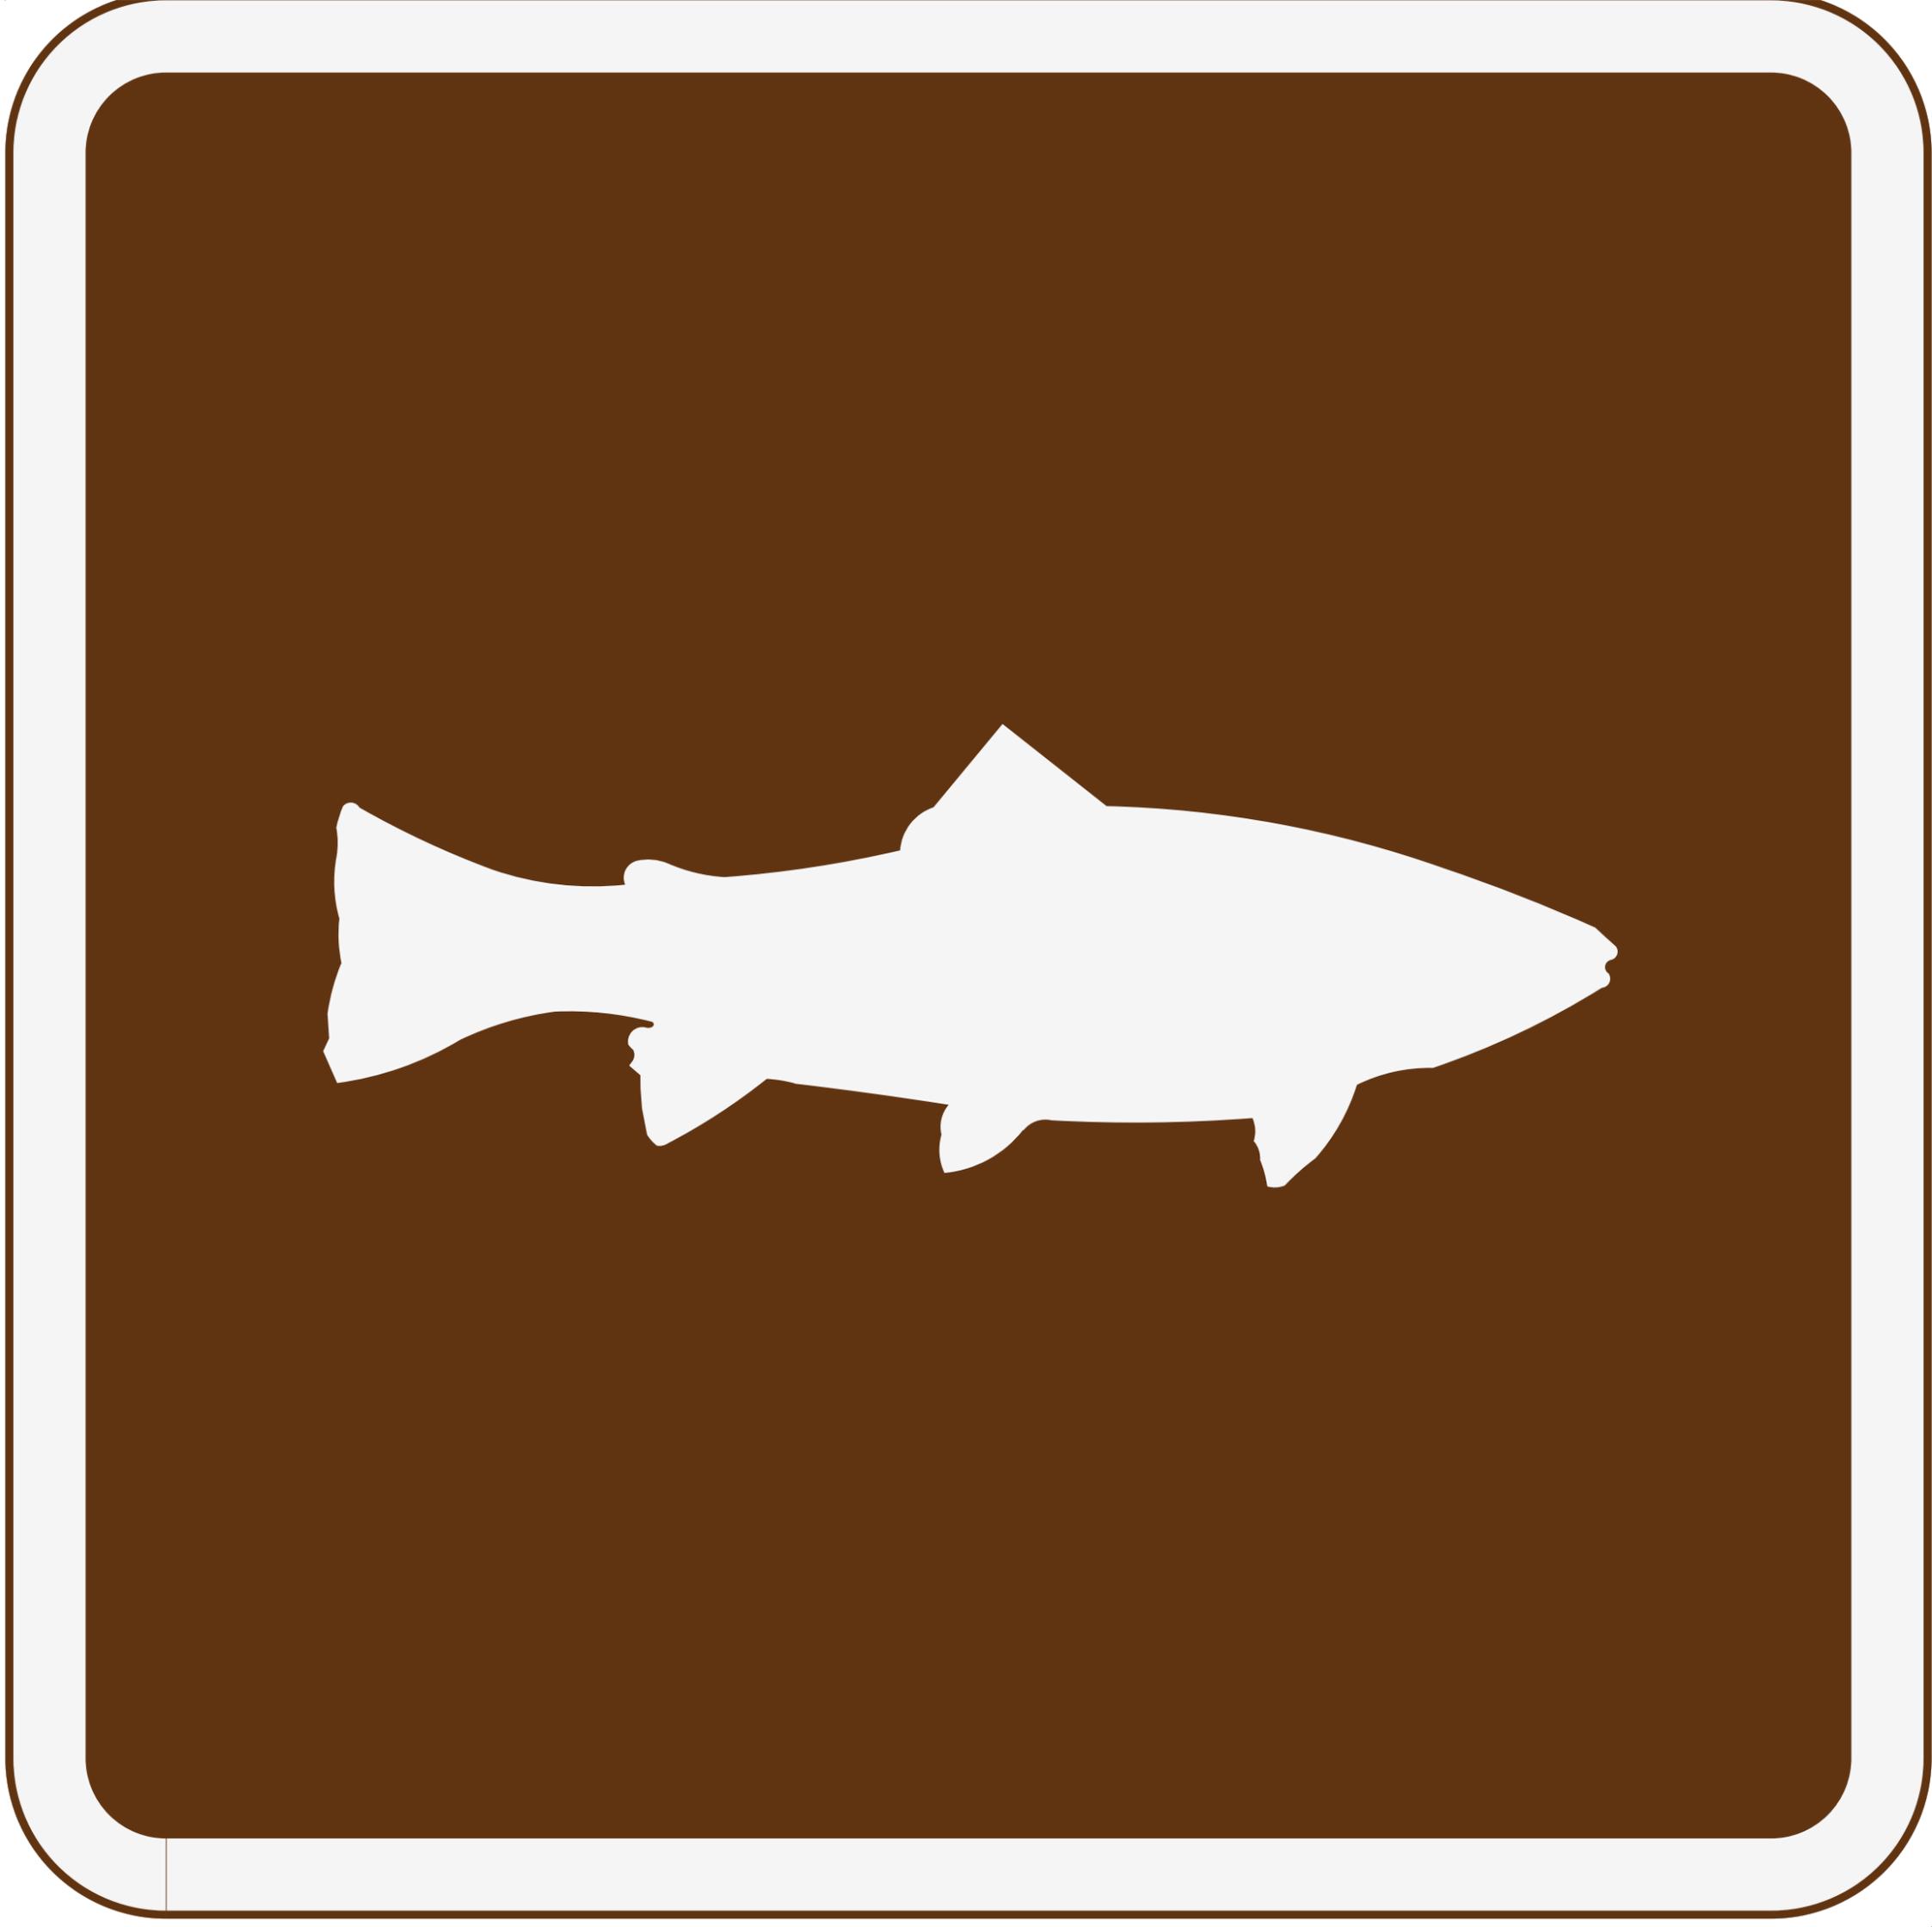



SIGN DETAIL

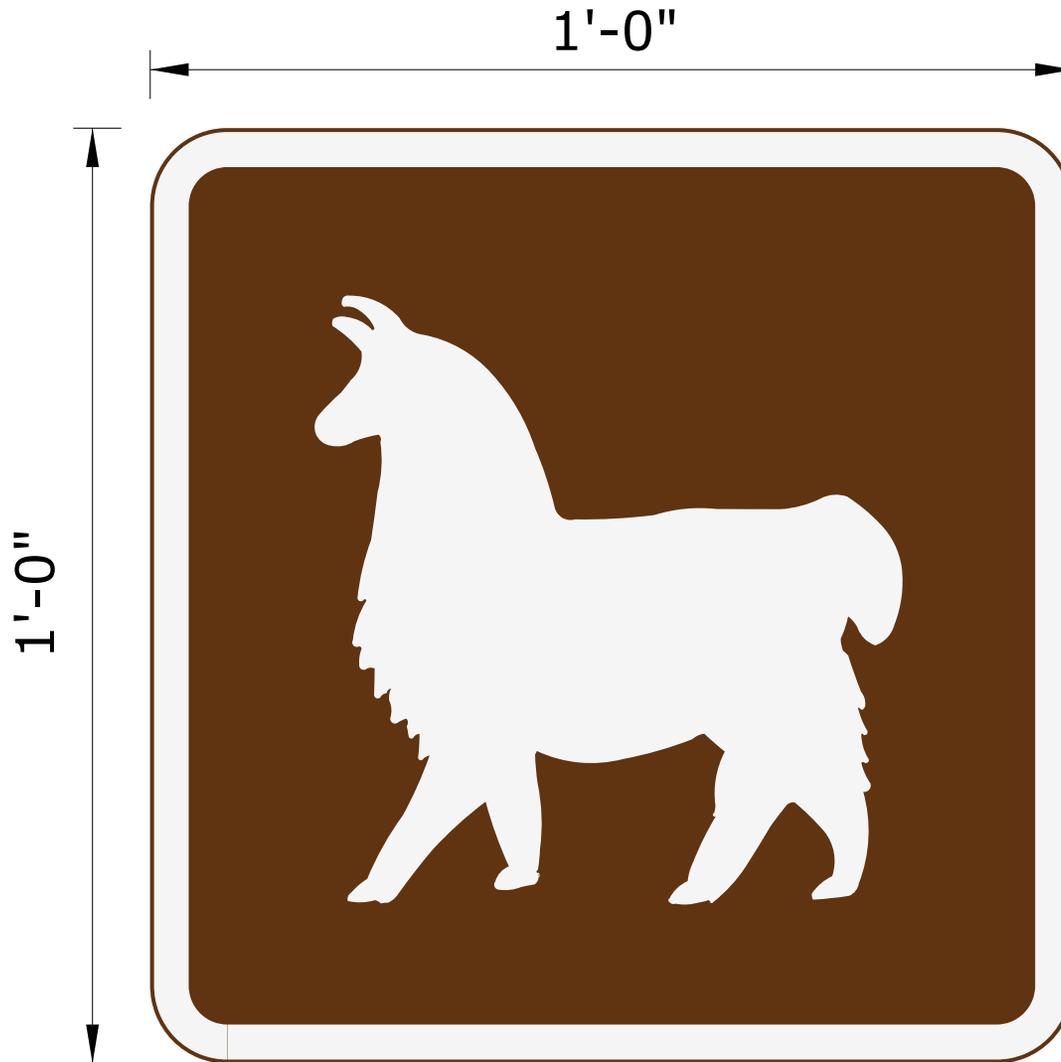

SIGN NUMBER	71-7926
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE. WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**

Changed sign # from 51-7926 to 71-7926.

PLOTTED : 12/19/18

See 2nd page for  
Full scale detail.

Dimensions are in inches.

Material : .040 Thk. Sheet Aluminum

Side Mounted


Location : N/A

Engineer : B. Schilling / Designed By : J. Fascione / Checked By :





SIGN DETAIL

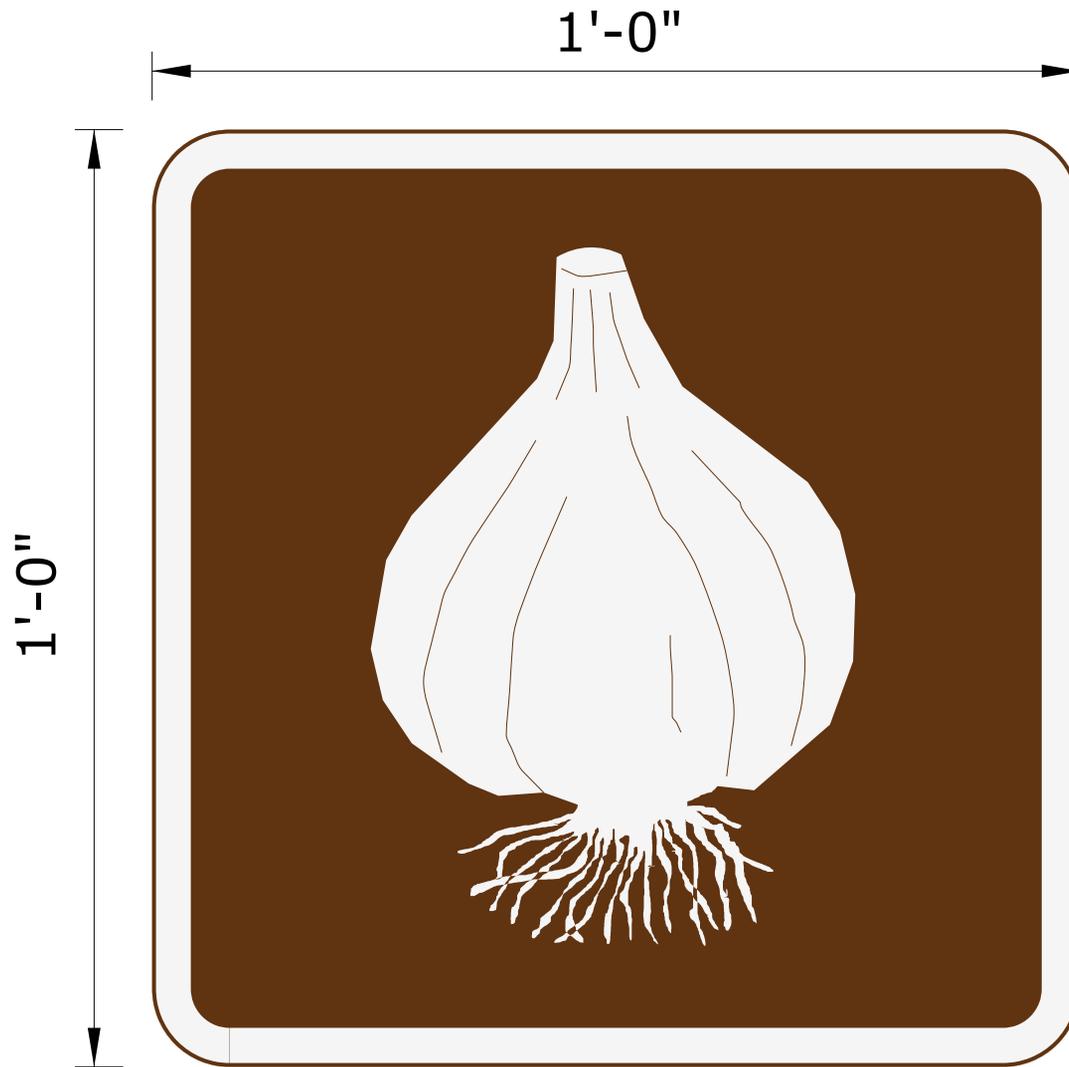

SIGN NUMBER	71-7928
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

**REV'D 12/18**  
 Changed sign # from 51-7928 to 71-7928.


PLOTTED : 12/19/18

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : B. Schilling / Designed By : J. Fascione / Checked By :



SIGN DETAIL

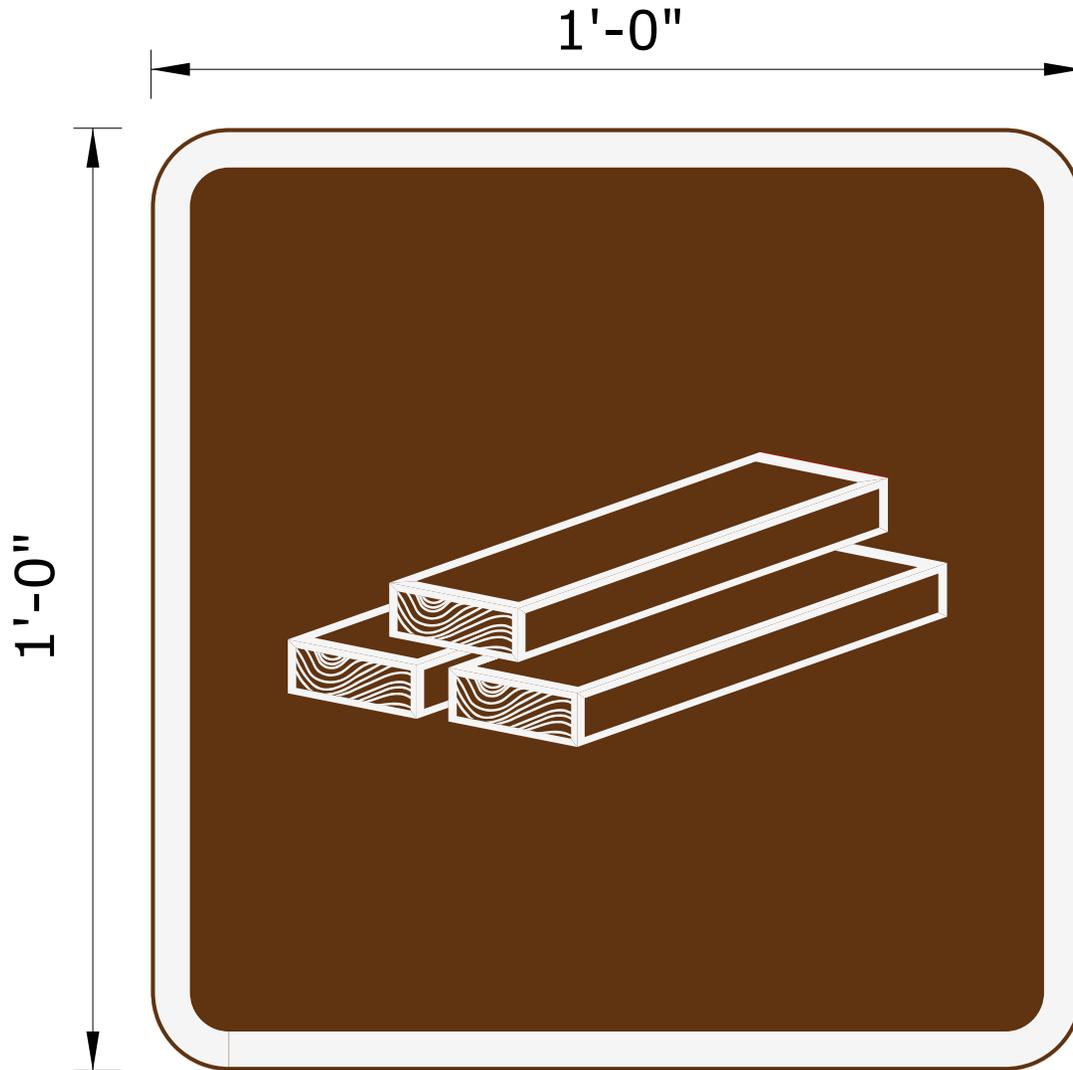


SIGN NUMBER	71-7929
SIGN PANEL	1'-0" x 1'-0"
TOTAL (Sq.ft.)	1.0
MUTCD	
BDR INSET/WIDTH	0" / 0.5"
CORNER RADIUS	.5"
BACKGROUND	TYPE: * COLOR: Brown
SYMBOL/BORDER	TYPE: * COLOR: White/White
* REFER TO CATALOG OF SIGNS FOR SHEETING TYPE, WHEN COLOR IS BLACK TYPE IS "PLAIN".	

REV'D /

PLOTTED : 4/24/19

See 2nd page for Full scale detail.

Dimensions are in inches.  
 Material : .040 Thk. Sheet Aluminum  
 Side Mounted  
 Location : N/A  
 Engineer : A. Mermelstein / Designed By : J. Fascione / Checked By :

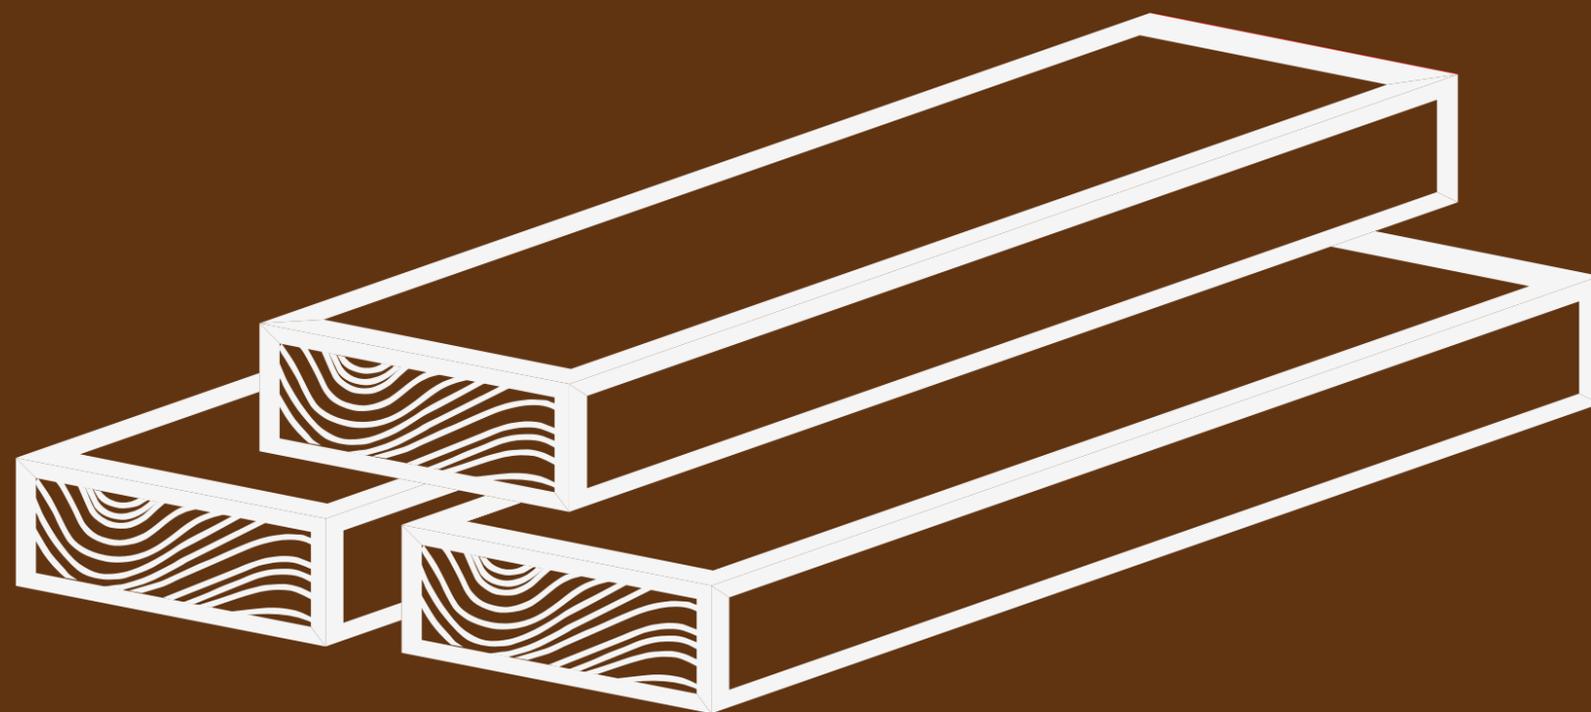



CONNECTICUT  
GROWN



*A Way of Life*